



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX150 S6, Intel Xeon processor X3210,
2.13 GHz

SPECint®_rate2006 = 54.3

SPECint_rate_base2006 = 47.9

CPU2006 license: 22


Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Oct-2007

Hardware Availability: Dec-2007

Software Availability: Nov-2007

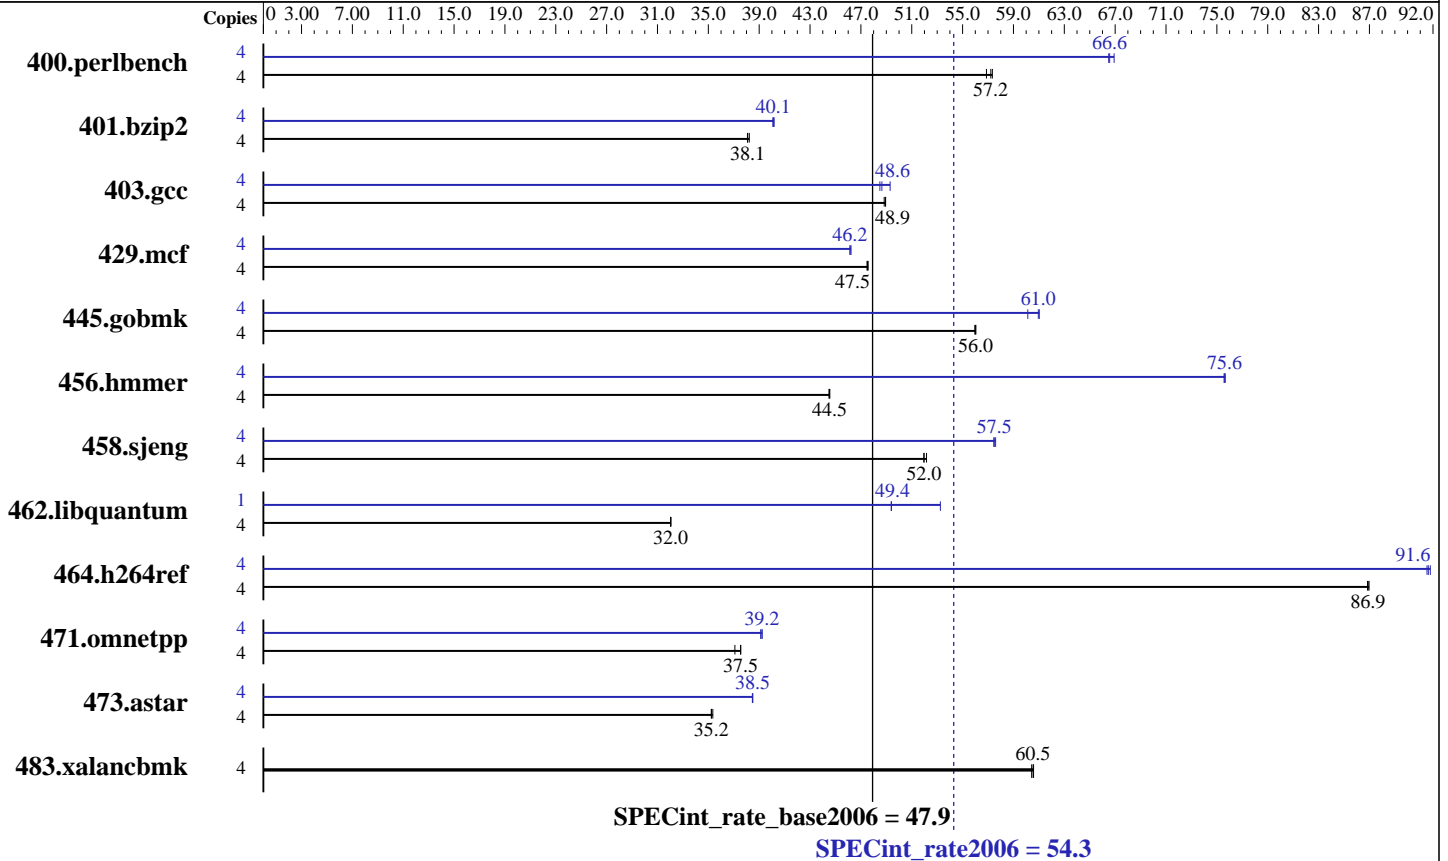

Hardware

CPU Name: Intel Xeon X3210
 CPU Characteristics: 1066 MHz system bus
 CPU MHz: 2133
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 4 GB (4x1 GB PC2-6400E, 2 rank, CAS 6-6-6, with ECC)
 Disk Subsystem: Fujitsu MAY2036RC (SAS, 36GB, 10000rpm)
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: Intel C++ Compiler for Linux32 and Linux64 Version 10.1 - Build 20070725
 Auto Parallel: Yes
 File System: ext2
 System State: Multiuser, Runlevel 3
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Smart Heap Library, Version 8.1
 binutils-2.17.tar.gz, Version 2.17



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX150 S6, Intel Xeon processor X3210,
2.13 GHz

SPECint_rate2006 = 54.3

SPECint_rate_base2006 = 47.9

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Oct-2007

Hardware Availability: Dec-2007

Software Availability: Nov-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	682	57.3	687	56.9	683	57.2	4	587	66.6	588	66.5	584	66.9
401.bzip2	4	1010	38.2	1014	38.1	1013	38.1	4	963	40.1	962	40.1	961	40.2
403.gcc	4	659	48.8	658	48.9	658	48.9	4	662	48.6	664	48.5	653	49.3
429.mcf	4	768	47.5	767	47.6	768	47.5	4	789	46.2	791	46.1	790	46.2
445.gobmk	4	749	56.0	749	56.0	750	56.0	4	698	60.1	687	61.0	688	61.0
456.hmmmer	4	839	44.5	838	44.5	838	44.6	4	494	75.6	494	75.6	493	75.7
458.sjeng	4	931	52.0	932	52.0	928	52.2	4	842	57.5	842	57.5	840	57.6
462.libquantum	4	2585	32.1	2587	32.0	2587	32.0	1	419	49.4	389	53.2	420	49.4
464.h264ref	4	1019	86.9	1019	86.8	1018	87.0	4	964	91.8	967	91.5	966	91.6
471.omnetpp	4	666	37.5	674	37.1	666	37.5	4	637	39.2	637	39.2	639	39.1
473.astar	4	794	35.4	797	35.2	797	35.2	4	730	38.5	730	38.5	729	38.5
483.xalancbmk	4	456	60.5	457	60.4	456	60.6	4	456	60.5	457	60.4	456	60.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

This result has been produced with binaries provided and compiled by Intel.

All binaries were built with 32-bit Intel compiler except:
401.bzip2 and 456.hmmmer in peak were built with 64-bit Intel compiler by changing the path for include and library files.

BIOS configuration:

Hardware Prefetch = Disable, Adjacent Sector Prefetch = Disable

For information about Fujitsu Siemens Computers please see:

<http://www.fujitsu-siemens.com>

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint_rate2006 = 54.3

PRIMERGY TX150 S6, Intel Xeon processor X3210,
2.13 GHz

SPECint_rate_base2006 = 47.9

CPU2006 license: 22

Test date: Oct-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Dec-2007

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-fast -inline-calloc -opt-malloc-options=3

C++ benchmarks:
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

401.bzip2: /home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/bin/icc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/include

456.hmmr: /home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/bin/icc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/include

C++ benchmarks:
icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmr: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX150 S6, Intel Xeon processor X3210,
2.13 GHz

SPECint_rate2006 = 54.3

SPECint_rate_base2006 = 47.9

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Oct-2007

Hardware Availability: Dec-2007

Software Availability: Nov-2007

Peak Portability Flags (Continued)

483.xalanbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias
-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch

403.gcc: -fast -inline-alloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo
-no-prec-div -ansi-alias

456.hmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll4 -Ob0 -prefetch
-opt-streaming-stores always -vec-guard-write
-opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap

483.xalanbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

PRIMERGY TX150 S6, Intel Xeon processor X3210,
2.13 GHz

SPECint_rate2006 = 54.3

SPECint_rate_base2006 = 47.9

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Oct-2007

Hardware Availability: Dec-2007

Software Availability: Nov-2007

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090713.02.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090713.02.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 14:33:05 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 27 November 2007.