



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®2006 = 18.7

PowerEdge SC1435 (AMD Opteron 2378, 2.40 GHz)

SPECint_base2006 = 15.5

CPU2006 license: 55


Test date: Dec-2008

Test sponsor: Dell Inc.

Hardware Availability: Nov-2008

Tested by: Dell Inc.

Software Availability: Oct-2008

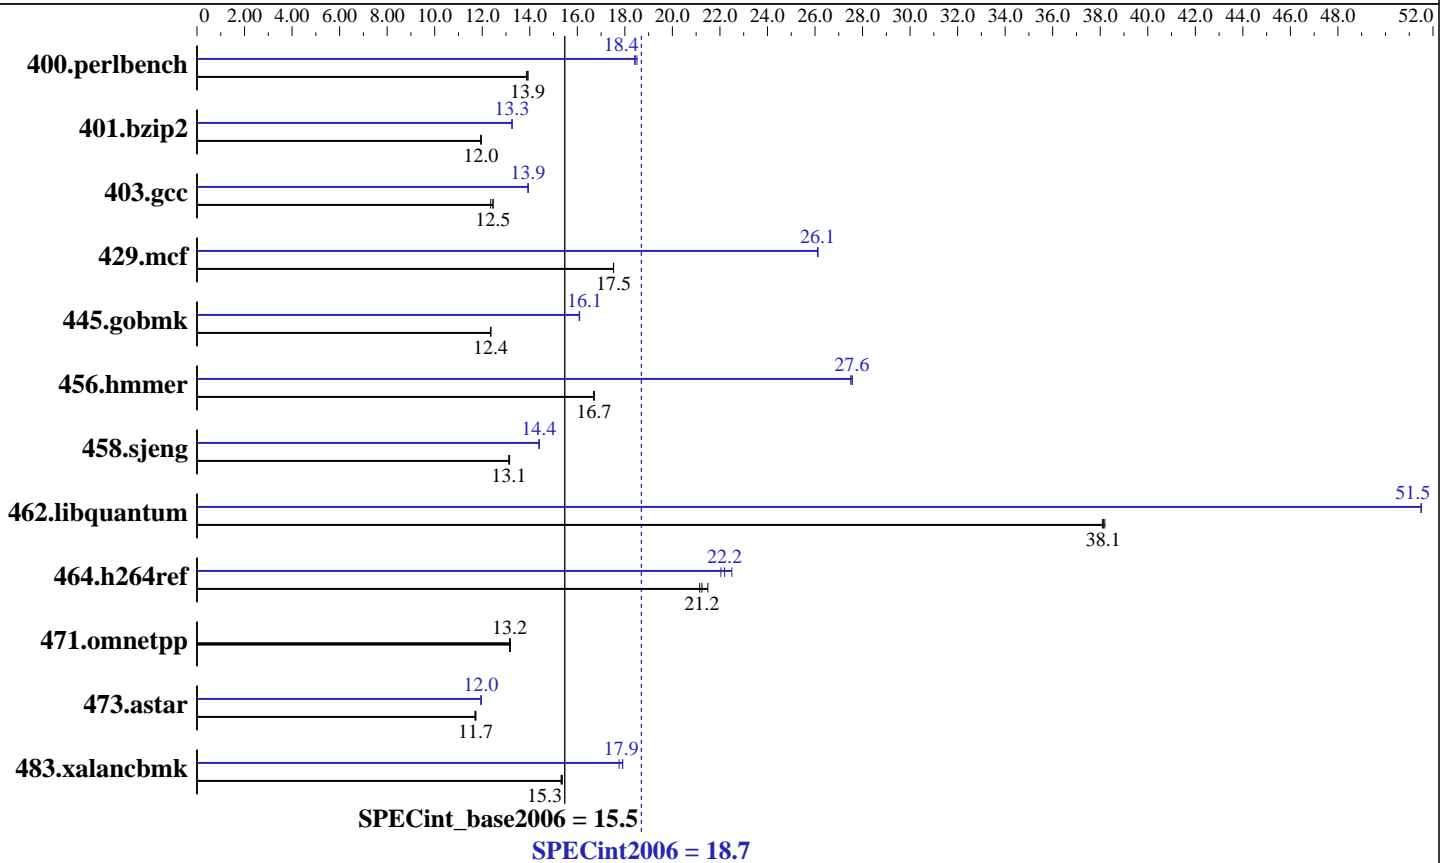

Hardware

CPU Name: AMD Opteron 2378
 CPU Characteristics:
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core
 L3 Cache: 6 MB I+D on chip per chip
 Other Cache: None
 Memory: 32 GB (8 x 4 GB DDR2-800)
 Disk Subsystem: 1 x 80 GB 7200 RPM SATA
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
 Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.2
 Auto Parallel: No
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: binutils 2.18 32-bit and 64-bit libhugetlbfs libraries SmartHeap 8.1 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 18.7

PowerEdge SC1435 (AMD Opteron 2378, 2.40 GHz)

SPECint_base2006 = 15.5

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Dec-2008
Hardware Availability: Nov-2008
Software Availability: Oct-2008

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	702	13.9	<u>702</u>	<u>13.9</u>	705	13.9	<u>530</u>	<u>18.4</u>	528	18.5	531	18.4
401.bzip2	<u>808</u>	<u>12.0</u>	808	11.9	807	12.0	728	13.3	728	13.3	<u>728</u>	<u>13.3</u>
403.gcc	651	12.4	646	12.5	<u>646</u>	<u>12.5</u>	578	13.9	<u>578</u>	<u>13.9</u>	578	13.9
429.mcf	520	17.5	521	17.5	<u>520</u>	<u>17.5</u>	349	26.1	349	26.1	<u>349</u>	<u>26.1</u>
445.gobmk	849	12.4	849	12.4	<u>849</u>	<u>12.4</u>	<u>652</u>	<u>16.1</u>	652	16.1	652	16.1
456.hammer	<u>559</u>	<u>16.7</u>	559	16.7	558	16.7	338	27.6	<u>339</u>	<u>27.6</u>	339	27.5
458.sjeng	<u>922</u>	<u>13.1</u>	922	13.1	920	13.2	<u>841</u>	<u>14.4</u>	841	14.4	840	14.4
462.libquantum	<u>543</u>	<u>38.1</u>	542	38.2	544	38.1	402	51.5	<u>402</u>	<u>51.5</u>	402	51.5
464.h264ref	<u>1042</u>	<u>21.2</u>	1030	21.5	1046	21.2	1004	22.0	<u>997</u>	<u>22.2</u>	983	22.5
471.omnetpp	475	13.2	474	13.2	<u>475</u>	<u>13.2</u>	475	13.2	474	13.2	<u>475</u>	<u>13.2</u>
473.astar	<u>599</u>	<u>11.7</u>	600	11.7	598	11.7	<u>587</u>	<u>12.0</u>	588	11.9	587	12.0
483.xalancbmk	450	15.3	449	15.4	<u>450</u>	<u>15.3</u>	<u>385</u>	<u>17.9</u>	385	17.9	389	17.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores

Operating System Notes

The libhugetlbfs libraries were installed using the installation rpms that came with the distribution.

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=7146 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

General Notes

Environment variables set by runspec before the start of the run:
HUGETLB_MORECORE = "yes"
LD_LIBRARY_PATH = "/root/cpu2006_1.1/amd909gh-libs/64:/root/cpu2006_1.1/amd909gh-libs/32"



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 18.7

PowerEdge SC1435 (AMD Opteron 2378, 2.40 GHz)

SPECint_base2006 = 15.5

CPU2006 license: 55

Test date: Dec-2008

Test sponsor: Dell Inc.

Hardware Availability: Nov-2008

Tested by: Dell Inc.

Software Availability: Oct-2008

Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 403.gcc: -DSPEC_CPU_LP64
 429.mcf: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

C++ benchmarks:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
--zc_eh -Mipa=fast -Mipa=inline:10 -tp barcelona-32 -Bstatic_pgi

Base Other Flags

C benchmarks:

-Mipa=jobs:4

C++ benchmarks:

-Mipa=jobs:4

Peak Compiler Invocation

C benchmarks (except as noted below):

pathcc

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 18.7

PowerEdge SC1435 (AMD Opteron 2378, 2.40 GHz)

SPECint_base2006 = 15.5

CPU2006 license: 55

Test date: Dec-2008

Test sponsor: Dell Inc.

Hardware Availability: Nov-2008

Tested by: Dell Inc.

Software Availability: Oct-2008

Peak Compiler Invocation (Continued)

456.hmmcr: pgcc

462.libquantum: pgcc

C++ benchmarks (except as noted below):

pgcpp

483.xalancbmk: pathCC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmcr: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2)
 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
 -L/usr/lib64 -lhugetlbfs(pass 2) -Ofast -IPA:plimit=20000
 -IPA:field_reorder=on -LNO:opt=0 -WOPT:if_conv=0
 -CG:local_sched_alg=1

401.bzip2: -march=barcelona -O3 -OPT:alias=disjoint -OPT:Ofast
 -OPT:goto=off -INLINE:aggressive=on -CG:local_sched_alg=1
 -m3dnow
 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
 -L/usr/lib64 -lhugetlbfs

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -OPT:malloc_alg=1
 -LNO:trip_count=256 -LNO:prefetch_ahead=10
 -CG:prefer_lru_reg=off -m32

429.mcf: -march=barcelona -O3 -ipa -INLINE:aggressive=on
 -CG:gcm=off -GRA:prioritize_by_density=on -m32
 -L/usr/lib -lhugetlbfs

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 18.7

PowerEdge SC1435 (AMD Opteron 2378, 2.40 GHz)

SPECint_base2006 = 15.5

CPU2006 license: 55

Test date: Dec-2008

Test sponsor: Dell Inc.

Hardware Availability: Nov-2008

Tested by: Dell Inc.

Software Availability: Oct-2008

Peak Optimization Flags (Continued)

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2)
 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
 -L/usr/lib64 -lhugetlbfs(pass 2) -O3 -OPT:alias=restrict
 -LNO:prefetch=1 -LNO:ignore_feedback=off -CG:p2align=on

456.hmmcr: -Mvect=cachesize:6291456 -fastsse -Mvect=partial
 -Munroll=n:8 -Msmartalloc=huge -Msafeptr -Mprefetch=t0
 -Mfprelaxed -Mipa=const -Mipa=ptr -Mipa=arg -Mipa=inline
 -tp barcelona-64 -Bstatic_pgi

458.sjeng: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2)
 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
 -L/usr/lib64 -lhugetlbfs(pass 2) -O3 -ipa
 -LNO:ignore_feedback=off -LNO:full_unroll=10 -LNO:fusion=0
 -LNO:fission=2 -IPA:pu_reorder=2 -CG:ptr_load_use=0
 -OPT:unroll_times_max=8 -INLINE:aggressive=on

462.libquantum: -Mvect=cachesize:6291456 -fastsse -Munroll=m:8
 -Msmartalloc=huge -Mprefetch=distance:4 -Mfprelaxed
 -Mipa=fast -Mipa=inline -Mipa=noarg -tp barcelona-64
 -Bstatic_pgi

464.h264ref: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2)
 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
 -L/usr/lib64 -lhugetlbfs(pass 2) -O3 -IPA:plimit=20000
 -OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0
 -CG:push_pop_int_saved_regs=off -CG:prefer_lru_reg=off

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -Mphi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
 -Mipa=inline:6(pass 2) -Mvect=cachesize:6291456 -fastsse
 -O4 -Msmartalloc=huge -Msafeptr=global -Mfprelaxed
 --zc_eh -tp barcelona-32 -Bstatic_pgi

483.xalancbmk: -march=barcelona -Ofast -INLINE:aggressive=on -m32
 -L/root/work/libraries/SmartHeap_8.1/lib -lsmarheap

Peak Other Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 18.7

PowerEdge SC1435 (AMD Opteron 2378, 2.40 GHz)

SPECint_base2006 = 15.5

CPU2006 license: 55

Test date: Dec-2008

Test sponsor: Dell Inc.

Hardware Availability: Nov-2008

Tested by: Dell Inc.

Software Availability: Oct-2008

Peak Other Flags (Continued)

456.hmmer: -Mipa=jobs:4

462.libquantum: -Mipa=jobs:4

C++ benchmarks (except as noted below):
-Mipa=jobs:4(pass 2)

483.xalancbmk: No flags used

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/pgi72_linux_flags.20090713.html

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.html

<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2006/flags/pgi72_linux_flags.20090713.xml

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.xml

<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 21:35:13 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 December 2008.