



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp®_rate2006 = 114

ProLiant BL460c G6
(2.00 GHz, Intel Xeon E5504)

SPECfp_rate_base2006 = 110

CPU2006 license: 3


Test date: May-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2009

Tested by: Hewlett-Packard Company

Software Availability: Feb-2009

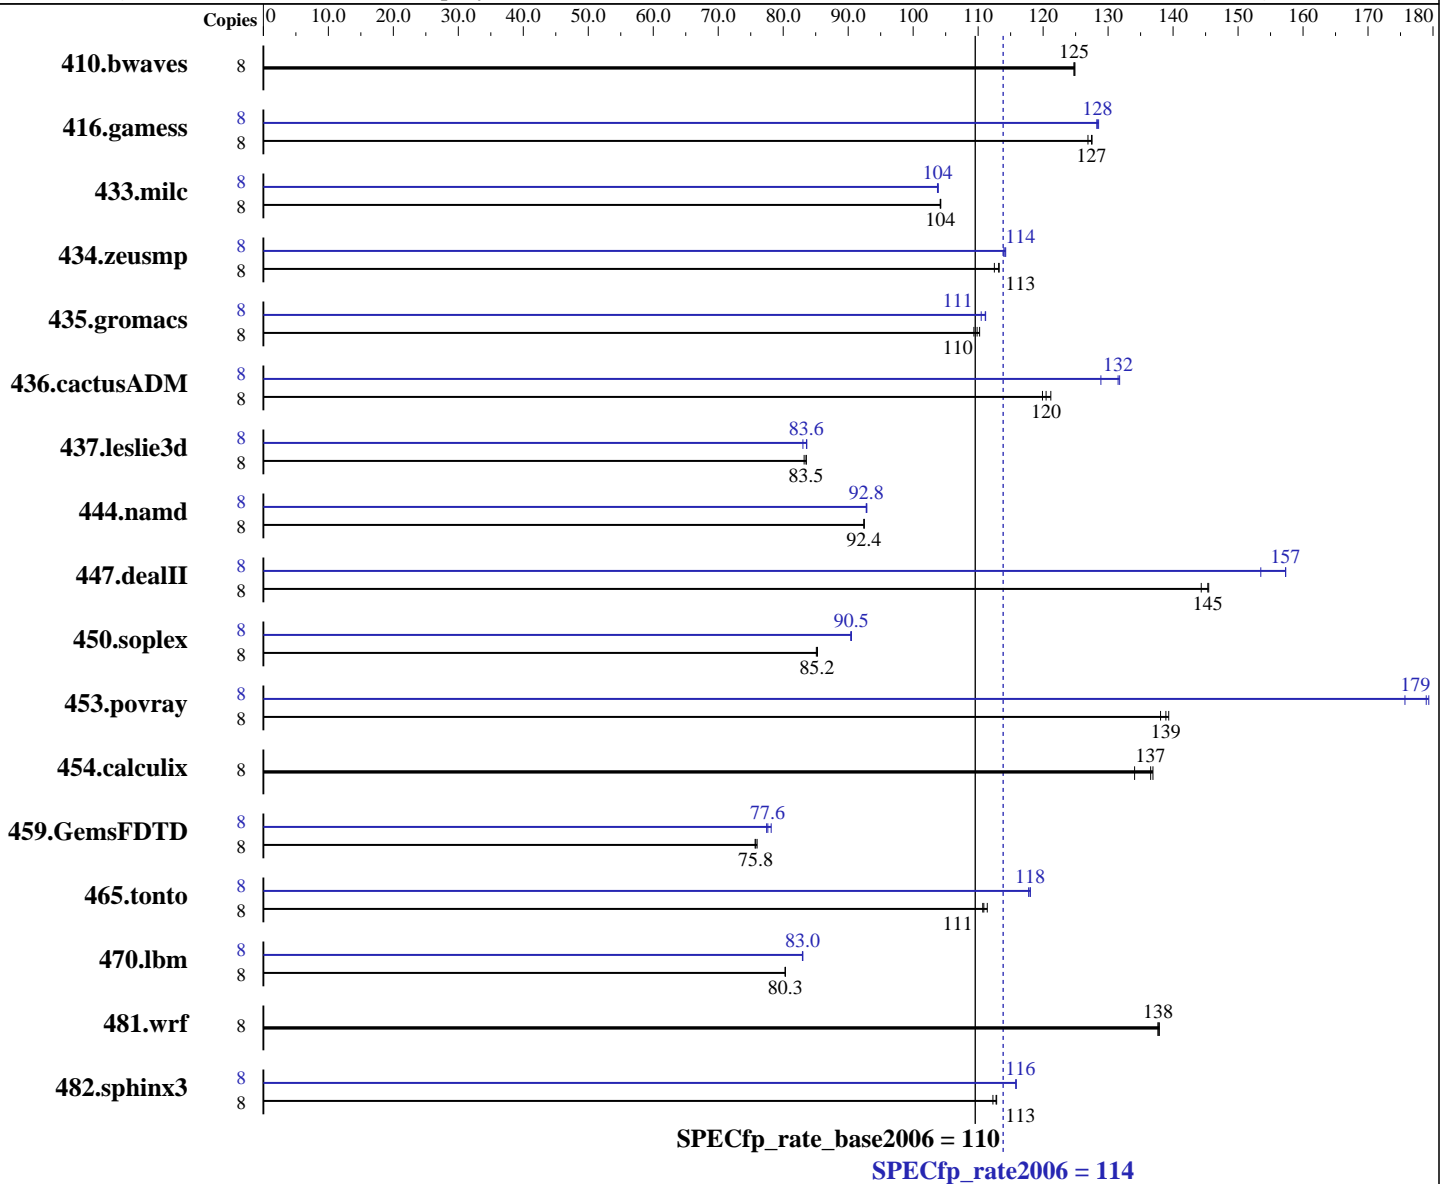

Hardware

CPU Name: Intel Xeon E5504
 CPU Characteristics:
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 5.3
 Kernel 2.6.18-128.el5
 Compiler: Intel C++ and Fortran Compiler 11.0 for Linux
 Build 20090131 Package ID: l_cproc_p_11.0.080,
 l_cprof_p_11.0.080
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 114

ProLiant BL460c G6
(2.00 GHz, Intel Xeon E5504)

SPECfp_rate_base2006 = 110

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: May-2009
Hardware Availability: Mar-2009
Software Availability: Feb-2009

L3 Cache: 4 MB I+D on chip per chip
Other Cache: None
Memory: 24 GB (6x4 GB PC3-10600R CL9)
Disk Subsystem: 2x146 GB 10 K SAS
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---------------|--------|-------------|-------------|-------------|-------------|------------|------------|--------|------------|-------------|-------------|-------------|-------------|------------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 410.bwaves | 8 | 871 | 125 | 870 | 125 | 871 | 125 | 8 | 871 | 125 | 870 | 125 | 871 | 125 |
| 416.gamess | 8 | 1229 | 127 | 1228 | 128 | 1234 | 127 | 8 | 1219 | 129 | 1221 | 128 | 1220 | 128 |
| 433.milc | 8 | 705 | 104 | 705 | 104 | 705 | 104 | 8 | 708 | 104 | 707 | 104 | 707 | 104 |
| 434.zeusmp | 8 | 643 | 113 | 647 | 112 | 643 | 113 | 8 | 638 | 114 | 639 | 114 | 637 | 114 |
| 435.gromacs | 8 | 518 | 110 | 522 | 109 | 520 | 110 | 8 | 514 | 111 | 514 | 111 | 517 | 110 |
| 436.cactusADM | 8 | 794 | 120 | 797 | 120 | 789 | 121 | 8 | 742 | 129 | 727 | 132 | 725 | 132 |
| 437.leslie3d | 8 | 900 | 83.5 | 900 | 83.5 | 904 | 83.2 | 8 | 906 | 83.0 | 900 | 83.6 | 899 | 83.6 |
| 444.namd | 8 | 694 | 92.4 | 694 | 92.4 | 694 | 92.5 | 8 | 691 | 92.8 | 691 | 92.9 | 691 | 92.8 |
| 447.dealII | 8 | 634 | 144 | 630 | 145 | 629 | 145 | 8 | 582 | 157 | 596 | 153 | 582 | 157 |
| 450.soplex | 8 | 782 | 85.3 | 783 | 85.2 | 784 | 85.1 | 8 | 737 | 90.5 | 737 | 90.5 | 738 | 90.4 |
| 453.povray | 8 | 308 | 138 | 305 | 139 | 306 | 139 | 8 | 238 | 179 | 242 | 176 | 237 | 179 |
| 454.calculix | 8 | 482 | 137 | 483 | 137 | 492 | 134 | 8 | 482 | 137 | 483 | 137 | 492 | 134 |
| 459.GemsFDTD | 8 | 1117 | 76.0 | 1120 | 75.8 | 1122 | 75.7 | 8 | 1086 | 78.1 | 1093 | 77.6 | 1096 | 77.4 |
| 465.tonto | 8 | 707 | 111 | 711 | 111 | 710 | 111 | 8 | 668 | 118 | 667 | 118 | 667 | 118 |
| 470.lbm | 8 | 1368 | 80.3 | 1369 | 80.3 | 1368 | 80.3 | 8 | 1324 | 83.0 | 1324 | 83.0 | 1325 | 83.0 |
| 481.wrf | 8 | 649 | 138 | 649 | 138 | 648 | 138 | 8 | 649 | 138 | 649 | 138 | 648 | 138 |
| 482.sphinx3 | 8 | 1383 | 113 | 1382 | 113 | 1389 | 112 | 8 | 1346 | 116 | 1346 | 116 | 1346 | 116 |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Platform Notes

BIOS configuration:
HP Power Profile set to Maximum Performance
HP Power Regulator set to HP Static High Performance Mode
Thermal Configuration set to Increased Cooling



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 114

ProLiant BL460c G6
(2.00 GHz, Intel Xeon E5504)

SPECfp_rate_base2006 = 110

CPU2006 license: 3

Test date: May-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2009

Tested by: Hewlett-Packard Company

Software Availability: Feb-2009

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 114

ProLiant BL460c G6
(2.00 GHz, Intel Xeon E5504)

SPECfp_rate_base2006 = 110

CPU2006 license: 3

Test date: May-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2009

Tested by: Hewlett-Packard Company

Software Availability: Feb-2009

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc

450.soplex: icpc -m32

Fortran benchmarks (except as noted below):

ifort

437.leslie3d: ifort -m32

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 444.namd: -DSPEC_CPU_LP64
 447.deallI: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
 -fno-alias

470.lbm: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
 -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 114

ProLiant BL460c G6
(2.00 GHz, Intel Xeon E5504)

SPECfp_rate_base2006 = 110

CPU2006 license: 3

Test date: May-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2009

Tested by: Hewlett-Packard Company

Software Availability: Feb-2009

Peak Optimization Flags (Continued)

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)

437.leslie3d: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -opt-prefetch

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 114

ProLiant BL460c G6
(2.00 GHz, Intel Xeon E5504)

SPECfp_rate_base2006 = 110

CPU2006 license: 3

Test date: May-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2009

Tested by: Hewlett-Packard Company

Software Availability: Feb-2009

Peak Optimization Flags (Continued)

436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -opt-prefetch -auto-ilp32

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20090710.html>

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090710.13.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20090710.xml>

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090710.13.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 00:28:24 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 May 2009.