



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint[®]2006 = 22.7

PowerEdge M905 (AMD Opteron 8393 SE, 3.10 GHz)

SPECint_base2006 = 18.8

CPU2006 license: 55


Test date: Apr-2009

Test sponsor: Dell Inc.

Hardware Availability: May-2009

Tested by: Dell Inc.

Software Availability: Oct-2008

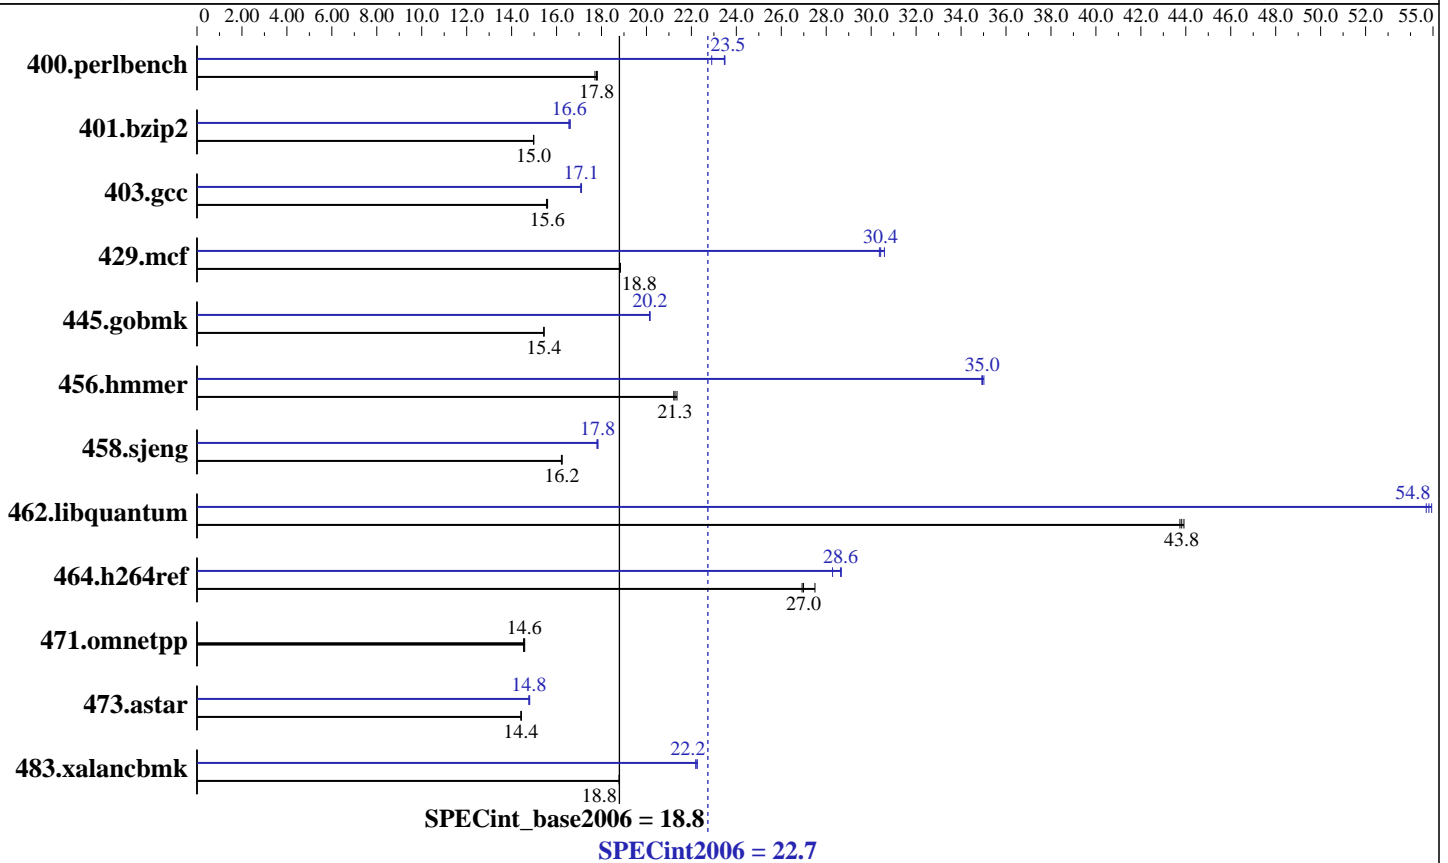

Hardware

CPU Name: AMD Opteron 8393 SE
 CPU Characteristics: 3100
 CPU MHz: Integrated
 FPU: 16 cores, 4 chips, 4 cores/chip
 CPU(s) enabled: 4 chips
 CPU(s) orderable: 64 KB I + 64 KB D on chip per core
 Primary Cache: 512 KB I+D on chip per core
 Secondary Cache: 6 MB I+D on chip per chip
 L3 Cache: None
 Other Cache: None
 Memory: 64 GB (16 x 4 GB DDR2-800)
 Disk Subsystem: 1 x 73 GB 15000 RPM SAS
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 5.3, Kernel 2.6.18-128.el5
 Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.2
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: binutils 2.18
 32-bit and 64-bit libhugetlbfs libraries
 SmartHeap 8.1 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 22.7

PowerEdge M905 (AMD Opteron 8393 SE, 3.10 GHz)

SPECint_base2006 = 18.8

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Apr-2009
Hardware Availability: May-2009
Software Availability: Oct-2008

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	548	17.8	552	17.7	<u>550</u>	<u>17.8</u>	427	22.9	<u>416</u>	<u>23.5</u>	416	23.5
401.bzip2	644	15.0	645	15.0	<u>644</u>	<u>15.0</u>	<u>583</u>	<u>16.6</u>	581	16.6	583	16.6
403.gcc	518	15.6	<u>517</u>	<u>15.6</u>	516	15.6	<u>471</u>	<u>17.1</u>	470	17.1	471	17.1
429.mcf	484	18.8	<u>484</u>	<u>18.8</u>	485	18.8	298	30.6	<u>300</u>	<u>30.4</u>	300	30.4
445.gobmk	679	15.4	680	15.4	<u>679</u>	<u>15.4</u>	521	20.1	<u>521</u>	<u>20.2</u>	520	20.2
456.hammer	440	21.2	<u>439</u>	<u>21.3</u>	437	21.4	<u>267</u>	<u>35.0</u>	267	34.9	266	35.0
458.sjeng	745	16.2	<u>745</u>	<u>16.2</u>	746	16.2	678	17.8	680	17.8	<u>679</u>	<u>17.8</u>
462.libquantum	472	43.9	474	43.7	<u>473</u>	<u>43.8</u>	379	54.7	<u>378</u>	<u>54.8</u>	377	54.9
464.h264ref	805	27.5	822	26.9	<u>820</u>	<u>27.0</u>	772	28.7	782	28.3	<u>773</u>	<u>28.6</u>
471.omnetpp	429	14.6	<u>429</u>	<u>14.6</u>	430	14.5	429	14.6	<u>429</u>	<u>14.6</u>	430	14.5
473.astar	487	14.4	<u>487</u>	<u>14.4</u>	486	14.4	475	14.8	474	14.8	<u>475</u>	<u>14.8</u>
483.xalancbmk	367	18.8	<u>367</u>	<u>18.8</u>	367	18.8	310	22.3	311	22.2	<u>311</u>	<u>22.2</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores

Operating System Notes

The libhugetlbfs libraries were installed using the installation RPMs that came with the distribution.

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=14336 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

General Notes

Environment variables set by runspec before the start of the run:
HUGETLB_MORECORE = "yes"
LD_LIBRARY_PATH = "/root/cpu2006-1.1/amd909gh-libs/64:/root/cpu2006-1.1/amd909gh-libs/32"



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 22.7

PowerEdge M905 (AMD Opteron 8393 SE, 3.10 GHz)

SPECint_base2006 = 18.8

CPU2006 license: 55

Test date: Apr-2009

Test sponsor: Dell Inc.

Hardware Availability: May-2009

Tested by: Dell Inc.

Software Availability: Oct-2008

Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 403.gcc: -DSPEC_CPU_LP64
 429.mcf: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

C++ benchmarks:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
--zc_eh -Mipa=fast -Mipa=inline:10 -tp barcelona-32 -Bstatic_pgi

Base Other Flags

C benchmarks:

-Mipa=jobs:4

C++ benchmarks:

-Mipa=jobs:4

Peak Compiler Invocation

C benchmarks (except as noted below):

pathcc

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 22.7

PowerEdge M905 (AMD Opteron 8393 SE, 3.10 GHz)

SPECint_base2006 = 18.8

CPU2006 license: 55

Test date: Apr-2009

Test sponsor: Dell Inc.

Hardware Availability: May-2009

Tested by: Dell Inc.

Software Availability: Oct-2008

Peak Compiler Invocation (Continued)

456.hmmcr: pgcc

462.libquantum: pgcc

C++ benchmarks (except as noted below):

pgcpp

483.xalancbmk: pathCC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmcr: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2)
 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
 -L/usr/lib64 -lhugetlbfs(pass 2) -Ofast -IPA:plimit=20000
 -IPA:field_reorder=on -LNO:opt=0 -WOPT:if_conv=0
 -CG:local_sched_alg=1

401.bzip2: -march=barcelona -O3 -OPT:alias=disjoint -OPT:Ofast
 -OPT:goto=off -INLINE:aggressive=on -CG:local_sched_alg=1
 -m3dnow
 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
 -L/usr/lib64 -lhugetlbfs

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -OPT:malloc_alg=1
 -LNO:trip_count=256 -LNO:prefetch_ahead=10
 -CG:prefer_lru_reg=off -m32

429.mcf: -march=barcelona -O3 -ipa -INLINE:aggressive=on
 -CG:gcm=off -GRA:prioritize_by_density=on -m32
 -L/usr/lib -lhugetlbfs

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 22.7

PowerEdge M905 (AMD Opteron 8393 SE, 3.10 GHz)

SPECint_base2006 = 18.8

CPU2006 license: 55

Test date: Apr-2009

Test sponsor: Dell Inc.

Hardware Availability: May-2009

Tested by: Dell Inc.

Software Availability: Oct-2008

Peak Optimization Flags (Continued)

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2)
 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
 -L/usr/lib64 -lhugetlbfs(pass 2) -O3 -OPT:alias=restrict
 -LNO:prefetch=1 -LNO:ignore_feedback=off -CG:p2align=on

456.hmmr: -Mvect=cachesize:6291456 -fastsse -Mvect=partial
 -Munroll=n:8 -Msmartalloc=huge -Msafeptr -Mprefetch=t0
 -Mfprelaxed -Mipa=const -Mipa=ptr -Mipa=arg -Mipa=inline
 -tp barcelona-64 -Bstatic_pgi

458.sjeng: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2)
 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
 -L/usr/lib64 -lhugetlbfs(pass 2) -O3 -ipa
 -LNO:ignore_feedback=off -LNO:full_unroll=10 -LNO:fusion=0
 -LNO:fission=2 -IPA:pu_reorder=2 -CG:ptr_load_use=0
 -OPT:unroll_times_max=8 -INLINE:aggressive=on

462.libquantum: -Mvect=cachesize:6291456 -fastsse -Munroll=m:8
 -Msmartalloc=huge -Mprefetch=distance:4 -Mfprelaxed
 -Mipa=fast -Mipa=inline -Mipa=noarg -tp barcelona-64
 -Bstatic_pgi

464.h264ref: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2)
 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
 -L/usr/lib64 -lhugetlbfs(pass 2) -O3 -IPA:plimit=20000
 -OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0
 -CG:push_pop_int_saved_regs=off -CG:prefer_lru_reg=off

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
 -Mipa=inline:6(pass 2) -Mvect=cachesize:6291456 -fastsse
 -O4 -Msmartalloc=huge -Msafeptr=global -Mfprelaxed
 --zc_eh -tp barcelona-32 -Bstatic_pgi

483.xalancbmk: -march=barcelona -Ofast -INLINE:aggressive=on -m32
 -L/root/work/libraries/SmartHeap_8.1/lib -lsmarheap

Peak Other Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 22.7

PowerEdge M905 (AMD Opteron 8393 SE, 3.10 GHz)

SPECint_base2006 = 18.8

CPU2006 license: 55

Test date: Apr-2009

Test sponsor: Dell Inc.

Hardware Availability: May-2009

Tested by: Dell Inc.

Software Availability: Oct-2008

Peak Other Flags (Continued)

456.hmmer: -Mipa=jobs:4

462.libquantum: -Mipa=jobs:4

C++ benchmarks (except as noted below):
-Mipa=jobs:4(pass 2)

483.xalancbmk: No flags used

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/pgi72_linux_flags.20090710.html

<http://www.spec.org/cpu2006/flags/pathscale32-flags.html>

<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2006/flags/pgi72_linux_flags.20090710.xml

<http://www.spec.org/cpu2006/flags/pathscale32-flags.xml>

<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 00:16:49 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 May 2009.