



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

SPECfp®2006 = 32.7

### IBM System x3550 M2 (Intel Xeon E5530)

SPECfp\_base2006 = 30.7

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jun-2009

Hardware Availability: Apr-2009

Software Availability: Feb-2009

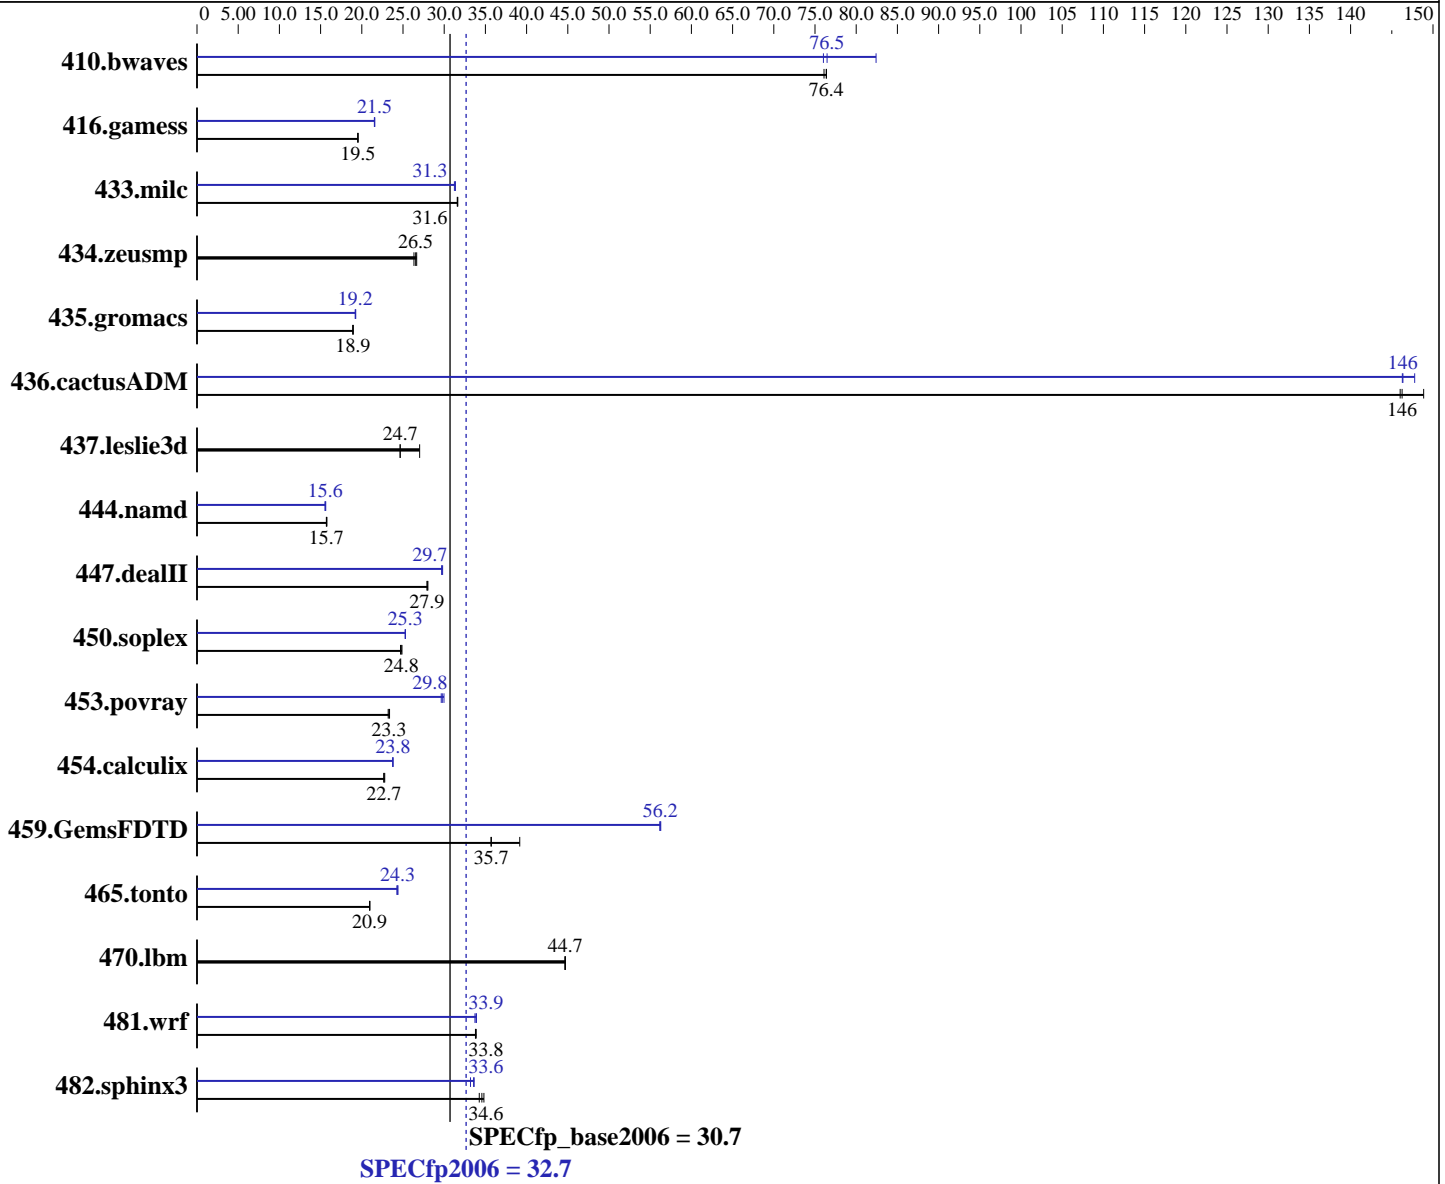

Hardware	
CPU Name:	Intel Xeon E5530
CPU Characteristics:	Intel Turbo Boost Technology up to 2.66 GHz
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software	
Operating System:	SuSE Linux Enterprise Server 10 (x86_64) SP2 with patch Linux kernel 20090119, Kernel 2.6.16.60-0.34-smp
Compiler:	Intel C++ and Fortran Compiler 11.0 for Linux Build 20090131 Package ID: l_cproc_p_11.0.080, l_cprof_p_11.0.080
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

SPECfp2006 = **32.7**

## IBM System x3550 M2 (Intel Xeon E5530)

SPECfp\_base2006 = **30.7**

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jun-2009

Hardware Availability: Apr-2009

Software Availability: Feb-2009

L3 Cache: 8 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 24 GB (12 x 2 GB PC3-10600R, 2 Rank, running at 1066 MHz)  
 Disk Subsystem: 1 x 73 GB SAS, 15000 RPM  
 Other Hardware: None

Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Binutils 2.18.50.0.7.20080502

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	178	76.4	<b>178</b>	<b>76.4</b>	179	76.1	165	82.4	<b>178</b>	<b>76.5</b>	179	76.0
416.gamess	<b>1003</b>	<b>19.5</b>	1004	19.5	1001	19.6	910	21.5	<b>909</b>	<b>21.5</b>	907	21.6
433.milc	290	31.7	<b>290</b>	<b>31.6</b>	291	31.6	293	31.4	<b>293</b>	<b>31.3</b>	294	31.2
434.zeusmp	341	26.7	346	26.3	<b>343</b>	<b>26.5</b>	341	26.7	346	26.3	<b>343</b>	<b>26.5</b>
435.gromacs	378	18.9	<b>377</b>	<b>18.9</b>	377	19.0	372	19.2	<b>371</b>	<b>19.2</b>	371	19.3
436.cactusADM	<b>81.7</b>	<b>146</b>	80.3	149	81.8	146	<b>81.7</b>	<b>146</b>	80.9	148	81.7	146
437.leslie3d	348	27.0	<b>381</b>	<b>24.7</b>	381	24.6	348	27.0	<b>381</b>	<b>24.7</b>	381	24.6
444.namd	509	15.8	<b>511</b>	<b>15.7</b>	511	15.7	516	15.6	<b>516</b>	<b>15.6</b>	513	15.6
447.dealII	<b>410</b>	<b>27.9</b>	410	27.9	408	28.0	<b>385</b>	<b>29.7</b>	384	29.8	385	29.7
450.soplex	<b>336</b>	<b>24.8</b>	338	24.7	335	24.9	330	25.3	<b>330</b>	<b>25.3</b>	330	25.3
453.povray	228	23.4	229	23.2	<b>228</b>	<b>23.3</b>	179	29.6	177	30.0	<b>179</b>	<b>29.8</b>
454.calculix	362	22.8	364	22.7	<b>363</b>	<b>22.7</b>	347	23.8	<b>347</b>	<b>23.8</b>	347	23.8
459.GemsFDTD	271	39.2	<b>297</b>	<b>35.7</b>	297	35.7	189	56.2	189	56.3	<b>189</b>	<b>56.2</b>
465.tonto	469	21.0	470	20.9	<b>470</b>	<b>20.9</b>	<b>404</b>	<b>24.3</b>	406	24.3	403	24.4
470.lbm	<b>308</b>	<b>44.7</b>	307	44.7	308	44.7	<b>308</b>	<b>44.7</b>	307	44.7	308	44.7
481.wrf	330	33.9	<b>330</b>	<b>33.8</b>	331	33.8	329	33.9	<b>330</b>	<b>33.9</b>	331	33.7
482.sphinx3	<b>564</b>	<b>34.6</b>	569	34.3	560	34.8	<b>579</b>	<b>33.6</b>	<b>581</b>	<b>33.6</b>	587	33.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

```
'ulimit -s unlimited' was used to set the stack size to unlimited prior to run
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter
KMP_STACKSIZE set to 200M
Processor CPU C-States Enabled
```

## Base Compiler Invocation

C benchmarks:  
icc

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 32.7

IBM System x3550 M2 (Intel Xeon E5530)

SPECfp\_base2006 = 30.7

CPU2006 license: 11

Test date: Jun-2009

Test sponsor: IBM Corporation

Hardware Availability: Apr-2009

Tested by: IBM Corporation

Software Availability: Feb-2009

## Base Compiler Invocation (Continued)

C++ benchmarks:  
icpc

Fortran benchmarks:  
ifort

Benchmarks using both Fortran and C:  
icc ifort

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 32.7

IBM System x3550 M2 (Intel Xeon E5530)

SPECfp\_base2006 = 30.7

CPU2006 license: 11

Test date: Jun-2009

Test sponsor: IBM Corporation

Hardware Availability: Apr-2009

Tested by: IBM Corporation

Software Availability: Feb-2009

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc

450.soplex: icpc -m32

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
 -fno-alias

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 32.7

IBM System x3550 M2 (Intel Xeon E5530)

SPECfp\_base2006 = 30.7

CPU2006 license: 11

Test date: Jun-2009

Test sponsor: IBM Corporation

Hardware Availability: Apr-2009

Tested by: IBM Corporation

Software Availability: Feb-2009

## Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealIII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias -scalar-rep- -opt-prefetch

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch  
-parallel

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -opt-prefetch -parallel

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -opt-prefetch -parallel -auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 32.7

IBM System x3550 M2 (Intel Xeon E5530)

SPECfp\_base2006 = 30.7

CPU2006 license: 11

Test date: Jun-2009

Test sponsor: IBM Corporation

Hardware Availability: Apr-2009

Tested by: IBM Corporation

Software Availability: Feb-2009

## Peak Optimization Flags (Continued)

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch  
-parallel -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 02:26:41 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 7 July 2009.