



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp[®]_rate2006 = 70.7

PowerEdge R710 (Intel Xeon E5502, 1.86 GHz)

SPECfp_rate_base2006 = 68.0

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Jul-2009

Hardware Availability: Mar-2009

Software Availability: Feb-2009

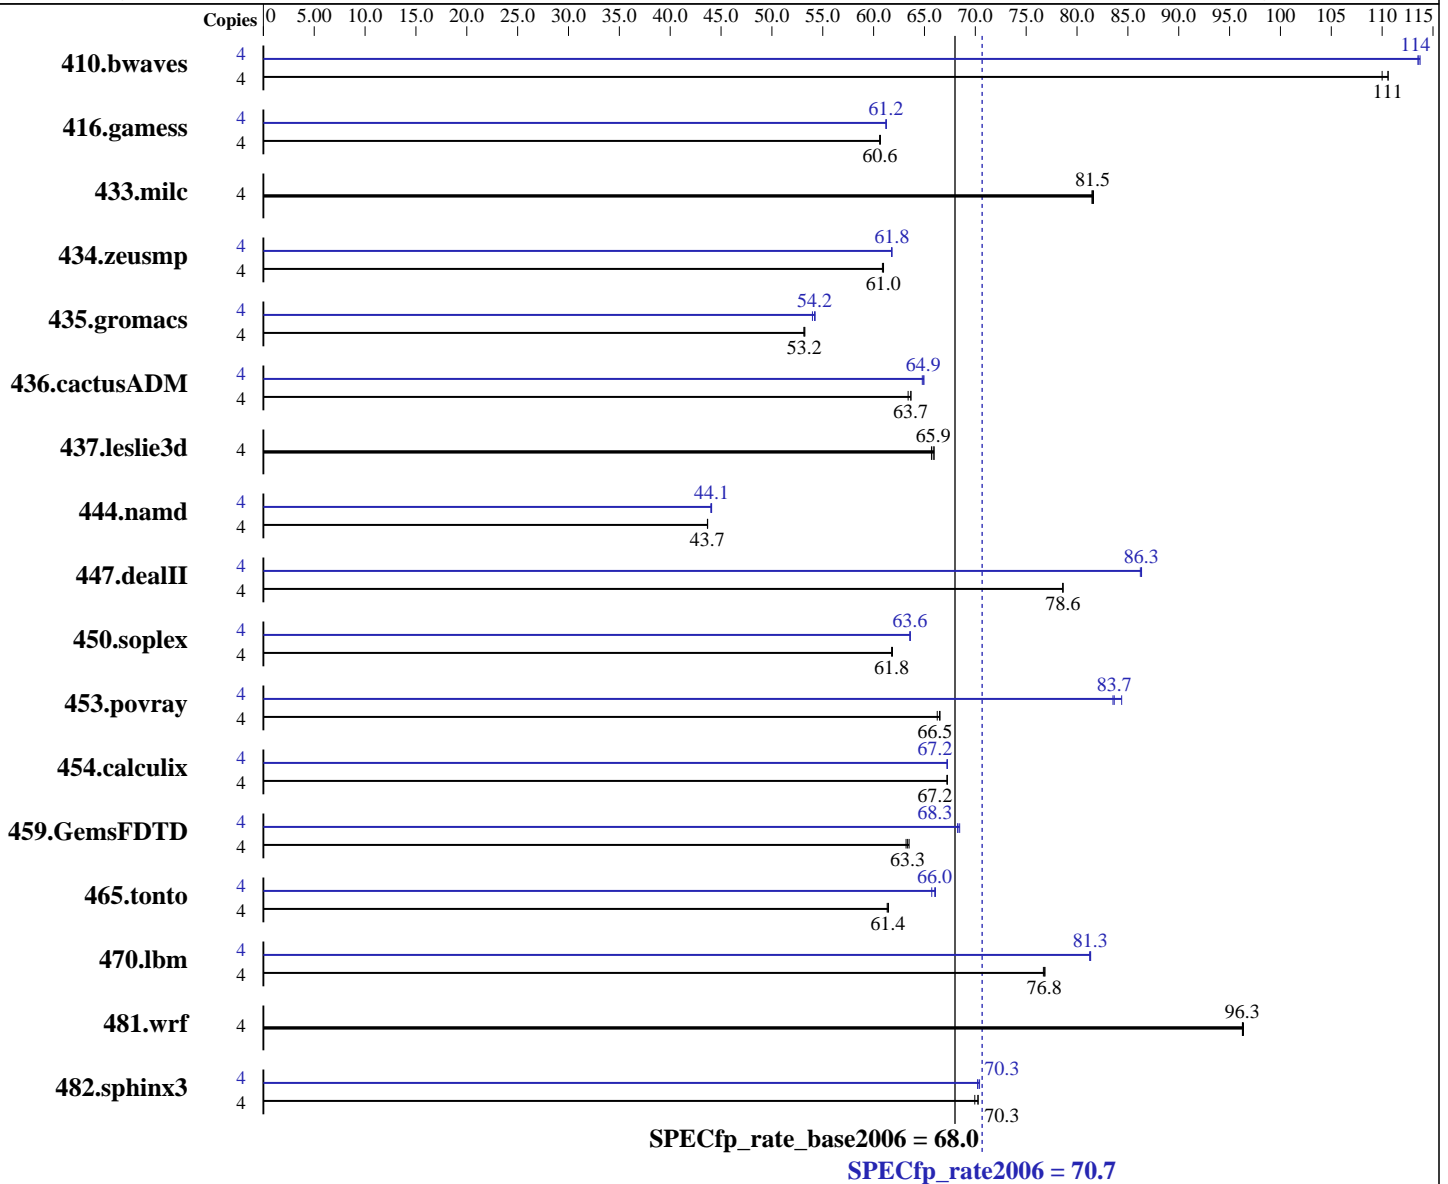

Hardware

CPU Name: Intel Xeon E5502
 CPU Characteristics:
 CPU MHz: 1867
 FPU: Integrated
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
 Compiler: Intel C++ and Fortran Compiler Professional 11.0 for Linux Build 20090131 Package ID: l_cproc_p_11.0.080, l_cprof_p_11.0.080
 Auto Parallel: No
 File System: ReiserFS
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 70.7

PowerEdge R710 (Intel Xeon E5502, 1.86 GHz)

SPECfp_rate_base2006 = 68.0

CPU2006 license: 55

Test date: Jul-2009

Test sponsor: Dell Inc.

Hardware Availability: Mar-2009

Tested by: Dell Inc.

Software Availability: Feb-2009

L3 Cache: 4 MB I+D on chip per chip
Other Cache: None
Memory: 48 GB (12 x 4 GB DDR3-1333 DR RDIMM downclocked to 800 MHz)
Disk Subsystem: 1 x 146 GB 15000 RPM SAS
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	4	492	111	492	111	494	110	4	479	114	478	114	479	114		
416.gamess	4	1292	60.6	1292	60.6	1291	60.7	4	1279	61.3	1279	61.2	1279	61.2		
433.milc	4	450	81.6	451	81.5	450	81.5	4	450	81.6	451	81.5	450	81.5		
434.zeusmp	4	598	60.9	597	61.0	597	61.0	4	589	61.8	589	61.8	589	61.8		
435.gromacs	4	536	53.2	537	53.2	537	53.2	4	526	54.3	527	54.2	529	54.0		
436.cactusADM	4	751	63.7	754	63.4	751	63.7	4	738	64.8	736	65.0	737	64.9		
437.leslie3d	4	571	65.9	570	66.0	572	65.7	4	571	65.9	570	66.0	572	65.7		
444.namd	4	734	43.7	735	43.7	735	43.7	4	729	44.0	728	44.1	728	44.1		
447.dealII	4	582	78.6	582	78.6	582	78.6	4	530	86.3	530	86.3	531	86.2		
450.soplex	4	539	61.9	540	61.8	540	61.8	4	525	63.6	525	63.6	525	63.6		
453.povray	4	320	66.5	320	66.5	321	66.3	4	252	84.4	255	83.5	254	83.7		
454.calculix	4	491	67.3	491	67.2	491	67.2	4	491	67.2	491	67.2	491	67.2		
459.GemsFDTD	4	672	63.2	670	63.3	668	63.5	4	622	68.3	622	68.3	620	68.5		
465.tonto	4	640	61.5	641	61.4	642	61.3	4	596	66.1	596	66.0	599	65.7		
470.lbm	4	715	76.9	716	76.8	717	76.7	4	677	81.2	676	81.3	676	81.3		
481.wrf	4	464	96.3	464	96.3	464	96.4	4	464	96.3	464	96.3	464	96.4		
482.sphinx3	4	1109	70.3	1115	69.9	1110	70.3	4	1110	70.3	1107	70.4	1110	70.2		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Base Compiler Invocation

C benchmarks:
icc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 70.7

PowerEdge R710 (Intel Xeon E5502, 1.86 GHz)

SPECfp_rate_base2006 = 68.0

CPU2006 license: 55

Test date: Jul-2009

Test sponsor: Dell Inc.

Hardware Availability: Mar-2009

Tested by: Dell Inc.

Software Availability: Feb-2009

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:
-xSSE4.2 -ipo -O3 -no-prec-div -static



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 70.7

PowerEdge R710 (Intel Xeon E5502, 1.86 GHz)

SPECfp_rate_base2006 = 68.0

CPU2006 license: 55

Test date: Jul-2009

Test sponsor: Dell Inc.

Hardware Availability: Mar-2009

Tested by: Dell Inc.

Software Availability: Feb-2009

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc

450.soplex: icpc -m32

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
-auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 70.7

PowerEdge R710 (Intel Xeon E5502, 1.86 GHz)

SPECfp_rate_base2006 = 68.0

CPU2006 license: 55

Test date: Jul-2009

Test sponsor: Dell Inc.

Hardware Availability: Mar-2009

Tested by: Dell Inc.

Software Availability: Feb-2009

Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealIII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -opt-prefetch

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -opt-prefetch -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 70.7

PowerEdge R710 (Intel Xeon E5502, 1.86 GHz)

SPECfp_rate_base2006 = 68.0

CPU2006 license: 55

Test date: Jul-2009

Test sponsor: Dell Inc.

Hardware Availability: Mar-2009

Tested by: Dell Inc.

Software Availability: Feb-2009

Peak Optimization Flags (Continued)

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090710.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090710.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 02:32:42 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 21 July 2009.