



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp[®]_rate2006 = 322

PowerEdge R715 (AMD Opteron 6176 SE, 2.30 GHz)

SPECfp_rate_base2006 = 295

CPU2006 license: 55


Test date: Jun-2010

Test sponsor: Dell Inc.

Hardware Availability: May-2010

Tested by: Dell Inc.

Software Availability: Feb-2010

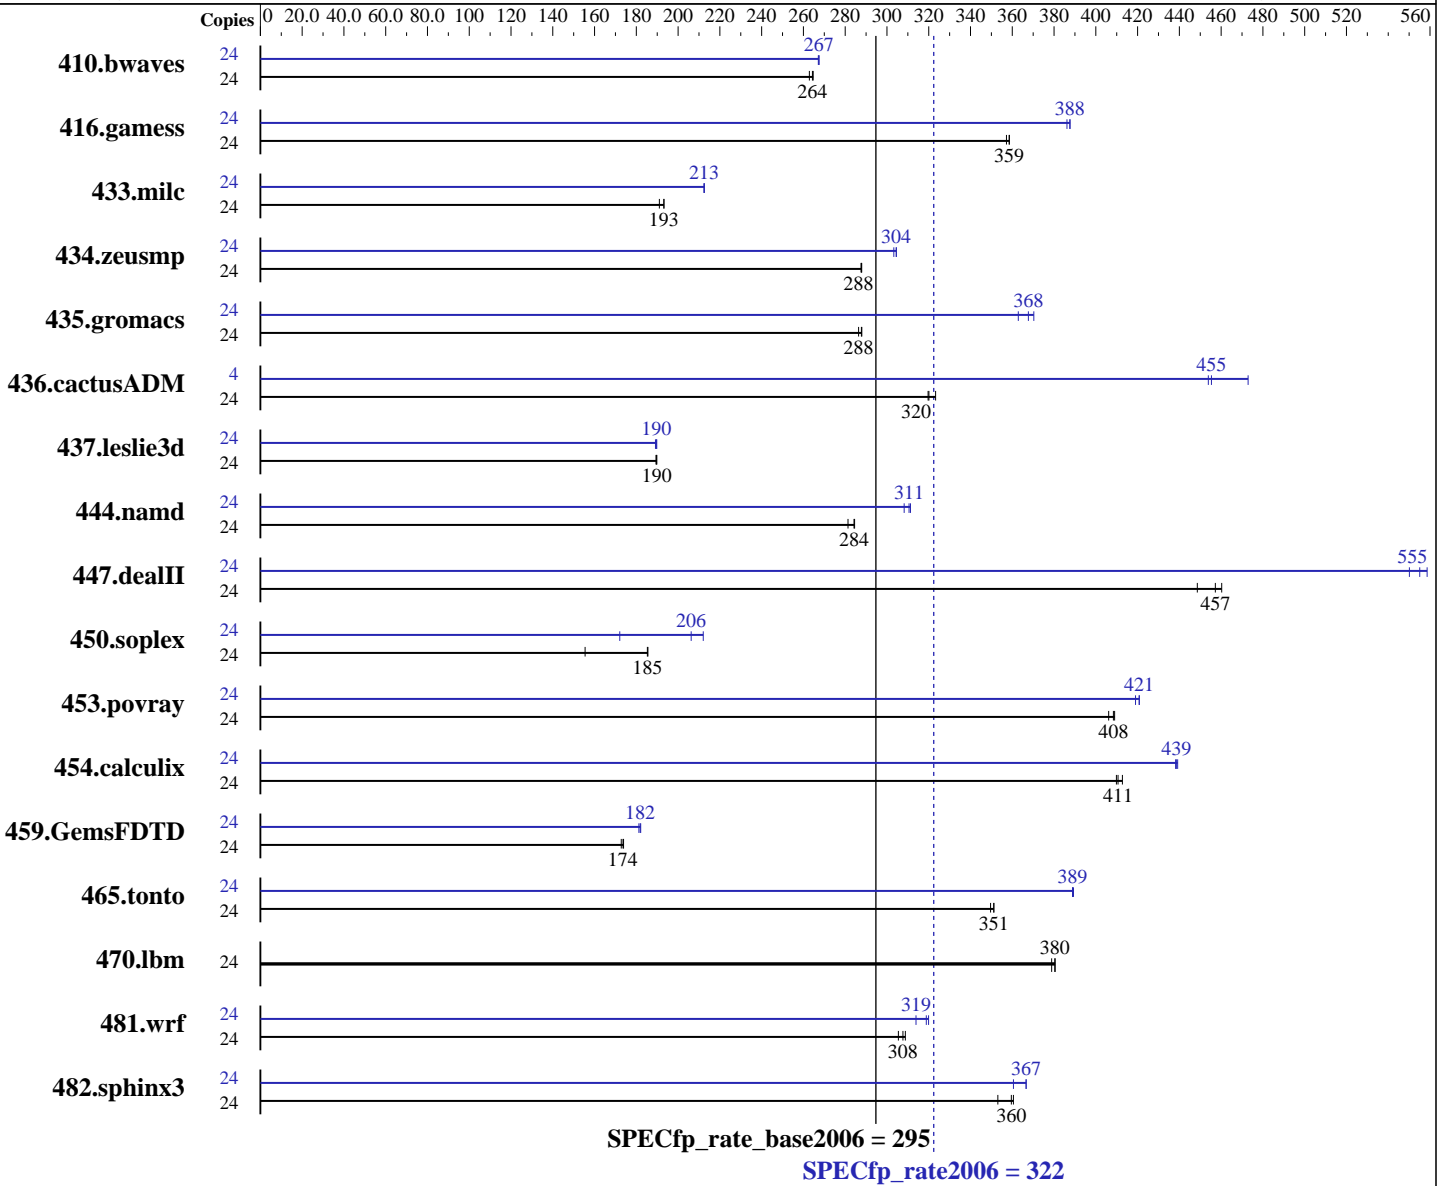

Hardware

CPU Name: AMD Opteron 6176 SE
 CPU Characteristics:
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip
 CPU(s) orderable: 2,4 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-smp
 Compiler: x86 Open64 4.2.3 Compiler Suite (from AMD)
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 322

PowerEdge R715 (AMD Opteron 6176 SE, 2.30 GHz)

SPECfp_rate_base2006 = 295

CPU2006 license: 55

Test date: Jun-2010

Test sponsor: Dell Inc.

Hardware Availability: May-2010

Tested by: Dell Inc.

Software Availability: Feb-2010

L3 Cache: 12 MB I+D on chip per chip, 6 MB shared / 6 cores
 Other Cache: None
 Memory: 64 GB (16 x 4 GB DDR3-1333 DR RDIMM, CL9, ECC)
 Disk Subsystem: 1 x 148 GB 10000 RPM SAS
 Other Hardware: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	1241	263	1232	265	<u>1234</u>	<u>264</u>	24	1221	267	<u>1220</u>	<u>267</u>	1220	267
416.gamess	24	1310	359	1315	357	<u>1311</u>	<u>359</u>	24	<u>1213</u>	<u>388</u>	1212	388	1217	386
433.milc	24	1140	193	<u>1140</u>	<u>193</u>	1153	191	24	1037	212	<u>1037</u>	<u>213</u>	1037	213
434.zeusmp	24	759	288	<u>759</u>	<u>288</u>	759	288	24	720	303	<u>717</u>	<u>304</u>	717	305
435.gromacs	24	598	286	<u>596</u>	<u>288</u>	595	288	24	472	363	463	370	<u>466</u>	<u>368</u>
436.cactusADM	24	897	320	<u>896</u>	<u>320</u>	887	323	4	105	454	101	473	<u>105</u>	<u>455</u>
437.leslie3d	24	1191	189	<u>1189</u>	<u>190</u>	1189	190	24	1193	189	<u>1190</u>	<u>190</u>	1189	190
444.namd	24	684	281	677	285	<u>677</u>	<u>284</u>	24	624	308	<u>620</u>	<u>311</u>	618	311
447.dealII	24	612	449	<u>600</u>	<u>457</u>	597	460	24	491	559	499	550	<u>495</u>	<u>555</u>
450.soplex	24	1287	155	<u>1080</u>	<u>185</u>	1079	186	24	1163	172	<u>970</u>	<u>206</u>	944	212
453.povray	24	314	406	<u>313</u>	<u>408</u>	312	409	24	305	419	303	421	<u>303</u>	<u>421</u>
454.calculix	24	480	413	<u>482</u>	<u>411</u>	483	410	24	452	438	<u>451</u>	<u>439</u>	451	439
459.GemsFDTD	24	1474	173	1464	174	<u>1467</u>	<u>174</u>	24	<u>1400</u>	<u>182</u>	1398	182	1405	181
465.tonto	24	672	351	676	350	<u>673</u>	<u>351</u>	24	607	389	<u>607</u>	<u>389</u>	607	389
470.lbm	24	867	381	<u>867</u>	<u>380</u>	870	379	24	867	381	<u>867</u>	<u>380</u>	870	379
481.wrf	24	878	305	<u>871</u>	<u>308</u>	868	309	24	854	314	838	320	<u>841</u>	<u>319</u>
482.sphinx3	24	1325	353	1297	361	<u>1301</u>	<u>360</u>	24	1297	361	1276	367	<u>1276</u>	<u>367</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
 'numactl' was used to bind copies to the cores.
 See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=10800 in /etc/sysctl.conf
 mount -t hugetlbfs nodev /mnt/hugepages



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 322

PowerEdge R715 (AMD Opteron 6176 SE, 2.30 GHz)

SPECfp_rate_base2006 = 295

CPU2006 license: 55

Test date: Jun-2010

Test sponsor: Dell Inc.

Hardware Availability: May-2010

Tested by: Dell Inc.

Software Availability: Feb-2010

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_LIMIT = "450"

LD_LIBRARY_PATH = "/cpu2006/amd1002mc-rate-revA-libs/64:/cpu2006/amd1002mc-rate-revA-libs/32"

OMP_NUM_THREADS = "6"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Binaries were compiled on SLES10 SP2 with binutils 2.18

Base Compiler Invocation

C benchmarks:

opencc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

opencc openf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64
 436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
 -fno-second-underscore
 482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 322

PowerEdge R715 (AMD Opteron 6176 SE, 2.30 GHz)

SPECfp_rate_base2006 = 295

CPU2006 license: 55

Test date: Jun-2010

Test sponsor: Dell Inc.

Hardware Availability: May-2010

Tested by: Dell Inc.

Software Availability: Feb-2010

Base Optimization Flags

C benchmarks:

-march=barcelona -mso -Ofast -OPT:malloc_alg=1 -HP:bdt=2m

C++ benchmarks:

-march=barcelona -mso -Ofast -static -INLINE:aggressive=on
-OPT:malloc_alg=1 -HP:bdt=2m

Fortran benchmarks:

-march=barcelona -mso -Ofast -HP

Benchmarks using both Fortran and C:

-march=barcelona -mso -Ofast -OPT:malloc_alg=1 -HP:bdt=2m -HP

Peak Compiler Invocation

C benchmarks:

opencc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

opencc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
-fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 322

PowerEdge R715 (AMD Opteron 6176 SE, 2.30 GHz)

SPECfp_rate_base2006 = 295

CPU2006 license: 55

Test date: Jun-2010

Test sponsor: Dell Inc.

Hardware Availability: May-2010

Tested by: Dell Inc.

Software Availability: Feb-2010

Peak Optimization Flags

C benchmarks:

433.milc: -march=barcelona -mso -Ofast -CG:movnti=1
-CG:local_sched_alg=1 -CG:locs_shallow_depth=1
-HP:bdt=2m:heap=2m -LNO:prefetch=3

470.lbm: basepeak = yes

482.sphinx3: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:malloc_alg=2
-CG:sse_cse_regs=0 -CG:locs_shallow_depth=1 -CG:cmp_peep=on
-CG:local_sched_alg=1 -INLINE:aggressive=on

C++ benchmarks:

444.namd: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:ignore_feedback=off
-CG:local_sched_alg=2 -CG:load_exe=0 -CG:compute_to=on
-OPT:unroll_size=256 -fno-exceptions -HP:bdt=2m:heap=2m

447.deallI: -march=barcelona -mso -Ofast -static -INLINE:aggressive=on
-LNO:opt=0 -fno-emit-exceptions -m32
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on
-CG:cmp_peep=on -TENV:frame_pointer=off

450.soplex: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on
-OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
-OPT:fold_unsigned_relops=on -OPT:malloc_alg=1
-CG:load_exe=0 -fno-exceptions -m32 -HP:bdt=2m

453.povray: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on

Fortran benchmarks:

410.bwaves: -march=barcelona -mso -O3 -OPT:Ofast -OPT:treeheight=on
-LNO:blocking=off -LNO:prefetch_ahead=5
-LNO:ignore_feedback=off -WOPT:aggstr=0 -HP:bdt=2m:heap=2m
-CG:cmp_peep=on

416.gamess: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0
-LNO:prefetch=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256
-HP:bdt=2m:heap=2m

434.zeusmp: -march=barcelona -mso -Ofast -LNO:blocking=off
-LNO:interchange=off -OPT:treeheight=on -OPT:unroll_size=256
-CG:cmp_peep=on -GRA:prioritize_by_density=on -HP

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 322

PowerEdge R715 (AMD Opteron 6176 SE, 2.30 GHz)

SPECfp_rate_base2006 = 295

CPU2006 license: 55

Test date: Jun-2010

Test sponsor: Dell Inc.

Hardware Availability: May-2010

Tested by: Dell Inc.

Software Availability: Feb-2010

Peak Optimization Flags (Continued)

437.leslie3d: -march=barcelona -mso -Ofast -HP:bdt=2m:heap=2m

459.GemsFDTD: -march=barcelona -mso -Ofast -LNO:fission=2
-LNO:prefetch_ahead=1 -CG:load_exe=0 -CG:local_sched_alg=1
-HP

465.tonto: -march=barcelona -mso -Ofast
-OPT:alias=no_f90_pointer_alias -LNO:blocking=off
-CG:load_exe=1 -IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -mso -Ofast -OPT:rsqrt=2
-HP:bdt=2m:heap=2m

436.cactusADM: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -apo -LNO:prefetch_ahead=1
-HP:bdt=2m:heap=2m -LANG:heap_allocation_threshold=100

454.calculix: -march=barcelona -mso -Ofast -CG:load_exe=0
-CG:ptr_load_use=0 -CG:local_sched_alg=2 -CG:compute_to=on
-LNO:prefetch_ahead=30 -WOPT:unroll=2
-GRA:optimize_boundary=on -HP:bdt=2m:heap=2m

481.wrf: -march=barcelona -mso -Ofast -LNO:blocking=off
-LNO:prefetch_ahead=10 -LANG:copyinout=off
-IPA:callee_limit=5000 -GRA:prioritize_by_density=on -m3dnow
-HP

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.3-flags-revA.20100721.html>

<http://www.spec.org/cpu2006/flags/amd-platform-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.3-flags-revA.20100721.xml>

<http://www.spec.org/cpu2006/flags/amd-platform-revA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 11:29:33 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 20 July 2010.