



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp[®]2006 = 45.8

PowerEdge M710 (Intel Xeon X5670, 2.93 GHz)

SPECfp_base2006 = 42.6

CPU2006 license: 55


Test date: Jul-2010

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Dec-2009

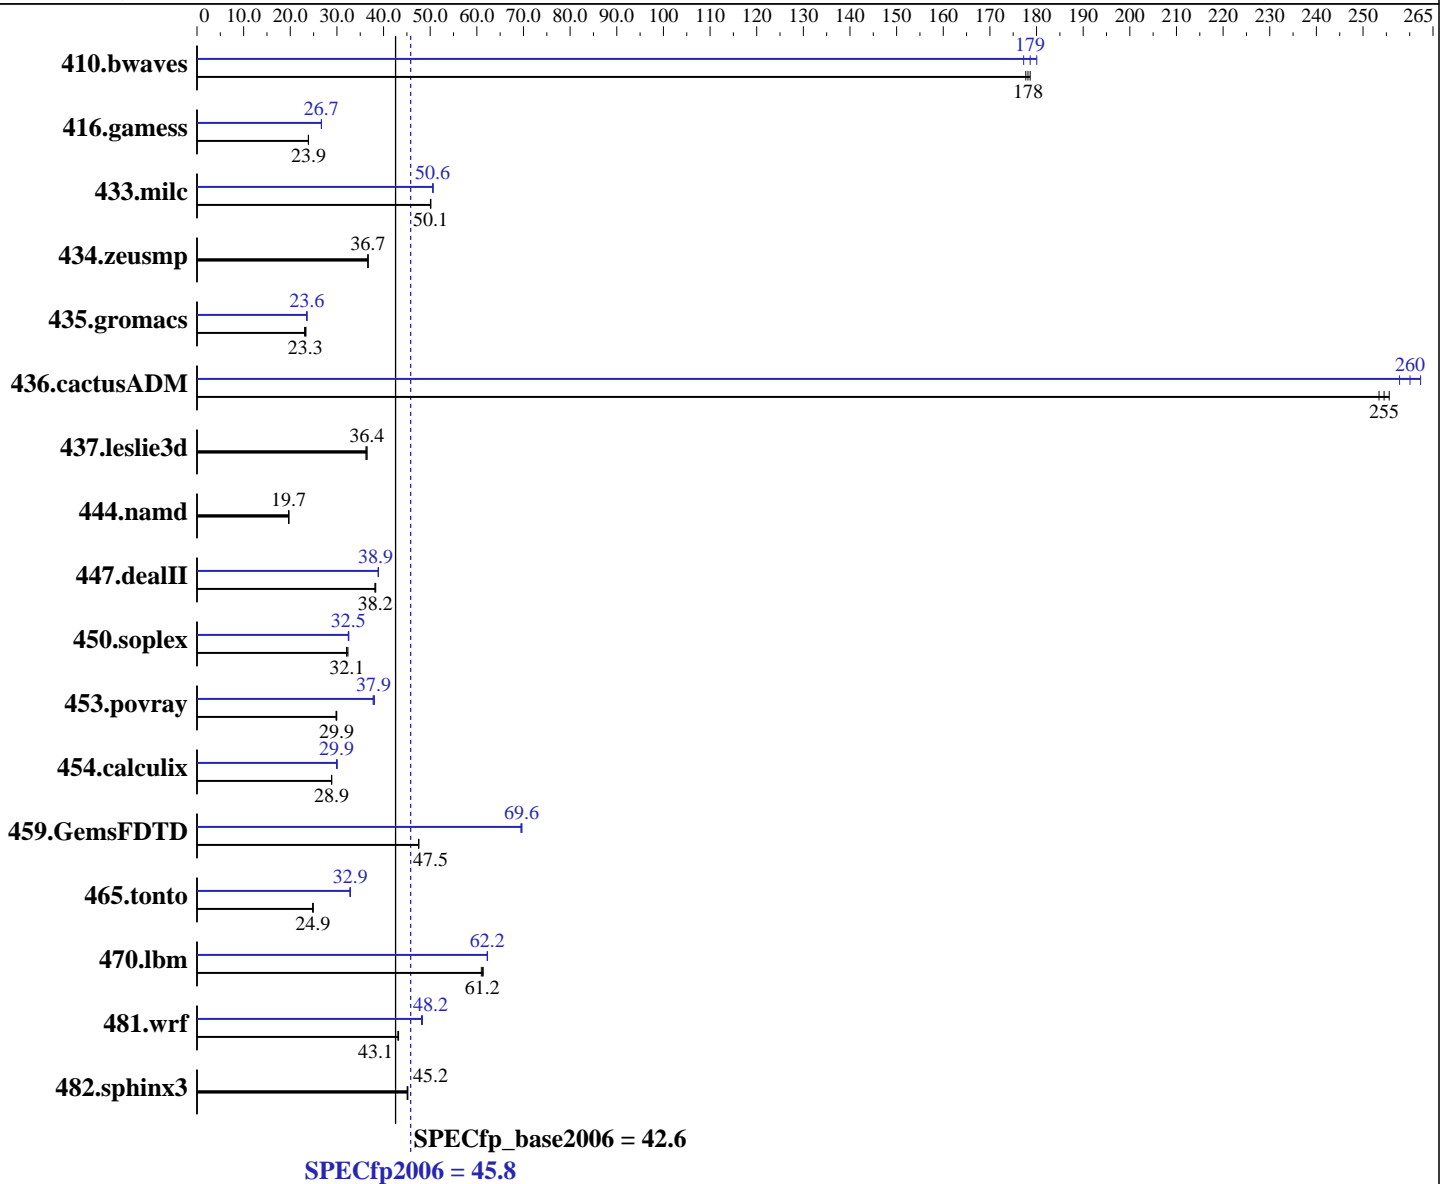

Hardware

CPU Name: Intel Xeon X5670
 CPU Characteristics: Intel Turbo Boost Technology up to 3.33 GHz
 CPU MHz: 2933
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-smp
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.064, l_cprof_p_11.1.064
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 45.8

PowerEdge M710 (Intel Xeon X5670, 2.93 GHz)

SPECfp_base2006 = 42.6

CPU2006 license: 55

Test date: Jul-2010

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Dec-2009

L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 48 GB (12 x 4 GB DDR3-1333 DR RDIMM, CL9, ECC)
Disk Subsystem: 1 x 146 GB 15000 RPM SAS
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	76.5	178	76.3	178	76.1	179	75.5	180	76.7	177	76.1	179
416.gamess	819	23.9	819	23.9	821	23.9	734	26.7	734	26.7	734	26.7
433.milc	183	50.1	183	50.1	183	50.0	182	50.6	181	50.6	182	50.5
434.zeusmp	248	36.6	248	36.7	248	36.7	248	36.6	248	36.7	248	36.7
435.gromacs	310	23.1	307	23.3	306	23.4	302	23.6	304	23.5	303	23.6
436.cactusADM	47.2	253	46.8	256	47.0	255	45.9	260	45.6	262	46.3	258
437.leslie3d	258	36.4	260	36.2	258	36.4	258	36.4	260	36.2	258	36.4
444.namd	408	19.7	408	19.7	408	19.7	408	19.7	408	19.7	408	19.7
447.dealII	300	38.2	298	38.3	299	38.2	294	38.9	294	38.9	294	38.9
450.soplex	260	32.1	258	32.4	260	32.1	257	32.5	257	32.4	256	32.6
453.povray	178	29.8	178	29.9	178	29.9	141	37.8	140	38.0	140	37.9
454.calculix	286	28.9	286	28.8	286	28.9	276	29.9	274	30.1	276	29.9
459.GemsFDTD	223	47.5	223	47.5	223	47.5	152	69.6	152	69.6	153	69.5
465.tonto	395	24.9	396	24.9	397	24.8	299	32.9	300	32.8	299	32.9
470.lbm	224	61.4	225	61.0	225	61.2	221	62.2	221	62.2	221	62.3
481.wrf	258	43.2	259	43.1	259	43.1	232	48.2	231	48.3	232	48.1
482.sphinx3	432	45.2	433	45.1	431	45.2	432	45.2	433	45.1	431	45.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Platform Notes

BIOS Settings:
Power Management = Maximum Performance (Default = Active Power Controller)
Data Reuse = Disabled (Default = Enabled)

General Notes

Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 45.8

PowerEdge M710 (Intel Xeon X5670, 2.93 GHz)

SPECfp_base2006 = 42.6

CPU2006 license: 55

Test date: Jul-2010

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Dec-2009

General Notes (Continued)

KMP_STACKSIZE set to 200M

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 45.8

PowerEdge M710 (Intel Xeon X5670, 2.93 GHz)

SPECfp_base2006 = 42.6

CPU2006 license: 55

Test date: Jul-2010

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Dec-2009

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-ansi-alias`

470.lbm: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-parallel -ansi-alias -auto-ilp32`

482.sphinx3: `basepeak = yes`

C++ benchmarks:

444.namd: `basepeak = yes`

447.dealIII: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias -scalar-rep- -auto-ilp32`

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 45.8

PowerEdge M710 (Intel Xeon X5670, 2.93 GHz)

SPECfp_base2006 = 42.6

CPU2006 license: 55

Test date: Jul-2010

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Dec-2009

Peak Optimization Flags (Continued)

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3 -auto-ilp32

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
-parallel

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -opt-prefetch -parallel

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -opt-prefetch -parallel -auto-ilp32

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: Same as 454.calculix

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 45.8

PowerEdge M710 (Intel Xeon X5670, 2.93 GHz)

SPECfp_base2006 = 42.6

CPU2006 license: 55

Test date: Jul-2010

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Dec-2009

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 10:57:07 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 August 2010.