



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint[®]_rate2006 = 122

PRIMERGY BX924 S2, Intel Xeon E5640, 2.67 GHz

SPECint_rate_base2006 = 116

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Aug-2010

Hardware Availability: Jun-2010

Software Availability: Jan-2010

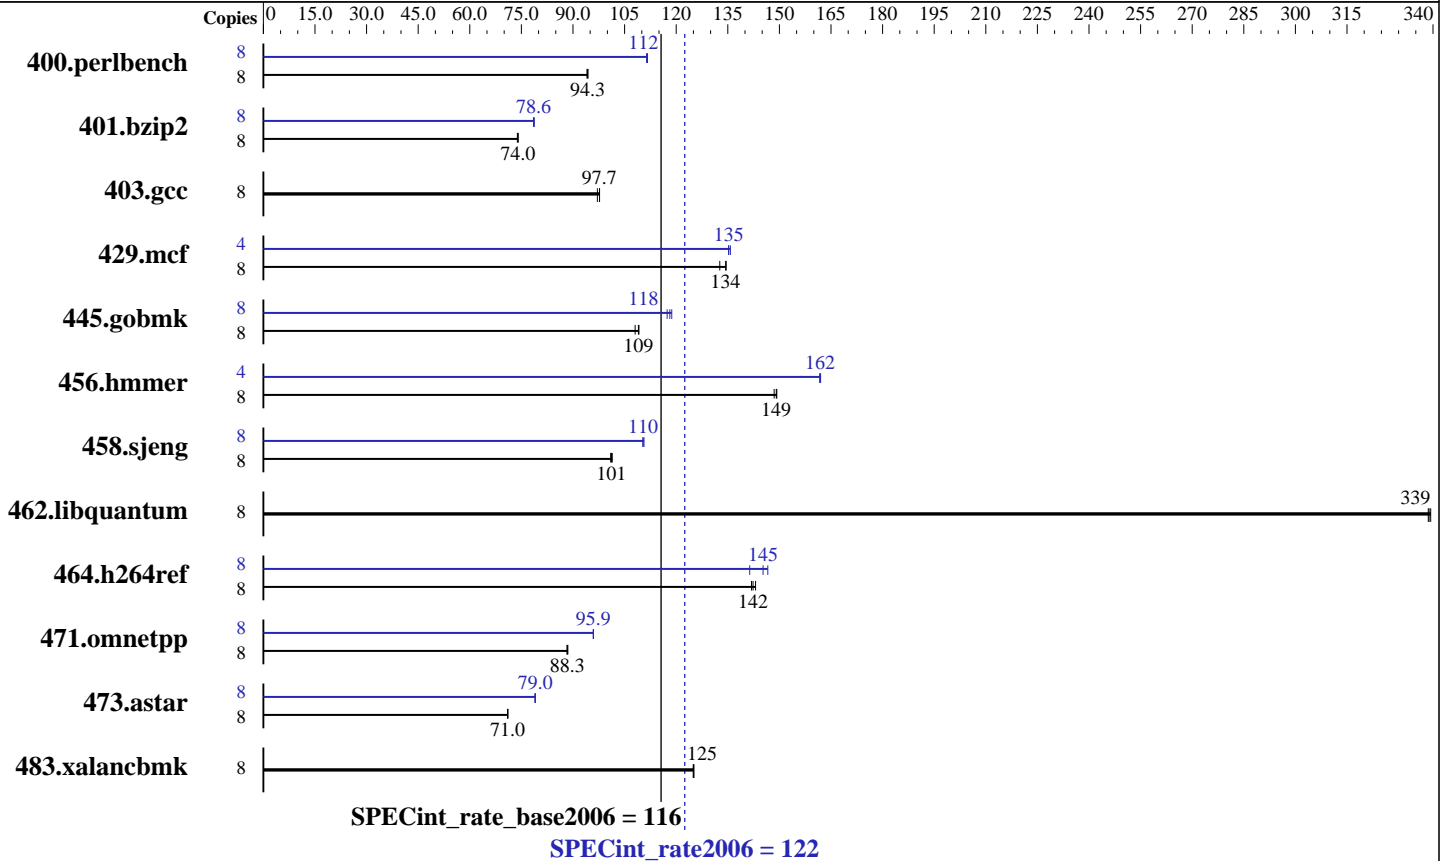

Hardware

CPU Name: Intel Xeon E5640
 CPU Characteristics: Intel Turbo Boost Technology up to 2.93 GHz
 CPU MHz: 2667
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 12 MB I+D on chip per chip
 Other Cache: None
 Memory: 24 GB (6x4 GB PC3-10600R, 2 rank, CL9-9-9, ECC, see add'l detail in notes)
 Disk Subsystem: 1 x SATA, 160 GB, 5400 RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-default
 Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.064
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint_rate2006 = 122

PRIMERGY BX924 S2, Intel Xeon E5640, 2.67 GHz

SPECint_rate_base2006 = 116

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Aug-2010
Hardware Availability: Jun-2010
Software Availability: Jan-2010

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	831	94.1	829	94.3	<u>829</u>	<u>94.3</u>	8	700	112	<u>701</u>	<u>112</u>	702	111
401.bzip2	8	1046	73.8	1042	74.1	<u>1043</u>	<u>74.0</u>	8	983	78.5	980	78.7	<u>982</u>	<u>78.6</u>
403.gcc	8	663	97.1	659	97.7	<u>659</u>	<u>97.7</u>	8	663	97.1	659	97.7	<u>659</u>	<u>97.7</u>
429.mcf	8	542	135	550	133	<u>543</u>	<u>134</u>	4	269	136	270	135	<u>270</u>	<u>135</u>
445.gobmk	8	<u>770</u>	<u>109</u>	777	108	769	109	8	715	117	707	119	<u>710</u>	<u>118</u>
456.hammer	8	500	149	503	148	<u>501</u>	<u>149</u>	4	<u>231</u>	<u>162</u>	230	162	231	162
458.sjeng	8	959	101	<u>957</u>	<u>101</u>	954	101	8	<u>877</u>	<u>110</u>	878	110	875	111
462.libquantum	8	490	339	<u>489</u>	<u>339</u>	488	339	8	490	339	<u>489</u>	<u>339</u>	488	339
464.h264ref	8	<u>1244</u>	<u>142</u>	1237	143	1248	142	8	1252	141	1207	147	<u>1219</u>	<u>145</u>
471.omnetpp	8	565	88.5	566	88.3	<u>566</u>	<u>88.3</u>	8	521	96.0	<u>521</u>	<u>95.9</u>	521	95.9
473.astar	8	<u>791</u>	<u>71.0</u>	791	71.0	790	71.1	8	<u>711</u>	<u>79.0</u>	711	79.0	711	79.0
483.xalancbmk	8	442	125	<u>441</u>	<u>125</u>	441	125	8	442	125	<u>441</u>	<u>125</u>	441	125

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Platform Notes

The system automatically configures the memory to run at 1067 MHz.
BIOS configuration:
Data Reuse Optimization = Disable
Performance/Power Setting = Traditional

General Notes

For information about Fujitsu please visit: <http://www.fujitsu.com>
Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502

Base Compiler Invocation

C benchmarks:
icc -m32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint_rate2006 = 122

PRIMERGY BX924 S2, Intel Xeon E5640, 2.67 GHz

SPECint_rate_base2006 = 116

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Aug-2010
Hardware Availability: Jun-2010
Software Availability: Jan-2010

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.icl1.1/libicl1.1-32bit -lsmarheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks (except as noted below):
icpc -m32

473.astar: icpc -m64



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint_rate2006 = 122

PRIMERGY BX924 S2, Intel Xeon E5640, 2.67 GHz

SPECint_rate_base2006 = 116

CPU2006 license: 19

Test date: Aug-2010

Test sponsor: Fujitsu

Hardware Availability: Jun-2010

Tested by: Fujitsu

Software Availability: Jan-2010

Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
               -prof-use(pass 2) -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
            -prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: basepeak = yes

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
            -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
            -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
            -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
              -prof-use(pass 2) -unroll2 -ansi-alias

```

C++ benchmarks:

```

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
              -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint_rate2006 = 122

PRIMERGY BX924 S2, Intel Xeon E5640, 2.67 GHz

SPECint_rate_base2006 = 116

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Aug-2010

Hardware Availability: Jun-2010

Software Availability: Jan-2010

Peak Optimization Flags (Continued)

```
473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
          -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
          -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs
          -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64
```

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.02.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.02.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 10:03:04 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 14 September 2010.