



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®_rate2006 = 193

PowerEdge R415 (AMD Opteron 4170 HE, 2.10 GHz)

SPECint_rate_base2006 = 168

CPU2006 license: 55


Test date: Jul-2010

Test sponsor: Dell Inc.

Hardware Availability: Jul-2010

Tested by: Dell Inc.

Software Availability: Jul-2010

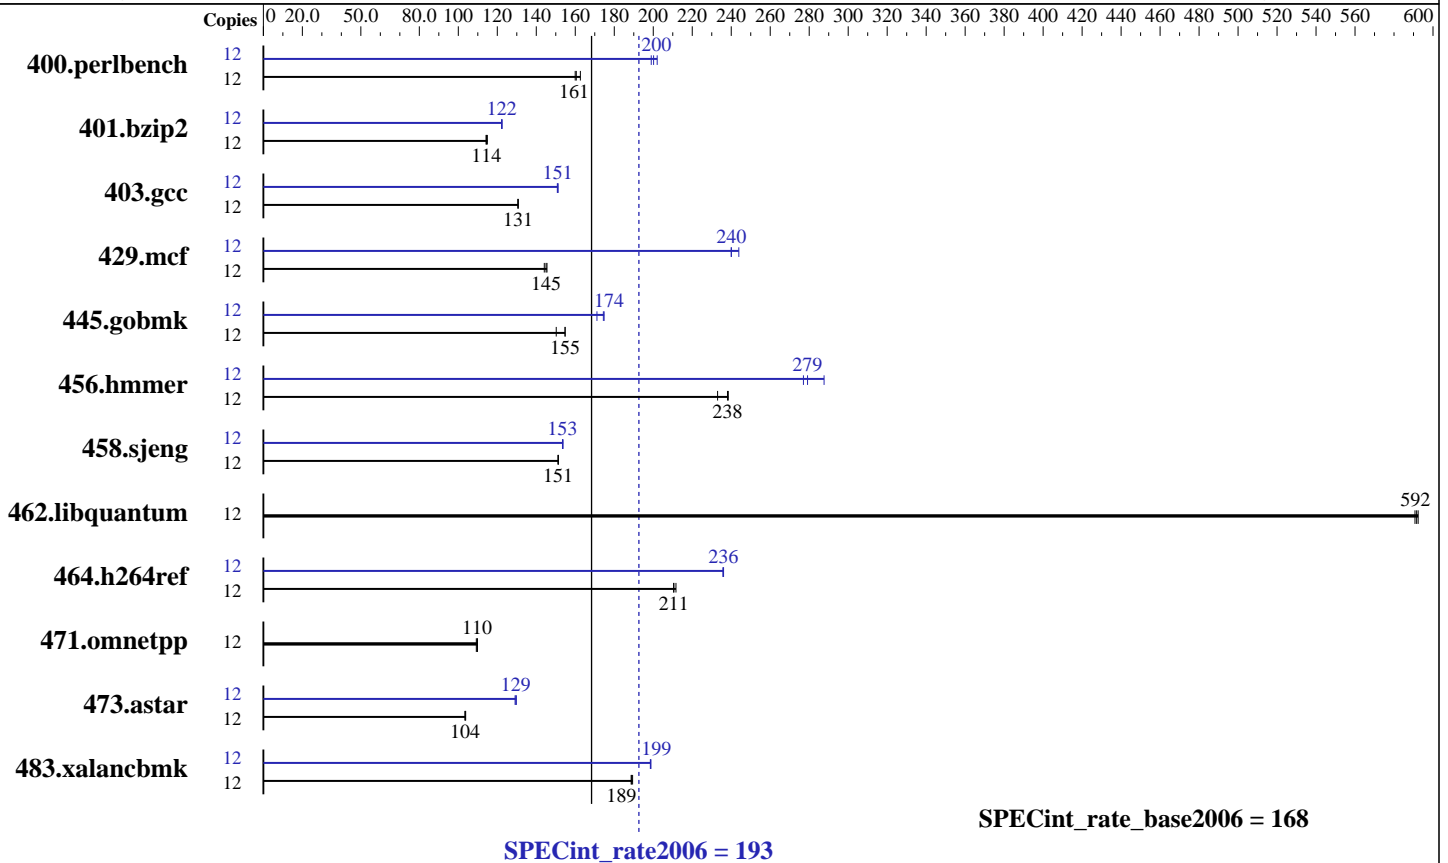

Hardware

CPU Name: AMD Opteron 4170 HE
 CPU Characteristics:
 CPU MHz: 2100
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core
 L3 Cache: 6 MB I+D on chip per chip
 Other Cache: None
 Memory: 32 GB (8 x 4 GB 2Rx4 PC3-10600R-9, ECC)
 Disk Subsystem: 1 x 146 GB 10000 RPM SAS
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64)
 Kernel 2.6.27.19-5-default
 Compiler: x86 Open64 4.2.4 Compiler Suite (from AMD)
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap 8.1 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 193

PowerEdge R415 (AMD Opteron 4170 HE, 2.10 GHz)

SPECint_rate_base2006 = 168

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jul-2010
Hardware Availability: Jul-2010
Software Availability: Jul-2010

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	12	721	163	<u>730</u>	<u>161</u>	733	160	12	589	199	<u>586</u>	<u>200</u>	580	202
401.bzip2	12	1008	115	<u>1012</u>	<u>114</u>	1014	114	12	948	122	<u>946</u>	<u>122</u>	946	122
403.gcc	12	740	131	739	131	<u>739</u>	<u>131</u>	12	<u>640</u>	<u>151</u>	639	151	641	151
429.mcf	12	759	144	<u>755</u>	<u>145</u>	752	145	12	456	240	449	244	<u>456</u>	<u>240</u>
445.gobmk	12	838	150	813	155	<u>813</u>	<u>155</u>	12	<u>722</u>	<u>174</u>	736	171	720	175
456.hammer	12	469	238	480	233	<u>470</u>	<u>238</u>	12	404	277	<u>401</u>	<u>279</u>	389	288
458.sjeng	12	<u>960</u>	<u>151</u>	961	151	960	151	12	944	154	946	153	<u>946</u>	<u>153</u>
462.libquantum	12	<u>420</u>	<u>592</u>	421	591	420	592	12	<u>420</u>	<u>592</u>	421	591	420	592
464.h264ref	12	1262	210	<u>1261</u>	<u>211</u>	1255	212	12	<u>1125</u>	<u>236</u>	1125	236	1127	236
471.omnetpp	12	683	110	687	109	<u>684</u>	<u>110</u>	12	683	110	687	109	<u>684</u>	<u>110</u>
473.astar	12	<u>813</u>	<u>104</u>	815	103	812	104	12	<u>651</u>	<u>129</u>	652	129	649	130
483.xalancbmk	12	<u>438</u>	<u>189</u>	439	189	437	189	12	416	199	417	199	<u>417</u>	<u>199</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=5400 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

General Notes

Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "450"
LD_LIBRARY_PATH = "/cpu2006/amd1002-rate-libs-revC/64:/cpu2006/amd1002-rate-libs-revC/32"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
<http://developer.amd.com/cpu/open64>

Binaries were compiled on SLES10 SP2 with binutils 2.18



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 193

PowerEdge R415 (AMD Opteron 4170 HE, 2.10 GHz)

SPECint_rate_base2006 = 168

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jul-2010
Hardware Availability: Jul-2010
Software Availability: Jul-2010

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-march=barcelona -mso -Ofast -CG:local_sched_alg=1
-INLINE:aggressive=on -IPA:plimit=8000 -IPA:small_pu=100
-HP:bdt=2m:heap=2m

C++ benchmarks:
-march=barcelona -mso -Ofast -m32 -INLINE:aggressive=on
-CG:cmp_peep=on -L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 193

PowerEdge R415 (AMD Opteron 4170 HE, 2.10 GHz)

SPECint_rate_base2006 = 168

CPU2006 license: 55

Test date: Jul-2010

Test sponsor: Dell Inc.

Hardware Availability: Jul-2010

Tested by: Dell Inc.

Software Availability: Jul-2010

Peak Portability Flags (Continued)

```

401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

400.perlbench: -march=barcelona -mso -fb_create fbdata(pass 1)
               -fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
               -OPT:unroll_times_max=8 -OPT:unroll_size=256
               -OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
               -CG:local_sched_alg=1 -CG:unroll_fb_req=on
               -HP:bdt=2m:heap=2m

401.bzip2: -march=barcelona -mso -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -O3 -OPT:alias=disjoint
            -OPT:goto=off -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m

403.gcc: -march=barcelona -mso -fb_create fbdata(pass 1)
          -fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
          -LNO:prefetch Ahead=10 -CG:cmp_peep=on -m32
          -HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200

429.mcf: -march=barcelona -mso -O3 -ipa -INLINE:aggressive=on
          -CG:gcm=off -GRA:prioritize_by_density=on -m32
          -HP:bdt=2m:heap=2m

445.gobmk: -march=barcelona -mso -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict
            -OPT:unroll_times_max=8 -OPT:unroll_size=256
            -OPT:unroll_level=2 -OPT:keep_ext=on -ipa -IPA:plimit=750
            -IPA:min_hotness=300 -IPA:pu_reorder=1 -LNO:prefetch=1
            -LNO:ignore_feedback=off -CG:p2align=on
            -CG:unroll_fb_req=on -HP:bdt=2m:heap=2m

456.hmmer: -march=barcelona -mso -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=0
            -OPT:alias=disjoint -OPT:unroll_times_max=8
            -OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
            -CG:local_sched_alg=1 -CG:cflow=0
            -CG:push_pop_int_saved_regs=off -CG:cmp_peep=on
            -HP:bdt=2m:heap=2m

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 193

PowerEdge R415 (AMD Opteron 4170 HE, 2.10 GHz)

SPECint_rate_base2006 = 168

CPU2006 license: 55

Test date: Jul-2010

Test sponsor: Dell Inc.

Hardware Availability: Jul-2010

Tested by: Dell Inc.

Software Availability: Jul-2010

Peak Optimization Flags (Continued)

```
458.sjeng: -march=barcelona -mso -fb_create fbdata(pass 1)
          -fb_opt fbdata(pass 2) -O3 -ipa -LNO:ignore_feedback=off
          -LNO:full_unroll=10 -LNO:fusion=0 -LNO:fission=2
          -IPA:pu_reorder=2 -CG:ptr_load_use=0
          -OPT:unroll_times_max=8 -INLINE:aggressive=on
```

462.libquantum: basepeak = yes

```
464.h264ref: -march=barcelona -mso -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -O3 -IPA:plimit=20000
            -OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0
            -CG:push_pop_int_saved_regs=off
```

C++ benchmarks:

471.omnetpp: basepeak = yes

```
473.astar: -march=barcelona -mso -fb_create fbdata(pass 1)
          -fb_opt fbdata(pass 2) -Ofast -TENV:frame_pointer=off
          -WOPT:if_conv=0 -GRA:optimize_boundary=on
          -OPT:alias=disjoint -INLINE:aggressive=on
          -IPA:small_pu=3000 -IPA:plimit=3000 -m32
          -HP:bdt=2m:heap=2m
```

```
483.xalancbmk: -march=barcelona -mso -Ofast -INLINE:aggressive=on -m32
              -CG:cmp_peep=on -GRA:unspill=on -TENV:frame_pointer=off
              -fno-emit-exceptions
              -L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.html>
<http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.xml>
<http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 14:54:22 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 October 2010.