



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint®2006 = 23.8

IBM System x3630 M3 (Intel Xeon E5506)

SPECint_base2006 = 21.9

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Sep-2010

Hardware Availability: Oct-2010

Software Availability: Jan-2010

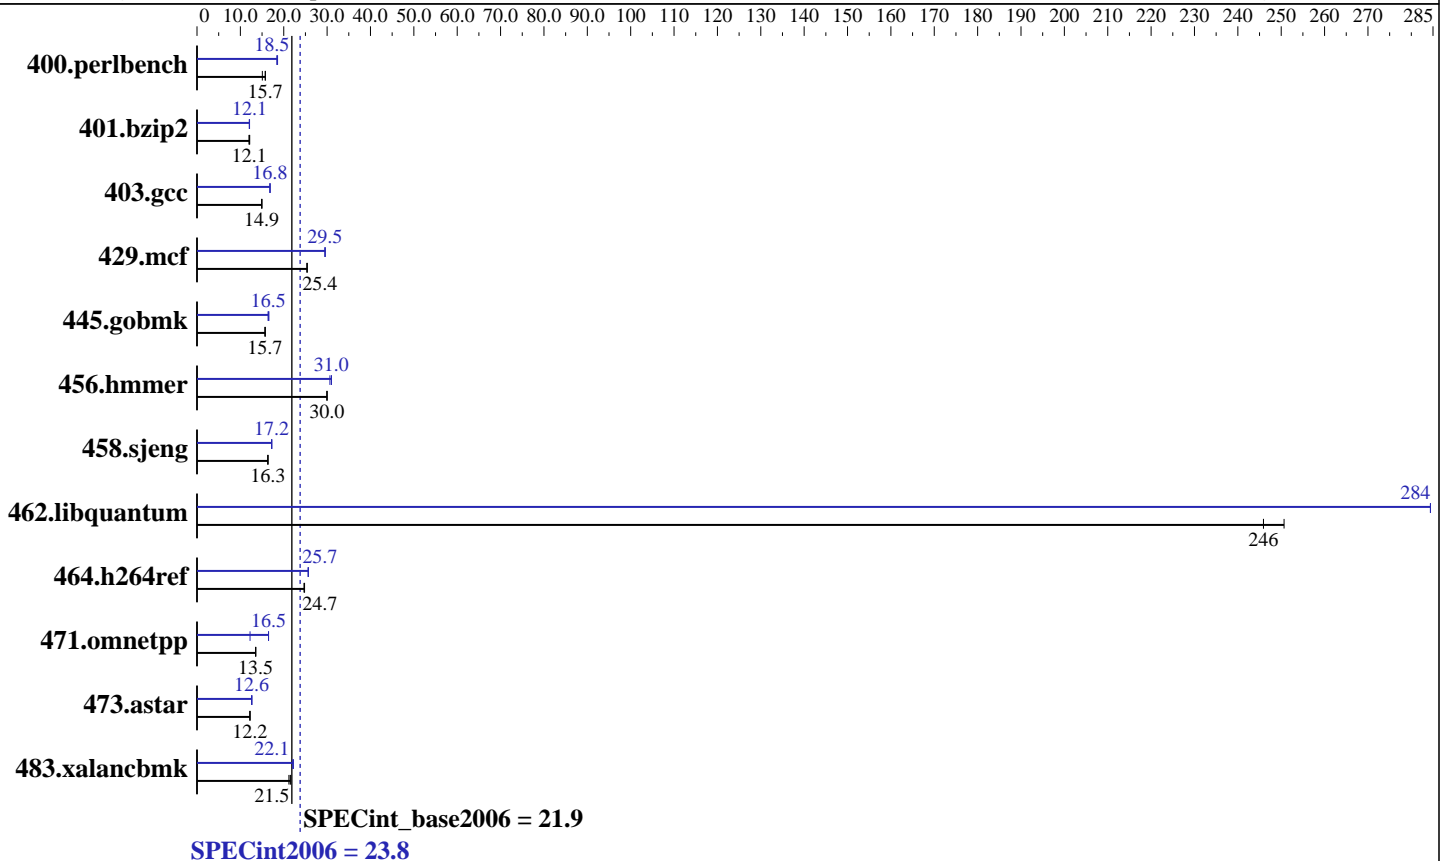

Hardware

CPU Name: Intel Xeon E5506
 CPU Characteristics: 2133
 CPU MHz: Integrated
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 4 MB I+D on chip per chip
 Other Cache: None
 Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R, ECC, running at 800 MHz and CL6)
 Disk Subsystem: 1 x 146 GB SAS, 15000 RPM
 Other Hardware: None

Software

Operating System: SuSe Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-default
 Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.064
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 23.8

IBM System x3630 M3 (Intel Xeon E5506)

SPECint_base2006 = 21.9

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Sep-2010

Hardware Availability: Oct-2010

Software Availability: Jan-2010

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	648	15.1	620	15.8	<u>621</u>	<u>15.7</u>	526	18.6	<u>529</u>	<u>18.5</u>	530	18.4
401.bzip2	794	12.2	804	12.0	<u>800</u>	<u>12.1</u>	<u>797</u>	<u>12.1</u>	797	12.1	801	12.0
403.gcc	<u>539</u>	<u>14.9</u>	538	15.0	540	14.9	479	16.8	478	16.9	<u>478</u>	<u>16.8</u>
429.mcf	360	25.4	<u>359</u>	<u>25.4</u>	359	25.4	309	29.5	<u>309</u>	<u>29.5</u>	308	29.6
445.gobmk	667	15.7	669	15.7	<u>668</u>	<u>15.7</u>	633	16.6	<u>637</u>	<u>16.5</u>	640	16.4
456.hammer	311	30.0	<u>311</u>	<u>30.0</u>	311	30.0	<u>301</u>	<u>31.0</u>	304	30.6	301	31.0
458.sjeng	<u>740</u>	<u>16.3</u>	739	16.4	741	16.3	<u>703</u>	<u>17.2</u>	703	17.2	702	17.2
462.libquantum	84.3	246	<u>84.3</u>	<u>246</u>	82.7	251	<u>72.9</u>	284	<u>72.9</u>	284	<u>72.9</u>	<u>284</u>
464.h264ref	<u>895</u>	<u>24.7</u>	896	24.7	892	24.8	<u>863</u>	<u>25.7</u>	862	25.7	863	25.7
471.omnetpp	<u>462</u>	<u>13.5</u>	463	13.5	461	13.6	379	16.5	<u>379</u>	<u>16.5</u>	511	12.2
473.astar	<u>575</u>	<u>12.2</u>	575	12.2	575	12.2	558	12.6	554	12.7	<u>557</u>	<u>12.6</u>
483.xalancbmk	319	21.6	<u>321</u>	<u>21.5</u>	326	21.2	<u>312</u>	<u>22.1</u>	312	22.1	311	22.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Platform Notes

BIOS Settings:
Turbo Mode Enable
Turbo Boost set to Traditional
CPU C State Enable

General Notes

Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502
'ulimit -s unlimited' was used to set the stack size to unlimited prior to run
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 23.8

IBM System x3630 M3 (Intel Xeon E5506)

SPECint_base2006 = 21.9

CPU2006 license: 11

Test date: Sep-2010

Test sponsor: IBM Corporation

Hardware Availability: Oct-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

Base Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

```

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32

429.mcf: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

C++ benchmarks (except as noted below):

icpc -m32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 23.8

IBM System x3630 M3 (Intel Xeon E5506)

SPECint_base2006 = 21.9

CPU2006 license: 11

Test date: Sep-2010

Test sponsor: IBM Corporation

Hardware Availability: Oct-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

Peak Compiler Invocation (Continued)

473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
 401.bzip2: -DSPEC_CPU_LP64
 403.gcc: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 473.astar: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div -static(pass 2) -prof-use(pass 2)
 -auto-ilp32 -opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc
 -opt-malloc-options=3 -auto-ilp32

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
 -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
 -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -unroll4

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -parallel
 -opt-prefetch -par-schedule-static=32768 -ansi-alias

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
 -prof-use(pass 2) -unroll2 -ansi-alias

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 23.8

IBM System x3630 M3 (Intel Xeon E5506)

SPECint_base2006 = 21.9

CPU2006 license: 11

Test date: Sep-2010

Test sponsor: IBM Corporation

Hardware Availability: Oct-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch
-Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100929.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100929.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 14:03:44 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 9 November 2010.