



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server AS-1012G-MTF,
AMD Opteron 6174

SPECfp®_rate2006 = 160

SPECfp_rate_base2006 = 146

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2010

Hardware Availability: Mar-2010

Software Availability: Jul-2010

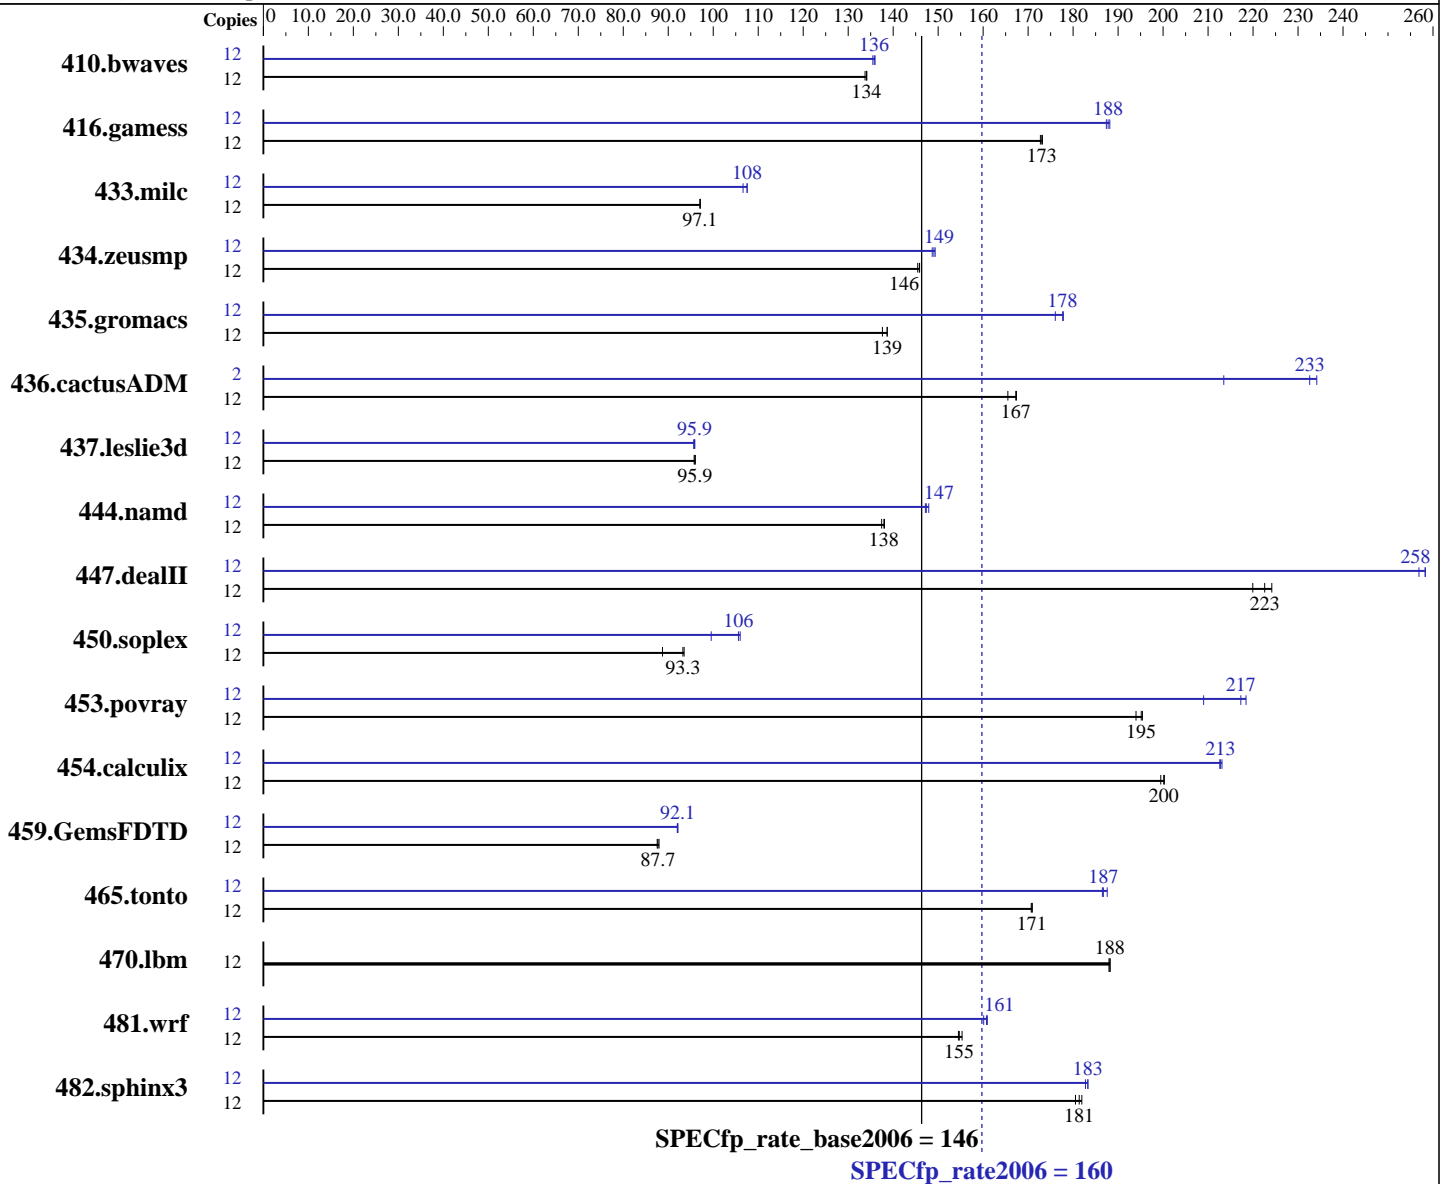

Hardware

CPU Name: AMD Opteron 6174
 CPU Characteristics:
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 12 cores, 1 chip, 12 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 5.5,
Kernel 2.6.18-194.el5
 Compiler: x86 Open64 4.2.4 Compiler Suite (from AMD)
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: binutils 2.18



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server AS-1012G-MTF,
AMD Opteron 6174

SPECfp_rate2006 = 160

SPECfp_rate_base2006 = 146

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2010

Hardware Availability: Mar-2010

Software Availability: Jul-2010

L3 Cache: 12 MB I+D on chip per chip, 6 MB shared / 6 cores
Other Cache: None
Memory: 32 GB (8 x 4 GB 2Rx8 PC3-10600R-9, ECC)
Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
Other Hardware: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	12	1219	134	1216	134	<u>1216</u>	<u>134</u>	12	1204	135	1199	136	<u>1201</u>	<u>136</u>
416.gamess	12	1357	173	<u>1358</u>	<u>173</u>	1360	173	12	<u>1251</u>	<u>188</u>	1249	188	1254	187
433.milc	12	1134	97.1	1135	97.1	<u>1135</u>	<u>97.1</u>	12	<u>1025</u>	<u>108</u>	1024	108	1033	107
434.zeusmp	12	749	146	751	145	<u>749</u>	<u>146</u>	12	731	149	734	149	<u>733</u>	<u>149</u>
435.gromacs	12	623	138	618	139	<u>618</u>	<u>139</u>	12	487	176	<u>482</u>	<u>178</u>	482	178
436.cactusADM	12	857	167	<u>857</u>	<u>167</u>	866	165	2	112	213	<u>103</u>	<u>233</u>	102	234
437.leslie3d	12	1175	96.0	<u>1176</u>	<u>95.9</u>	1178	95.8	12	1179	95.6	<u>1177</u>	<u>95.9</u>	1176	95.9
444.namd	12	700	137	<u>698</u>	<u>138</u>	697	138	12	<u>653</u>	<u>147</u>	654	147	651	148
447.dealII	12	612	224	624	220	<u>617</u>	<u>223</u>	12	534	257	531	258	<u>532</u>	<u>258</u>
450.soplex	12	1128	88.7	1070	93.5	<u>1073</u>	<u>93.3</u>	12	1005	99.6	<u>948</u>	<u>106</u>	944	106
453.povray	12	329	194	327	195	<u>327</u>	<u>195</u>	12	305	209	292	218	<u>294</u>	<u>217</u>
454.calculix	12	<u>495</u>	<u>200</u>	496	199	494	200	12	465	213	466	213	<u>465</u>	<u>213</u>
459.GemsFDTD	12	<u>1452</u>	<u>87.7</u>	1448	88.0	1454	87.5	12	1382	92.1	1384	92.0	<u>1383</u>	<u>92.1</u>
465.tonto	12	692	171	691	171	<u>691</u>	<u>171</u>	12	633	187	<u>632</u>	<u>187</u>	629	188
470.lbm	12	876	188	<u>876</u>	<u>188</u>	877	188	12	876	188	<u>876</u>	<u>188</u>	877	188
481.wrf	12	863	155	868	155	<u>866</u>	<u>155</u>	12	837	160	833	161	<u>834</u>	<u>161</u>
482.sphinx3	12	1296	181	<u>1290</u>	<u>181</u>	1285	182	12	1280	183	1276	183	<u>1276</u>	<u>183</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=5400 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server AS-1012G-MTF,
AMD Opteron 6174

SPECfp_rate2006 = 160

SPECfp_rate_base2006 = 146

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2010

Hardware Availability: Mar-2010

Software Availability: Jul-2010

Platform Notes

Fan speed set to Full Speed in BIOS Setup.
The system uses a Supermicro H8SGL-F motherboard.

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_LIMIT = "450"

LD_LIBRARY_PATH = "/usr/cpu2006/amd1002-rate-libs-revC/64:/usr/cpu2006/amd1002-rate-libs-revC/32"

OMP_NUM_THREADS = "6"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
<http://developer.amd.com/cpu/open64>

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Fortran benchmarks:
openf95

Benchmarks using both Fortran and C:
opencc openf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
-fno-second-underscore

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server AS-1012G-MTF,
AMD Opteron 6174

SPECfp_rate2006 = 160

SPECfp_rate_base2006 = 146

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2010

Hardware Availability: Mar-2010

Software Availability: Jul-2010

Base Portability Flags (Continued)

482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-march=barcelona -mso -Ofast -OPT:malloc_alg=1 -HP:bdt=2m

C++ benchmarks:

-march=barcelona -mso -Ofast -static -INLINE:aggressive=on
-OPT:malloc_alg=1 -HP:bdt=2m

Fortran benchmarks:

-march=barcelona -mso -Ofast -HP

Benchmarks using both Fortran and C:

-march=barcelona -mso -Ofast -OPT:malloc_alg=1 -HP:bdt=2m -HP

Peak Compiler Invocation

C benchmarks:

openc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

openc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64

436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore

437.leslie3d: -DSPEC_CPU_LP64

444.namd: -DSPEC_CPU_LP64

453.povray: -DSPEC_CPU_LP64

454.calculix: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server AS-1012G-MTF,
AMD Opteron 6174

SPECfp_rate2006 = 160

SPECfp_rate_base2006 = 146

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2010

Hardware Availability: Mar-2010

Software Availability: Jul-2010

Peak Portability Flags (Continued)

459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG
 -fno-second-underscore
 482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -march=barcelona -mso -Ofast -CG:movnti=1
 -CG:local_sched_alg=1 -CG:locs_shallow_depth=1
 -HP:bdt=2m:heap=2m -LNO:prefetch=3

470.lbm: basepeak = yes

482.sphinx3: -march=barcelona -mso -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -OPT:malloc_alg=2
 -CG:sse_cse_regs=0 -CG:locs_shallow_depth=1 -CG:cmp_peep=on
 -CG:local_sched_alg=1 -INLINE:aggressive=on

C++ benchmarks:

444.namd: -march=barcelona -mso -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -LNO:ignore_feedback=off
 -CG:local_sched_alg=2 -CG:load_exe=0 -CG:compute_to=on
 -OPT:unroll_size=256 -fno-exceptions -HP:bdt=2m:heap=2m

447.dealIII: -march=barcelona -mso -Ofast -static -INLINE:aggressive=on
 -LNO:opt=0 -fno-emit-exceptions -m32
 -OPT:unroll_times_max=8 -OPT:unroll_size=256
 -OPT:unroll_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on
 -CG:cmp_peep=on -TENV:frame_pointer=off

450.soplex: -march=barcelona -mso -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on
 -OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
 -OPT:fold_unsigned_relops=on -OPT:malloc_alg=1
 -CG:load_exe=0 -fno-exceptions -m32 -HP:bdt=2m

453.povray: -march=barcelona -mso -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on

Fortran benchmarks:

410.bwaves: -march=barcelona -mso -O3 -OPT:Ofast -OPT:treeheight=on
 -LNO:blocking=off -LNO:prefetch_ahead=5
 -LNO:ignore_feedback=off -WOPT:aggstr=0 -HP:bdt=2m:heap=2m

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server AS-1012G-MTF,
AMD Opteron 6174

SPECfp_rate2006 = 160

SPECfp_rate_base2006 = 146

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2010

Hardware Availability: Mar-2010

Software Availability: Jul-2010

Peak Optimization Flags (Continued)

410.bwaves (continued):

-CG:cmp_peep=on

416.gamess: -march=barcelona -mso -fb_create fbdata(pass 1)

-fb_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0

-LNO:prefetch=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256

-HP:bdt=2m:heap=2m

434.zeusmp: -march=barcelona -mso -Ofast -LNO:blocking=off

-LNO:interchange=off -OPT:treeheight=on -OPT:unroll_size=256

-CG:cmp_peep=on -GRA:prioritize_by_density=on -HP

437.leslie3d: -march=barcelona -mso -Ofast -HP:bdt=2m:heap=2m

459.GemsFDTD: -march=barcelona -mso -Ofast -LNO:fission=2

-LNO:prefetch_ahead=1 -CG:load_exe=0 -CG:local_sched_alg=1

-HP

465.tonto: -march=barcelona -mso -Ofast

-OPT:alias=no_f90_pointer_alias -LNO:blocking=off

-CG:load_exe=1 -IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -mso -Ofast -OPT:rsqrt=2

-HP:bdt=2m:heap=2m

436.cactusADM: -march=barcelona -mso -fb_create fbdata(pass 1)

-fb_opt fbdata(pass 2) -Ofast -apo -LNO:prefetch_ahead=1

-HP:bdt=2m:heap=2m -LANG:heap_allocation_threshold=100

454.calculix: -march=barcelona -mso -Ofast -CG:load_exe=0

-CG:ptr_load_use=0 -CG:local_sched_alg=2 -CG:compute_to=on

-LNO:prefetch_ahead=30 -WOPT:unroll=2

-GRA:optimize_boundary=on -HP:bdt=2m:heap=2m

481.wrf: -march=barcelona -mso -Ofast -LNO:blocking=off

-LNO:prefetch_ahead=10 -LANG:copyinout=off

-IPA:callee_limit=5000 -GRA:prioritize_by_density=on -m3dnow

-HP

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.html>

<http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.20110119.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.xml>

<http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.20110119.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server AS-1012G-MTF,
AMD Opteron 6174

SPECfp_rate2006 = 160

SPECfp_rate_base2006 = 146

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2010

Hardware Availability: Mar-2010

Software Availability: Jul-2010

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 16:56:49 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 18 January 2011.