



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server AS-1012G-MTF,
AMD Opteron 6174

SPECint®2006 = 21.1

SPECint_base2006 = 17.7

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

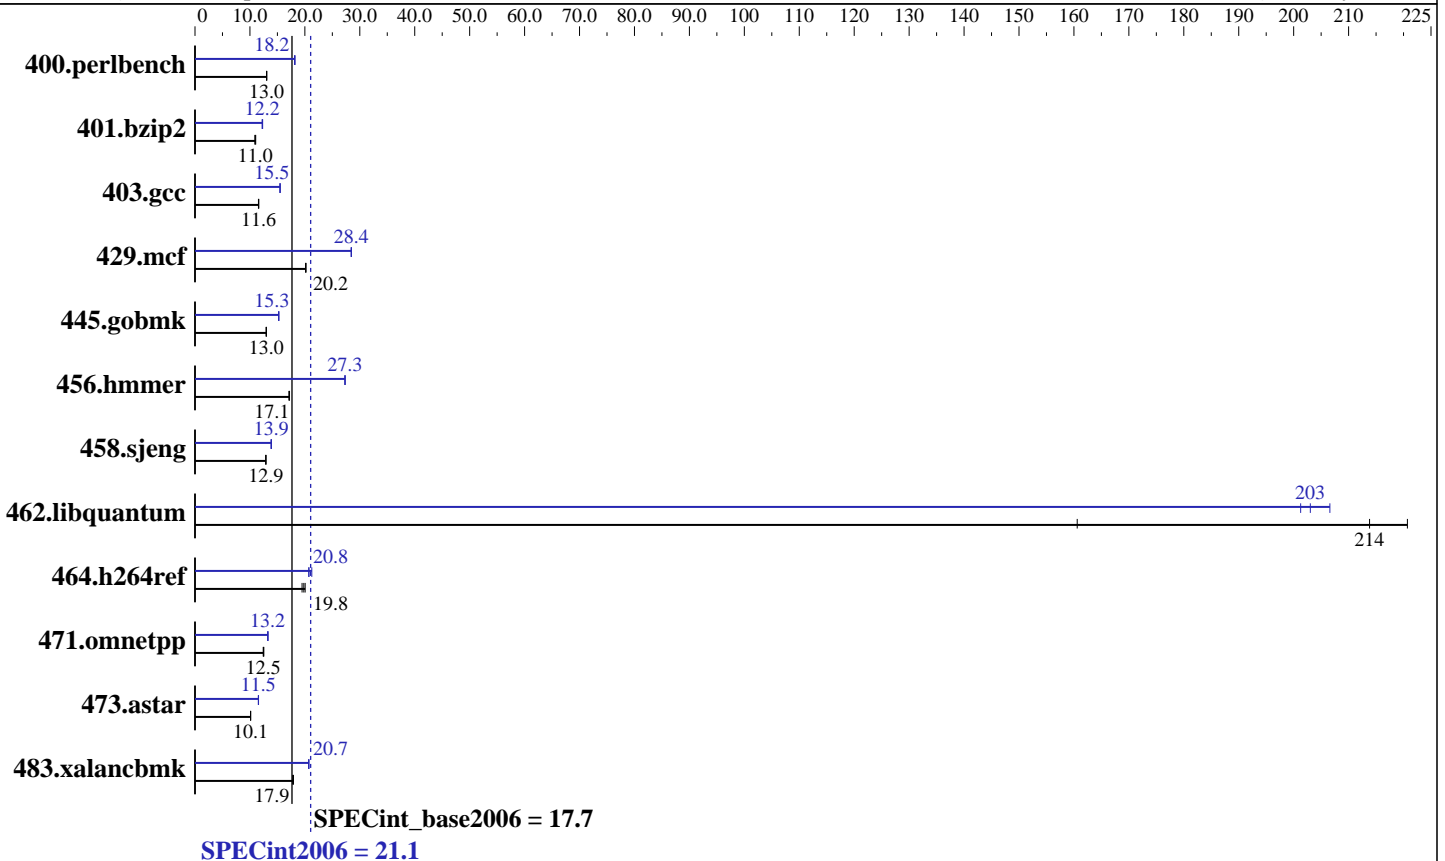

Hardware

CPU Name: AMD Opteron 6174
 CPU Characteristics:
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 12 cores, 1 chip, 12 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core
 L3 Cache: 12 MB I+D on chip per chip, 6 MB shared / 6 cores
 Other Cache: None
 Memory: 32 GB (8 x 4 GB 2Rx8 PC3-10600R-9, ECC)
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 5.5,
Kernel 2.6.18-194.el5
 Compiler: x86 Open64 4.2.3.2 Compiler Suite (from AMD)
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: binutils 2.18
SmartHeap 8.1 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server AS-1012G-MTF,
AMD Opteron 6174

SPECint2006 = 21.1

SPECint_base2006 = 17.7

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	750	13.0	<u>749</u>	<u>13.0</u>	748	13.1	539	18.1	<u>537</u>	<u>18.2</u>	537	18.2
401.bzip2	873	11.1	<u>881</u>	<u>11.0</u>	884	10.9	788	12.2	<u>788</u>	<u>12.2</u>	784	12.3
403.gcc	<u>695</u>	<u>11.6</u>	697	11.6	694	11.6	520	15.5	520	15.5	<u>520</u>	<u>15.5</u>
429.mcf	453	20.1	452	20.2	<u>452</u>	<u>20.2</u>	320	28.5	<u>321</u>	<u>28.4</u>	321	28.4
445.gobmk	808	13.0	809	13.0	<u>808</u>	<u>13.0</u>	688	15.2	688	15.3	<u>688</u>	<u>15.3</u>
456.hammer	542	17.2	545	17.1	<u>544</u>	<u>17.1</u>	342	27.3	341	27.3	<u>342</u>	<u>27.3</u>
458.sjeng	<u>938</u>	<u>12.9</u>	938	12.9	939	12.9	<u>872</u>	<u>13.9</u>	874	13.8	869	13.9
462.libquantum	93.9	221	<u>96.9</u>	<u>214</u>	129	161	100	207	<u>102</u>	<u>203</u>	103	201
464.h264ref	1104	20.1	<u>1117</u>	<u>19.8</u>	1136	19.5	1069	20.7	<u>1066</u>	<u>20.8</u>	1041	21.3
471.omnetpp	499	12.5	<u>501</u>	<u>12.5</u>	503	12.4	<u>472</u>	<u>13.2</u>	470	13.3	472	13.2
473.astar	694	10.1	<u>693</u>	<u>10.1</u>	693	10.1	609	11.5	607	11.6	<u>608</u>	<u>11.5</u>
483.xalancbmk	<u>386</u>	<u>17.9</u>	385	17.9	388	17.8	<u>333</u>	<u>20.7</u>	333	20.7	333	20.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=2000 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

cpuspeed stop was used to set the CPU frequency to its maximum.

Platform Notes

Fan speed set to Full Speed in BIOS Setup.
The system uses a Supermicro H8SGL-F motherboard.

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/usr/cpu2006/amd1002-speed-libs-revA/64:/usr/cpu2006/amd1002-speed-libs-revA/32"
O64_OMP_AFFINITY_MAP = "0,1,2,3,4,5,6,7,8,9,10,11"
O64_OMP_SPIN_USER_LOCK = "true"

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server AS-1012G-MTF,
AMD Opteron 6174

SPECint2006 = 21.1

SPECint_base2006 = 17.7

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

General Notes (Continued)

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Base Compiler Invocation

C benchmarks:

opencc

C++ benchmarks:

openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-march=barcelona -Ofast -apo -CG:local_sched_alg=1
-HP:bdt=2m:heap=2m,limit=450 -LNO:parallel_overhead=10000

C++ benchmarks:

-march=barcelona -Ofast -m32 -INLINE:aggressive=on -CG:cmp_peep=on
-L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap

Peak Compiler Invocation

C benchmarks:

opencc

C++ benchmarks:

openCC



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server AS-1012G-MTF,
AMD Opteron 6174

SPECint2006 = 21.1

SPECint_base2006 = 17.7

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalanbmk: -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
               -fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
               -OPT:unroll_times_max=8 -OPT:unroll_size=256
               -OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
               -CG:local_sched_alg=1 -CG:unroll_fb_req=on
               -HP:bdt=2m:heap=2m

401.bzip2: -march=barcelona -fb_create fbdata(pass 1)
           -fb_opt fbdata(pass 2) -O3 -OPT:alias=disjoint
           -OPT:goto=off -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
         -fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
         -LNO:prefetch_ahead=10 -CG:cmp_peep=on -m32
         -HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200

429.mcf: -march=barcelona -O3 -ipa -INLINE:aggressive=on
         -CG:gcm=off -GRA:prioritize_by_density=on -m32
         -HP:bdt=2m:heap=2m

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
           -fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict
           -OPT:unroll_times_max=8 -OPT:unroll_size=256
           -OPT:unroll_level=2 -OPT:keep_ext=on -ipa -IPA:plimit=750
           -IPA:min_hotness=300 -IPA:pu_reorder=1 -LNO:prefetch=1
           -LNO:ignore_feedback=off -CG:p2align=on
           -CG:unroll_fb_req=on -HP:bdt=2m:heap=2m

456.hmmer: -march=barcelona -fb_create fbdata(pass 1)
           -fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=0
           -OPT:alias=disjoint -OPT:unroll_times_max=8
           -OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
           -CG:local_sched_alg=1 -CG:cflow=0
           -CG:push_pop_int_saved_regs=off -CG:cmp_peep=on
           -HP:bdt=2m:heap=2m

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server AS-1012G-MTF,
AMD Opteron 6174

SPECint2006 = 21.1

SPECint_base2006 = 17.7

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

Peak Optimization Flags (Continued)

458.sjeng: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -ipa -LNO:ignore_feedback=off
-LNO:full_unroll=10 -LNO:fusion=0 -LNO:fission=2
-IPA:pu_reorder=2 -IPA:min_hotness=32 -CG:ptr_load_use=0
-OPT:unroll_times_max=8 -INLINE:aggressive=on
-HP:bdt=2m:heap=2m

462.libquantum: -march=barcelona -Ofast -apo -LNO:pf2=0 -CG:gcm=off
-CG:use_prefetchnta=on -CG:cmp_peep=on -WOPT:aggstr=0
-OPT:alias=disjoint -INLINE:aggressive=on -IPA:space=1000
-IPA:plimit=20000 -mso

464.h264ref: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -IPA:plimit=20000
-OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0
-CG:push_pop_int_saved_regs=off -HP:bdt=2m:heap=2m

C++ benchmarks:

471.omnetpp: -march=barcelona -Ofast -CG:gcm=off -INLINE:aggressive=on
-WOPT:if_conv=0 -m32 -HP:bdt=2m:heap=2m

473.astar: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -TENV:frame_pointer=off
-WOPT:if_conv=0 -GRA:optimize_boundary=on
-OPT:alias=disjoint -INLINE:aggressive=on
-IPA:small_pu=3000 -IPA:plimit=3000 -m32
-HP:bdt=2m:heap=2m

483.xalancbmk: -march=barcelona -Ofast -INLINE:aggressive=on -m32
-CG:cmp_peep=on -GRA:unspill=on -TENV:frame_pointer=off
-fno-emit-exceptions
-L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-423-flags-speed-revA.20101207.html>

<http://www.spec.org/cpu2006/flags/amd-platform-speed-revA.20101207.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-423-flags-speed-revA.20101207.xml>

<http://www.spec.org/cpu2006/flags/amd-platform-speed-revA.20101207.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server AS-1012G-MTF,
AMD Opteron 6174

SPECint2006 = 21.1

SPECint_base2006 = 17.7

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 16:56:34 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 18 January 2011.