



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp[®]_rate2006 = 119

PRIMERGY RX200 S6, Intel Xeon E5649, 2.53 GHz

SPECfp_rate_base2006 = 116

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jan-2011

Hardware Availability: Jul-2010

Software Availability: Nov-2010

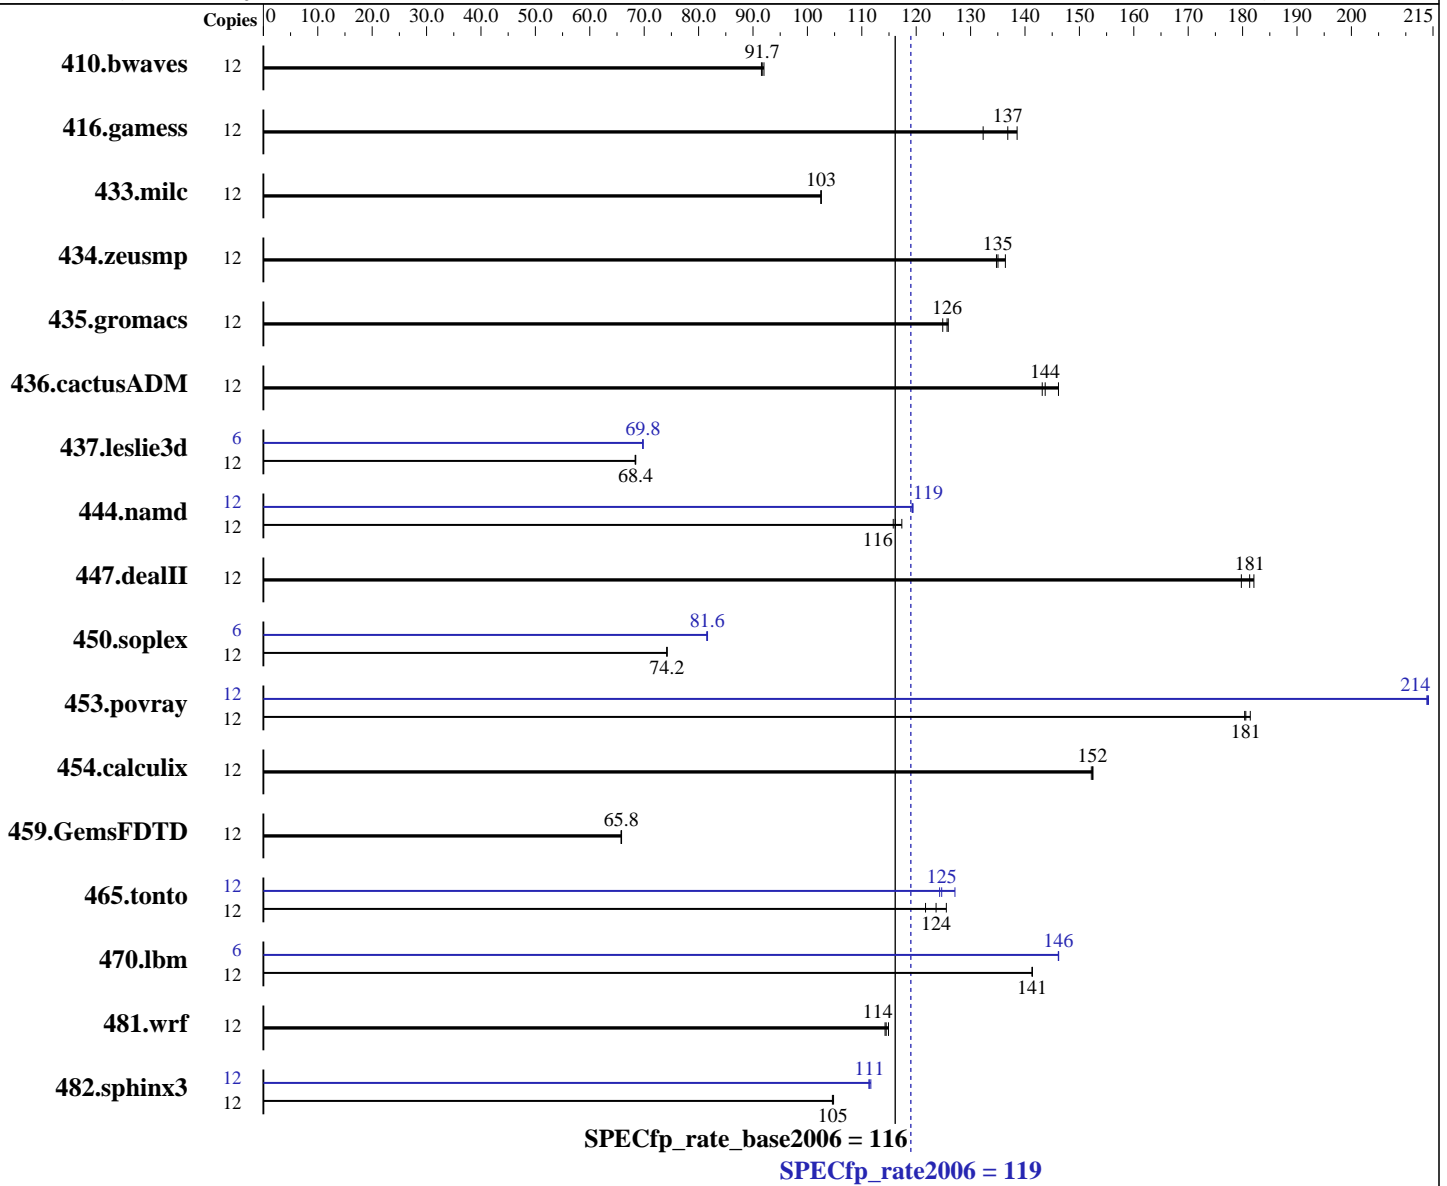

Hardware

CPU Name: Intel Xeon E5649
 CPU Characteristics: Intel Turbo Boost Technology up to 2.93 GHz
 CPU MHz: 2533
 FPU: Integrated
 CPU(s) enabled: 6 cores, 1 chip, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64) with SP1, Kernel 2.6.32.12-0.7-default
 Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64, Version 12.0.0.082 Build 20101006
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 119

PRIMERGY RX200 S6, Intel Xeon E5649, 2.53 GHz

SPECfp_rate_base2006 = 116

CPU2006 license: 19

Test date: Jan-2011

Test sponsor: Fujitsu

Hardware Availability: Jul-2010

Tested by: Fujitsu

Software Availability: Nov-2010

L3 Cache: 12 MB I+D on chip per chip
 Other Cache: None
 Memory: 24 GB (6 x 4 GB 2Rx4 PC3-10600R-9, ECC)
 Disk Subsystem: 1 x SAS, 300 GB, 10000 RPM
 Other Hardware: --

Peak Pointers: 32/64-bit
 Other Software: none

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	12	1772	92.0	<u>1778</u>	<u>91.7</u>	1781	91.6	12	1772	92.0	<u>1778</u>	<u>91.7</u>	1781	91.6
416.gamess	12	1696	139	1776	132	<u>1717</u>	<u>137</u>	12	1696	139	1776	132	<u>1717</u>	<u>137</u>
433.milc	12	1075	102	<u>1074</u>	<u>103</u>	1074	103	12	1075	102	<u>1074</u>	<u>103</u>	1074	103
434.zeusmp	12	801	136	810	135	<u>809</u>	<u>135</u>	12	801	136	810	135	<u>809</u>	<u>135</u>
435.gromacs	12	686	125	681	126	<u>682</u>	<u>126</u>	12	686	125	681	126	<u>682</u>	<u>126</u>
436.cactusADM	12	1002	143	981	146	<u>998</u>	<u>144</u>	12	1002	143	981	146	<u>998</u>	<u>144</u>
437.leslie3d	12	1651	68.3	<u>1649</u>	<u>68.4</u>	1648	68.4	6	<u>808</u>	<u>69.8</u>	808	69.8	809	69.7
444.namd	12	831	116	<u>829</u>	<u>116</u>	820	117	12	806	119	<u>807</u>	<u>119</u>	807	119
447.dealII	12	<u>757</u>	<u>181</u>	764	180	754	182	12	<u>757</u>	<u>181</u>	764	180	754	182
450.soplex	12	1349	74.2	<u>1349</u>	<u>74.2</u>	1349	74.2	6	<u>613</u>	<u>81.6</u>	614	81.5	613	81.6
453.povray	12	<u>354</u>	<u>181</u>	354	180	352	181	12	298	214	<u>298</u>	<u>214</u>	298	214
454.calculix	12	649	152	<u>650</u>	<u>152</u>	651	152	12	649	152	<u>650</u>	<u>152</u>	651	152
459.GemsFDTD	12	1937	65.7	1934	65.8	<u>1934</u>	<u>65.8</u>	12	1937	65.7	1934	65.8	<u>1934</u>	<u>65.8</u>
465.tonto	12	970	122	<u>955</u>	<u>124</u>	941	126	12	950	124	929	127	<u>947</u>	<u>125</u>
470.lbm	12	1166	141	1167	141	<u>1167</u>	<u>141</u>	6	564	146	<u>564</u>	<u>146</u>	564	146
481.wrf	12	<u>1171</u>	<u>114</u>	1173	114	1167	115	12	<u>1171</u>	<u>114</u>	1173	114	1167	115
482.sphinx3	12	2231	105	<u>2234</u>	<u>105</u>	2236	105	12	2094	112	2101	111	<u>2099</u>	<u>111</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
Large pages were not enabled for this run

Platform Notes

BIOS configuration:
Data Reuse Optimization = Disable



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 119

PRIMERGY RX200 S6, Intel Xeon E5649, 2.53 GHz

SPECfp_rate_base2006 = 116

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Jan-2011
Hardware Availability: Jul-2010
Software Availability: Nov-2010

General Notes

For information about Fujitsu please visit: <http://www.fujitsu.com>
Binaries were compiled on SLES 10 SP1 with Binutils 2.18.50.0.7.20080502

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -ansi-alias

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 119

PRIMERGY RX200 S6, Intel Xeon E5649, 2.53 GHz

SPECfp_rate_base2006 = 116

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jan-2011

Hardware Availability: Jul-2010

Software Availability: Nov-2010

Base Optimization Flags (Continued)

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -ansi-alias

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 119

PRIMERGY RX200 S6, Intel Xeon E5649, 2.53 GHz

SPECfp_rate_base2006 = 116

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jan-2011

Hardware Availability: Jul-2010

Software Availability: Nov-2010

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
-ansi-alias -opt-prefetch -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

459.GemsFDTD: basepeak = yes

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 119

PRIMERGY RX200 S6, Intel Xeon E5649, 2.53 GHz

SPECfp_rate_base2006 = 116

CPU2006 license: 19

Test date: Jan-2011

Test sponsor: Fujitsu

Hardware Availability: Jul-2010

Tested by: Fujitsu

Software Availability: Nov-2010

Peak Optimization Flags (Continued)

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revA.20110222.00.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revA.20110222.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 17:04:51 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 21 February 2011.