



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint®_rate2006 = 1020

NovaScale R480 F2 (Intel Xeon E7-4860, 2.27 GHz)

SPECint_rate_base2006 = 950

CPU2006 license: 20


Test date: Mar-2011

Test sponsor: Bull SAS

Hardware Availability: Apr-2011

Tested by: Dell Inc.

Software Availability: Apr-2011

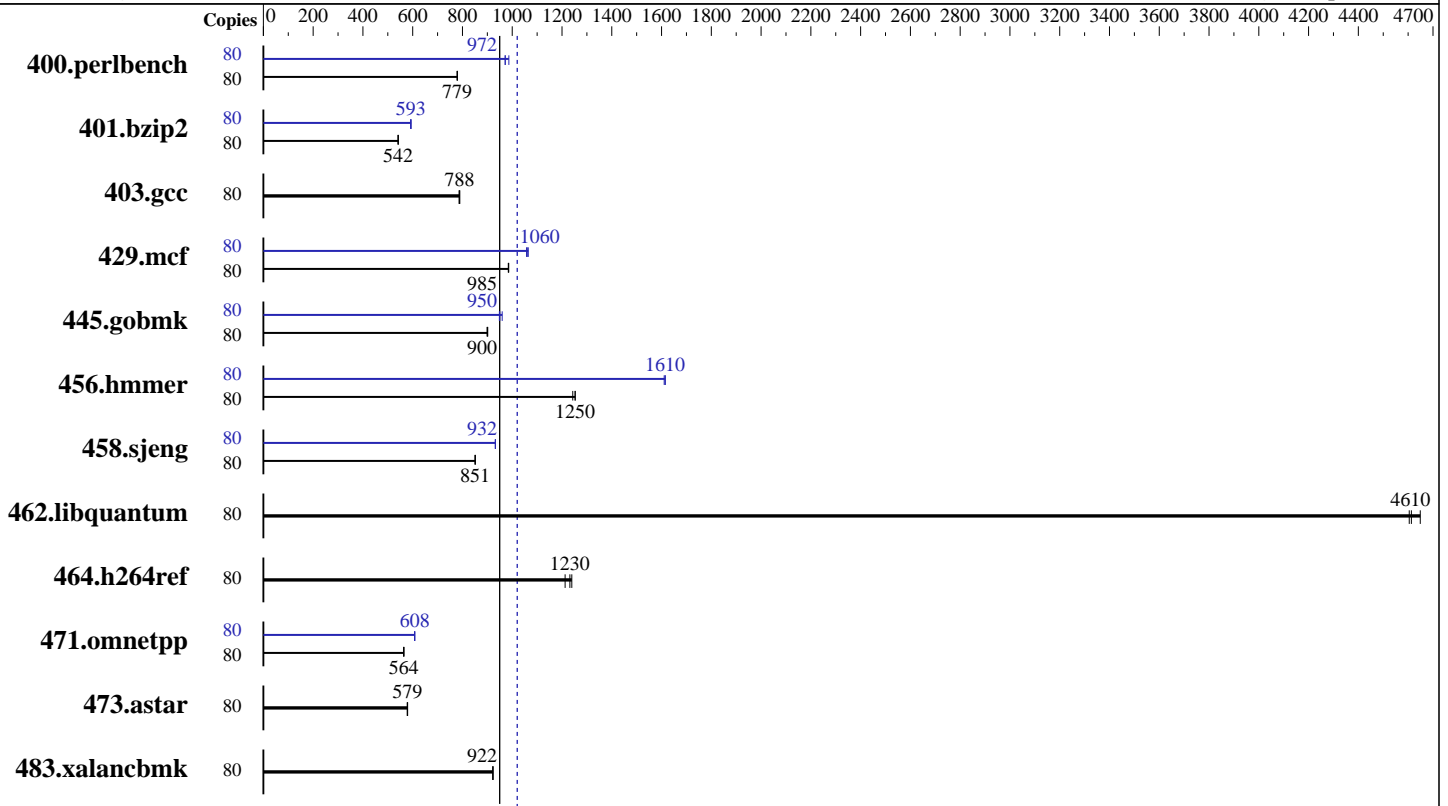

SPECint_rate2006 = 1020

SPECint_rate_base2006 = 950

Hardware

CPU Name: Intel Xeon E7-4860
 CPU Characteristics: Intel Turbo Boost Technology up to 2.67 GHz
 CPU MHz: 2267
 FPU: Integrated
 CPU(s) enabled: 40 cores, 4 chips, 10 cores/chip, 2 threads/core
 CPU(s) orderable: 2,4 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 24 MB I+D on chip per chip
 Other Cache: None
 Memory: 512 GB (64 x 8 GB 4Rx8 PC3-8500R-7, ECC)
 Disk Subsystem: 1 x 500 GB 7200 RPM SAS 6Gb
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86_64), Kernel 2.6.32.12-0.7-default
 Compiler: Intel C++ Compiler XE for applications running on IA-32 Version 12.0.1.116 Build 20101116
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint_rate2006 = 1020

NovaScale R480 F2 (Intel Xeon E7-4860, 2.27 GHz)

SPECint_rate_base2006 = 950

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Dell Inc.

Test date: Mar-2011
Hardware Availability: Apr-2011
Software Availability: Apr-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	80	1002	780	1003	779	1004	779	80	805	971	792	986	804	972
401.bzip2	80	1425	542	1426	541	1424	542	80	1301	593	1305	592	1303	593
403.gcc	80	819	786	818	788	816	789	80	819	786	818	788	816	789
429.mcf	80	741	985	740	986	741	984	80	685	1060	688	1060	690	1060
445.gobmk	80	931	902	932	900	934	899	80	874	960	885	948	884	950
456.hammer	80	600	1240	596	1250	596	1250	80	463	1610	462	1610	462	1610
458.sjeng	80	1137	851	1137	852	1138	851	80	1038	933	1038	932	1039	932
462.libquantum	80	360	4600	357	4650	359	4610	80	360	4600	357	4650	359	4610
464.h264ref	80	1460	1210	1428	1240	1437	1230	80	1460	1210	1428	1240	1437	1230
471.omnetpp	80	885	565	887	564	887	564	80	822	608	823	608	822	608
473.astar	80	970	579	972	578	969	580	80	970	579	972	578	969	580
483.xalancbmk	80	598	922	599	922	598	923	80	598	922	599	922	598	923

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 72000 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

Platform Notes

BIOS Settings:
Power Management = Maximum Performance (Default = Active Power Controller)

General Notes

The Dell PowerEdge R910 and the Bull NovaScale R480 F2 models are electronically equivalent. The results have been measured on a Dell PowerEdge R910 model. Binaries were compiled on RHEL5.5



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint_rate2006 = 1020

NovaScale R480 F2 (Intel Xeon E7-4860, 2.27 GHz)

SPECint_rate_base2006 = 950

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Mar-2011

Hardware Availability: Apr-2011

Software Availability: Apr-2011

Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/smartheap -lsmartheap
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint_rate2006 = 1020

NovaScale R480 F2 (Intel Xeon E7-4860, 2.27 GHz)

SPECint_rate_base2006 = 950

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Dell Inc.

Test date: Mar-2011
Hardware Availability: Apr-2011
Software Availability: Apr-2011

Peak Compiler Invocation (Continued)

C++ benchmarks:
icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

403.gcc: basepeak = yes

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -auto-ilp32

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -auto-ilp32

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint_rate2006 = 1020

NovaScale R480 F2 (Intel Xeon E7-4860, 2.27 GHz)

SPECint_rate_base2006 = 950

CPU2006 license: 20

Test date: Mar-2011

Test sponsor: Bull SAS

Hardware Availability: Apr-2011

Tested by: Dell Inc.

Software Availability: Apr-2011

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110308.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110308.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 19:09:01 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 12 April 2011.