



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint®_rate2006 = 195

Intel DX58SO2 Motherboard (Intel Core i7-990X)

SPECint_rate_base2006 = 179

CPU2006 license: 13


Test date: Apr-2011

Test sponsor: Intel Corporation

Hardware Availability: Feb-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

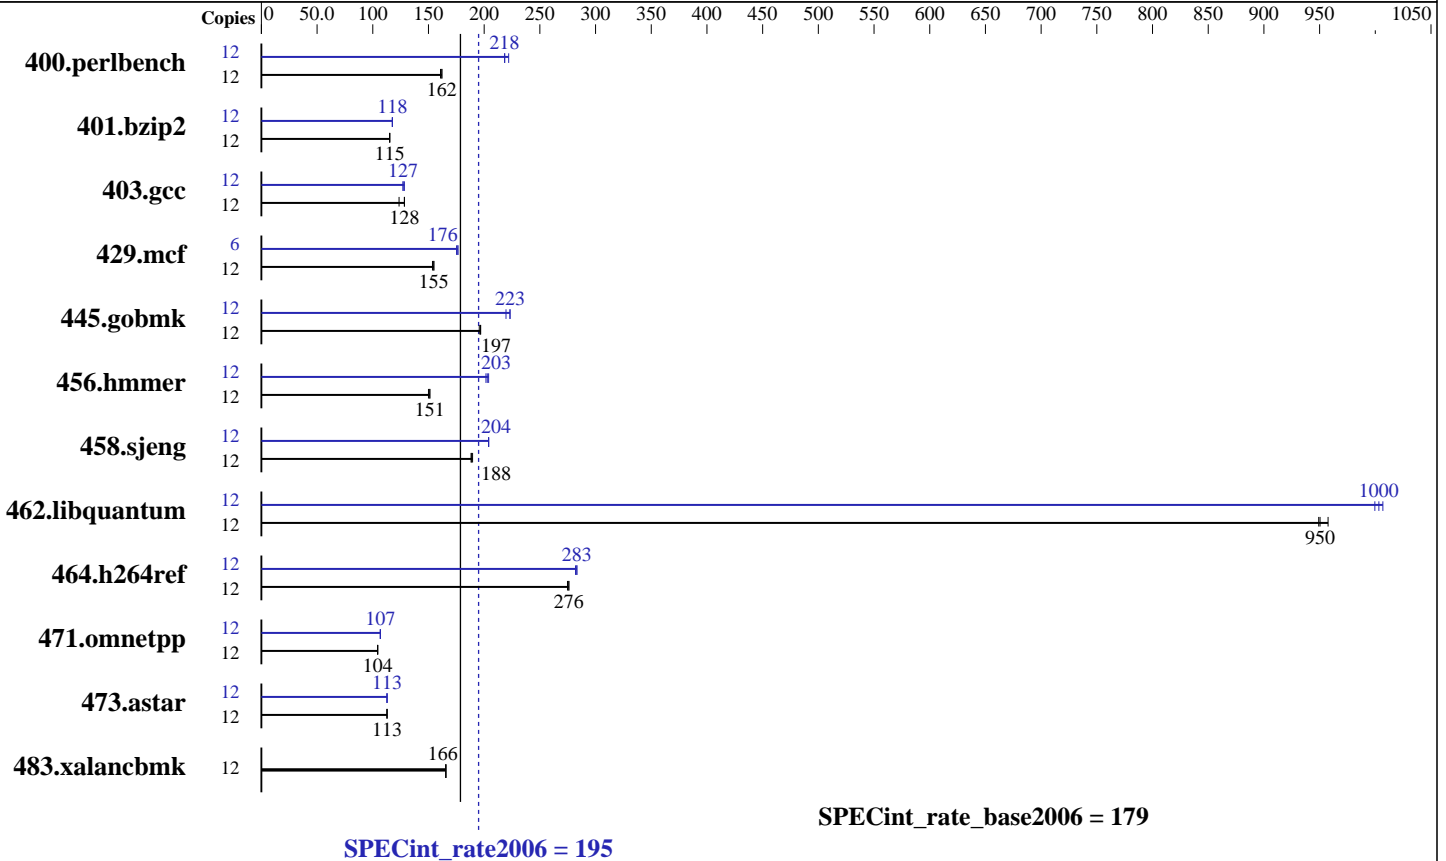

Hardware

CPU Name: Intel Core i7-990X
 CPU Characteristics: Intel Turbo Boost Technology up to 3.73 GHz
 CPU MHz: 3466
 FPU: Integrated
 CPU(s) enabled: 6 cores, 1 chip, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 12 MB I+D on chip per chip
 Other Cache: None
 Memory: 12 GB (3 x 4 GB 2Rx8 PC3-8500U-7)
 Disk Subsystem: Seagate 1 TB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: Windows 7 Ultimate (64-bit)
 Compiler: Intel C++ Compiler XE for IA32 and Intel 64 Version 12.0.3.163 Build 20110217
 Microsoft Visual Studio 2008 Professional SP1 (for libraries)
 Auto Parallel: No
 File System: NTFS
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap Library Version 9.01 from <http://www.microquill.com/>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint_rate2006 = 195

Intel DX58SO2 Motherboard (Intel Core i7-990X)

SPECint_rate_base2006 = 179

CPU2006 license: 13

Test date: Apr-2011

Test sponsor: Intel Corporation

Hardware Availability: Feb-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	12	722	162	731	161	<u>725</u>	<u>162</u>	12	537	218	527	222	<u>535</u>	<u>218</u>
401.bzip2	12	1003	115	1001	115	<u>1002</u>	<u>115</u>	12	984	118	984	118	<u>984</u>	<u>118</u>
403.gcc	12	<u>755</u>	<u>128</u>	778	124	751	128	12	<u>759</u>	<u>127</u>	753	128	761	127
429.mcf	12	713	154	<u>709</u>	<u>155</u>	709	155	6	310	176	<u>311</u>	<u>176</u>	312	175
445.gobmk	12	642	196	<u>639</u>	<u>197</u>	638	197	12	<u>565</u>	<u>223</u>	564	223	573	220
456.hammer	12	739	151	744	150	<u>741</u>	<u>151</u>	12	554	202	<u>551</u>	<u>203</u>	550	204
458.sjeng	12	<u>769</u>	<u>188</u>	768	190	769	188	12	713	204	714	204	<u>714</u>	<u>204</u>
462.libquantum	12	262	949	260	958	<u>262</u>	<u>950</u>	12	249	1000	247	1010	<u>248</u>	<u>1000</u>
464.h264ref	12	<u>963</u>	<u>276</u>	965	275	962	276	12	936	283	941	282	<u>938</u>	<u>283</u>
471.omnetpp	12	718	104	<u>718</u>	<u>104</u>	718	104	12	700	107	700	107	<u>700</u>	<u>107</u>
473.astar	12	743	113	744	113	<u>743</u>	<u>113</u>	12	<u>746</u>	<u>113</u>	746	113	745	113
483.xalanbmk	12	499	166	500	166	<u>499</u>	<u>166</u>	12	499	166	500	166	<u>499</u>	<u>166</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

The start command with the /affinity switch was used to bind processes to cores

General Notes

Tested systems can be used with Shin-G ATX case,

PC Power and Cooling 1200W power supply

System was configured with an ATI HD6990 discrete graphics card

Base Compiler Invocation

C benchmarks:

icl -Qvc9 -Qstd=c99

C++ benchmarks:

icl -Qvc9

Base Portability Flags

403.gcc: -DSPEC_CPU_WIN32

464.h264ref: -DWIN32 -DSPEC_CPU_NO_INTTYPES

483.xalanbmk: -Qoption, cpp, --no_wchar_t_keyword



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint_rate2006 = 195

Intel DX58SO2 Motherboard (Intel Core i7-990X)

SPECint_rate_base2006 = 179

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Apr-2011

Hardware Availability: Feb-2011

Software Availability: Apr-2011

Base Optimization Flags

C benchmarks:

-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

C++ benchmarks:

-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features
/F512000000 shlw32M.lib -link /FORCE:MULTIPLE

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icl -Qvc9 -Qstd=c99

456.hmmer: C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe

458.sjeng: C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe

462.libquantum: C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe
-Qstd=c99

C++ benchmarks (except as noted below):

icl -Qvc9

473.astar: C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe

Peak Portability Flags

403.gcc: -DSPEC_CPU_WIN32

456.hmmer: -DSPEC_CPU_P64

458.sjeng: -DSPEC_CPU_P64

462.libquantum: -DSPEC_CPU_P64

464.h264ref: -DWIN32 -DSPEC_CPU_NO_INTTYPES

473.astar: -DSPEC_CPU_P64

483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint_rate2006 = 195

Intel DX58SO2 Motherboard (Intel Core i7-990X)

SPECint_rate_base2006 = 179

CPU2006 license: 13

Test date: Apr-2011

Test sponsor: Intel Corporation

Hardware Availability: Feb-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

Peak Optimization Flags

C benchmarks:

400.perlbench: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
/F512000000 shlW32M.lib -link /FORCE:MULTIPLE

401.bzip2: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias
/F512000000

403.gcc: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

429.mcf: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch
/F512000000

445.gobmk: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O2 -Qprec-div- -Qansi-alias /F512000000

456.hmmr: -Qauto-ilp32 -QxSSE4.2(pass 2) -Qprof_gen(pass 1)
-Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch
/F512000000

458.sjeng: -Qauto-ilp32 -QxSSE4.2(pass 2) -Qprof_gen(pass 1)
-Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4
/F512000000

462.libquantum: -Qauto-ilp32 -QxSSE4.2 -Qipo -O3 -Qprec-div-
-Qopt-prefetch /F512000000

464.h264ref: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias /F512000000

C++ benchmarks:

471.omnetpp: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias
-Qopt-ra-region-strategy=block /F512000000 shlW32M.lib
-link /FORCE:MULTIPLE

473.astar: -Qauto-ilp32 -QxSSE4.2 -Qipo -O3 -Qprec-div-
-Qopt-prefetch /F512000000 shlW64M.lib
-link /FORCE:MULTIPLE

483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint_rate2006 = 195

Intel DX58SO2 Motherboard (Intel Core i7-990X)

SPECint_rate_base2006 = 179

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Apr-2011

Hardware Availability: Feb-2011

Software Availability: Apr-2011

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

456.hmmer: -link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

458.sjeng: -link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

462.libquantum: -link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

C++ benchmarks:

473.astar: -link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12-win32-revB.20110511.html>

<http://www.spec.org/cpu2006/flags/Intel-Windows-Platform-Settings.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12-win32-revB.20110511.xml>

<http://www.spec.org/cpu2006/flags/Intel-Windows-Platform-Settings.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 20:45:56 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 10 May 2011.