



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint®2006 = 36.1

NovaScale T810B F2 (Intel Core i3-2100, 3.10 GHz)

SPECint_base2006 = 34.1

CPU2006 license: 20


Test date: Mar-2011

Test sponsor: Bull SAS

Hardware Availability: May-2011

Tested by: Dell Inc.

Software Availability: Apr-2011

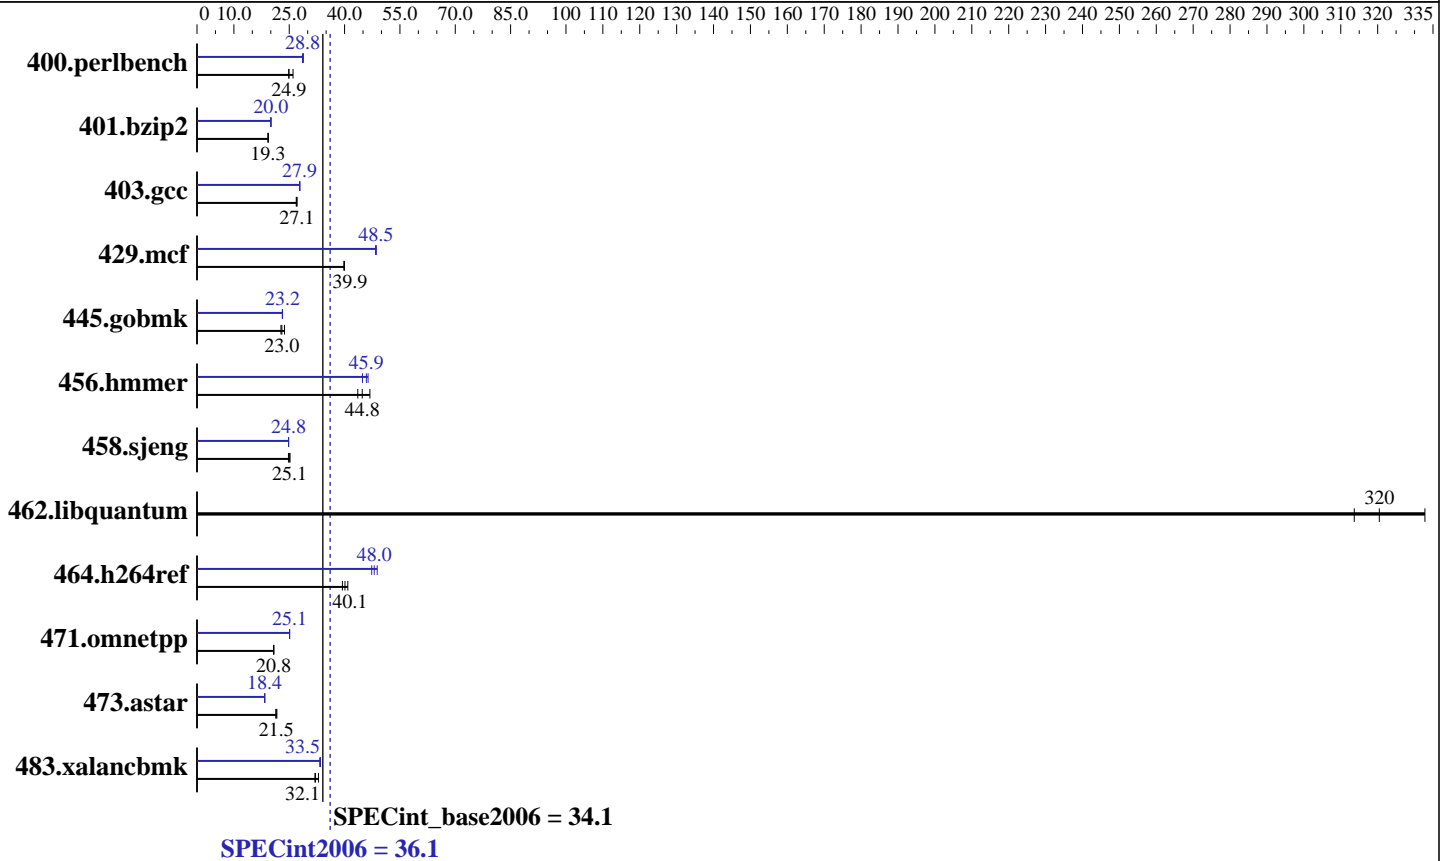

Hardware

CPU Name: Intel Core i3-2100
 CPU Characteristics:
 CPU MHz: 3100
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 3 MB I+D on chip per chip
 Other Cache: None
 Memory: 8 GB (4 x 2 GB 2Rx4 PC3-10600R-9, ECC)
 Disk Subsystem: 1 x 146 GB 15000 RPM SAS
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86_64), Kernel 2.6.32.12-0.7-default
 Compiler: Intel C++ Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.1.116 Build 20101116
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap 8.1 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint2006 = 36.1

NovaScale T810B F2 (Intel Core i3-2100, 3.10 GHz)

SPECint_base2006 = 34.1

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Dell Inc.

Test date: Mar-2011
Hardware Availability: May-2011
Software Availability: Apr-2011

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	375	26.0	393	24.9	392	24.9	342	28.6	339	28.8	339	28.8
401.bzip2	500	19.3	501	19.3	501	19.3	481	20.1	482	20.0	482	20.0
403.gcc	299	26.9	297	27.1	297	27.1	290	27.8	289	27.9	289	27.9
429.mcf	229	39.8	228	40.0	229	39.9	188	48.5	188	48.6	188	48.4
445.gobmk	442	23.7	461	22.8	456	23.0	454	23.1	453	23.2	452	23.2
456.hammer	199	46.9	214	43.6	208	44.8	208	44.9	201	46.4	203	45.9
458.sjeng	481	25.2	488	24.8	481	25.1	488	24.8	487	24.8	487	24.8
462.libquantum	62.3	333	64.7	320	66.1	314	62.3	333	64.7	320	66.1	314
464.h264ref	541	40.9	552	40.1	562	39.4	453	48.8	467	47.4	461	48.0
471.omnetpp	301	20.8	301	20.8	300	20.8	249	25.1	249	25.1	249	25.1
473.astar	327	21.5	328	21.4	324	21.6	384	18.3	382	18.4	383	18.4
483.xalancbmk	215	32.1	216	32.0	210	32.9	206	33.5	206	33.5	207	33.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

```
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 900> /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

Platform Notes

BIOS Settings:
Power Management = Maximum Performance (Default = Active Power Controller)
Logical Processor = Disabled (Default = Enabled)

General Notes

OMP_NUM_THREADS set to number of cores
The Dell PowerEdge T110 II and
the Bull NovaScale T810B F2 models are electronically equivalent.
The results have been measured on a Dell PowerEdge T110 II model
Binaries were compiled on RHEL5.5

Base Compiler Invocation

C benchmarks:
icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint2006 = 36.1

NovaScale T810B F2 (Intel Core i3-2100, 3.10 GHz)

SPECint_base2006 = 34.1

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Dell Inc.

Test date: Mar-2011
Hardware Availability: May-2011
Software Availability: Apr-2011

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

C++ benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/smartheap -lsmartheap64
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m64
400.perlbench: icc -m32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint2006 = 36.1

NovaScale T810B F2 (Intel Core i3-2100, 3.10 GHz)

SPECint_base2006 = 34.1

CPU2006 license: 20

Test date: Mar-2011

Test sponsor: Bull SAS

Hardware Availability: May-2011

Tested by: Dell Inc.

Software Availability: Apr-2011

Peak Compiler Invocation (Continued)

429.mcf: `icc -m32`

445.gobmk: `icc -m32`

464.h264ref: `icc -m32`

C++ benchmarks (except as noted below):

`icpc -m32`

473.astar: `icpc -m64`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`

401.bzip2: `-DSPEC_CPU_LP64`

403.gcc: `-DSPEC_CPU_LP64`

456.hammer: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

473.astar: `-DSPEC_CPU_LP64`

483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -ansi-alias -B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT`

401.bzip2: `-xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32 -opt-prefetch -ansi-alias`

403.gcc: `-xAVX -ipo -O3 -no-prec-div -inline-calloc -opt-malloc-options=3 -auto-ilp32 -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT`

429.mcf: `-xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32 -ansi-alias -B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT`

445.gobmk: `-xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -auto-ilp32 -ansi-alias -B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT`

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint2006 = 36.1

NovaScale T810B F2 (Intel Core i3-2100, 3.10 GHz)

SPECint_base2006 = 34.1

CPU2006 license: 20

Test date: Mar-2011

Test sponsor: Bull SAS

Hardware Availability: May-2011

Tested by: Dell Inc.

Software Availability: Apr-2011

Peak Optimization Flags (Continued)

456.hmmmer: -xAVX -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

C++ benchmarks:

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias -Wl,-z,muldefs
-L/smartheap -lsmartheap
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

473.astar: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=routine -Wl,-z,muldefs
-L/smartheap -lsmartheap64

483.xalancbmk: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
-Wl,-z,muldefs -L/smartheap -lsmartheap
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110524.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110524.00.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint2006 = 36.1

NovaScale T810B F2 (Intel Core i3-2100, 3.10 GHz)

SPECint_base2006 = 34.1

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Mar-2011

Hardware Availability: May-2011

Software Availability: Apr-2011

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 18:02:08 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 7 June 2011.