



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECfp®\_rate2006 = 113

NovaScale T840 F2 (Intel Xeon E5603, 1.60 GHz)

SPECfp\_rate\_base2006 = 107

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Jun-2011

Hardware Availability: Feb-2011

Software Availability: Jan-2011

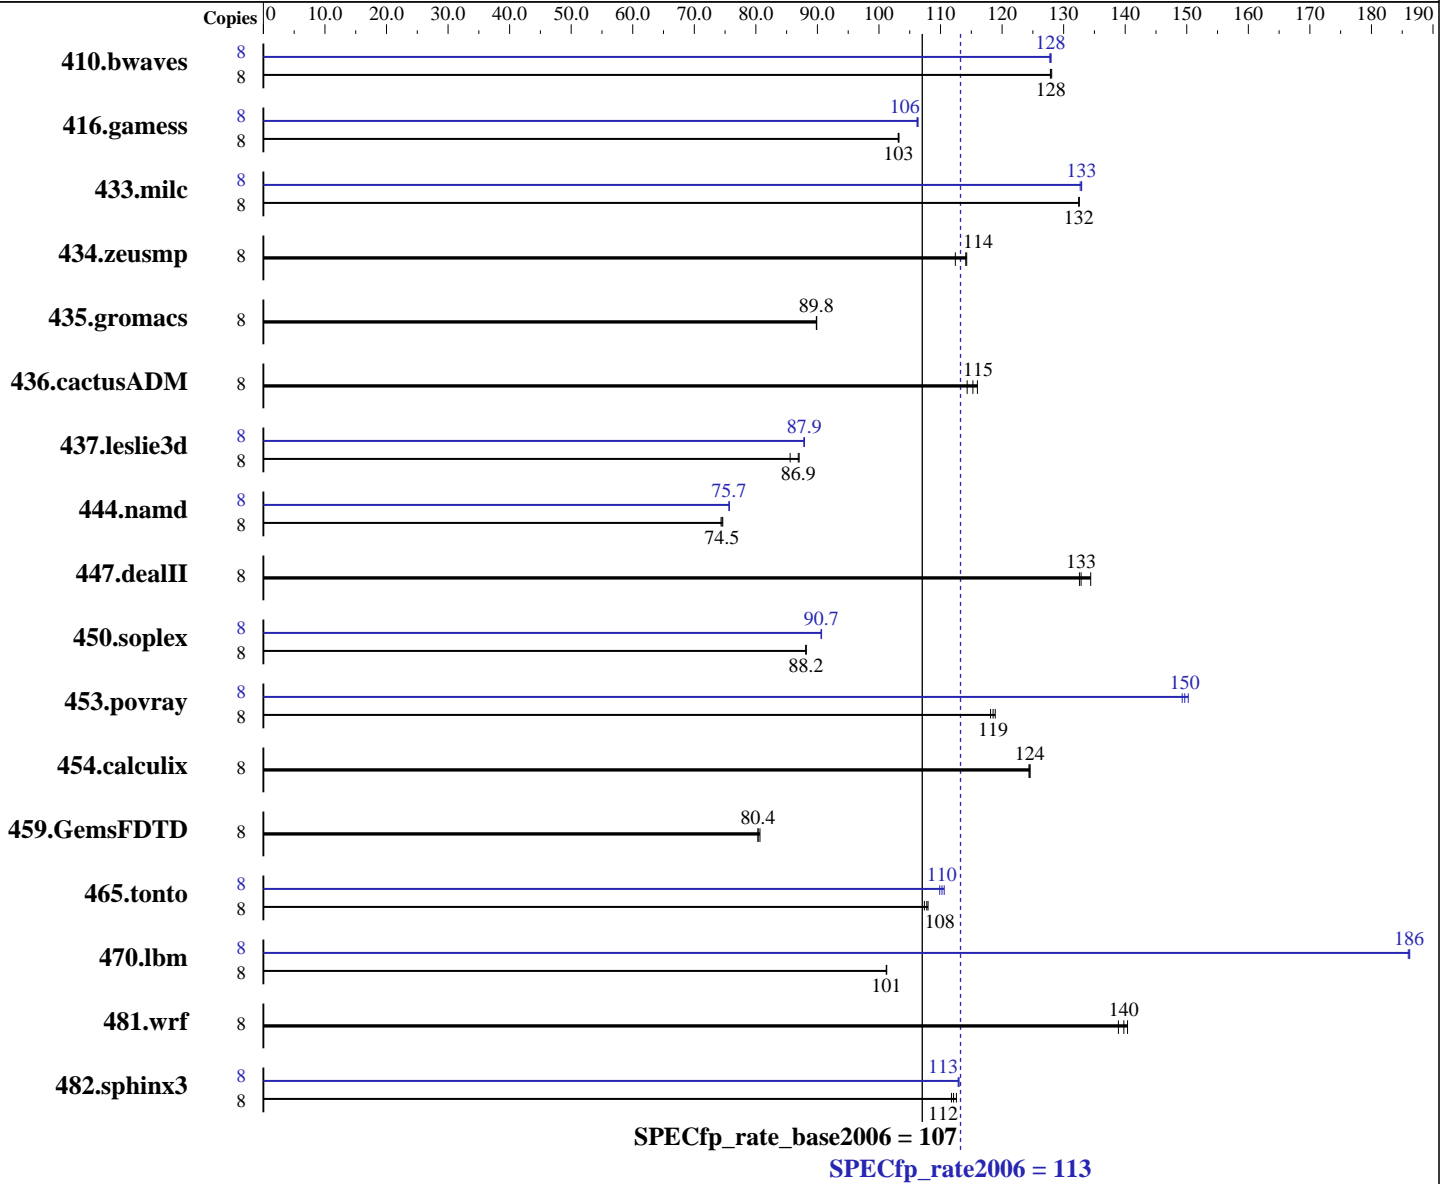

### Hardware

CPU Name: Intel Xeon E5603  
 CPU Characteristics:  
 CPU MHz: 1600  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 SP1 (x86\_64), Kernel 2.6.32.12-0.7-default  
 Compiler: Intel C++ and Fortran Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.1.116 Build 20101116  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECfp\_rate2006 = 113

NovaScale T840 F2 (Intel Xeon E5603, 1.60 GHz)

SPECfp\_rate\_base2006 = 107

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Jun-2011

Hardware Availability: Feb-2011

Software Availability: Jan-2011

L3 Cache: 4 MB I+D on chip per chip  
Other Cache: None  
Memory: 48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC, running at 1066 MHz)  
Disk Subsystem: 1 x 146 GB 15000 RPM SAS  
Other Hardware: None

Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	<b>850</b>	<b>128</b>	850	128	849	128	8	851	128	850	128	<b>850</b>	<b>128</b>
416.gamess	8	1517	103	1519	103	<b>1518</b>	<b>103</b>	8	1475	106	<b>1474</b>	<b>106</b>	1473	106
433.milc	8	554	133	554	132	<b>554</b>	<b>132</b>	8	552	133	553	133	<b>553</b>	<b>133</b>
434.zeusmp	8	637	114	648	112	<b>638</b>	<b>114</b>	8	637	114	648	112	<b>638</b>	<b>114</b>
435.gromacs	8	635	89.9	636	89.8	<b>636</b>	<b>89.8</b>	8	635	89.9	636	89.8	<b>636</b>	<b>89.8</b>
436.cactusADM	8	<b>829</b>	<b>115</b>	824	116	836	114	8	<b>829</b>	<b>115</b>	824	116	836	114
437.leslie3d	8	<b>865</b>	<b>86.9</b>	879	85.6	864	87.0	8	856	87.9	856	87.8	<b>856</b>	<b>87.9</b>
444.namd	8	863	74.3	<b>861</b>	<b>74.5</b>	860	74.6	8	848	75.7	<b>848</b>	<b>75.7</b>	848	75.6
447.dealII	8	690	133	681	134	<b>689</b>	<b>133</b>	8	690	133	681	134	<b>689</b>	<b>133</b>
450.soplex	8	<b>757</b>	<b>88.2</b>	757	88.1	757	88.2	8	736	90.6	<b>736</b>	<b>90.7</b>	736	90.7
453.povray	8	358	119	<b>359</b>	<b>119</b>	360	118	8	285	149	283	150	<b>284</b>	<b>150</b>
454.calculix	8	530	125	<b>530</b>	<b>124</b>	531	124	8	530	125	<b>530</b>	<b>124</b>	531	124
459.GemsFDTD	8	<b>1056</b>	<b>80.4</b>	1052	80.7	1056	80.4	8	<b>1056</b>	<b>80.4</b>	1052	80.7	1056	80.4
465.tonto	8	<b>730</b>	<b>108</b>	729	108	733	107	8	716	110	712	111	<b>714</b>	<b>110</b>
470.lbm	8	1085	101	<b>1086</b>	<b>101</b>	1086	101	8	<b>591</b>	<b>186</b>	591	186	590	186
481.wrf	8	643	139	637	140	<b>639</b>	<b>140</b>	8	643	139	637	140	<b>639</b>	<b>140</b>
482.sphinx3	8	1395	112	<b>1391</b>	<b>112</b>	1385	113	8	1382	113	1380	113	<b>1380</b>	<b>113</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages  
echo 3600 > /proc/sys/vm/nr\_hugepages  
export HUGETLB\_MORECORE=yes  
export LD\_PRELOAD=/usr/lib64/libhugetlbfs.so



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECfp\_rate2006 = 113

NovaScale T840 F2 (Intel Xeon E5603, 1.60 GHz)

SPECfp\_rate\_base2006 = 107

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Dell Inc.

Test date: Jun-2011  
Hardware Availability: Feb-2011  
Software Availability: Jan-2011

### Platform Notes

BIOS Settings:  
Power Management = Maximum Performance (Default = Active Power Controller)  
Data Reuse = Disabled (Default = Enabled)

### General Notes

The Dell PowerEdge T610 and the Bull NovaScale T840 F2 models are electronically equivalent. The results have been measured on a Dell PowerEdge T610 model. Binaries were compiled on RHEL5.5

### Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

### Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECfp\_rate2006 = 113

NovaScale T840 F2 (Intel Xeon E5603, 1.60 GHz)

SPECfp\_rate\_base2006 = 107

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Dell Inc.

Test date: Jun-2011  
Hardware Availability: Feb-2011  
Software Availability: Jan-2011

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

Fortran benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -ansi-alias

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):  
icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECfp\_rate2006 = 113

NovaScale T840 F2 (Intel Xeon E5603, 1.60 GHz)

SPECfp\_rate\_base2006 = 107

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Jun-2011

Hardware Availability: Feb-2011

Software Availability: Jan-2011

## Peak Portability Flags (Continued)

470.lbm: -DSPEC\_CPU\_LP64

481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3  
-ansi-alias -opt-prefetch -static -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

Fortran benchmarks:

410.bwaves: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div  
-B /usr/share/libhugetlbfs/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfs-link=BDT

459.GemsFDTD: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

**SPECfp\_rate2006 = 113**

NovaScale T840 F2 (Intel Xeon E5603, 1.60 GHz)

**SPECfp\_rate\_base2006 = 107**

**CPU2006 license:** 20

**Test sponsor:** Bull SAS

**Tested by:** Dell Inc.

**Test date:** Jun-2011

**Hardware Availability:** Feb-2011

**Software Availability:** Jan-2011

## Peak Optimization Flags (Continued)

```
465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-alloc -opt-malloc-options=3
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT
```

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110524.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110524.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 23:08:52 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 16 August 2011.