



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM BladeCenter HS23E  
(Intel Xeon E5-2430L, 2.00 GHz)

SPECfp<sup>®</sup>\_rate2006 = 300

SPECfp\_rate\_base2006 = 292

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: May-2012

Hardware Availability: Jun-2012

Software Availability: Dec-2011

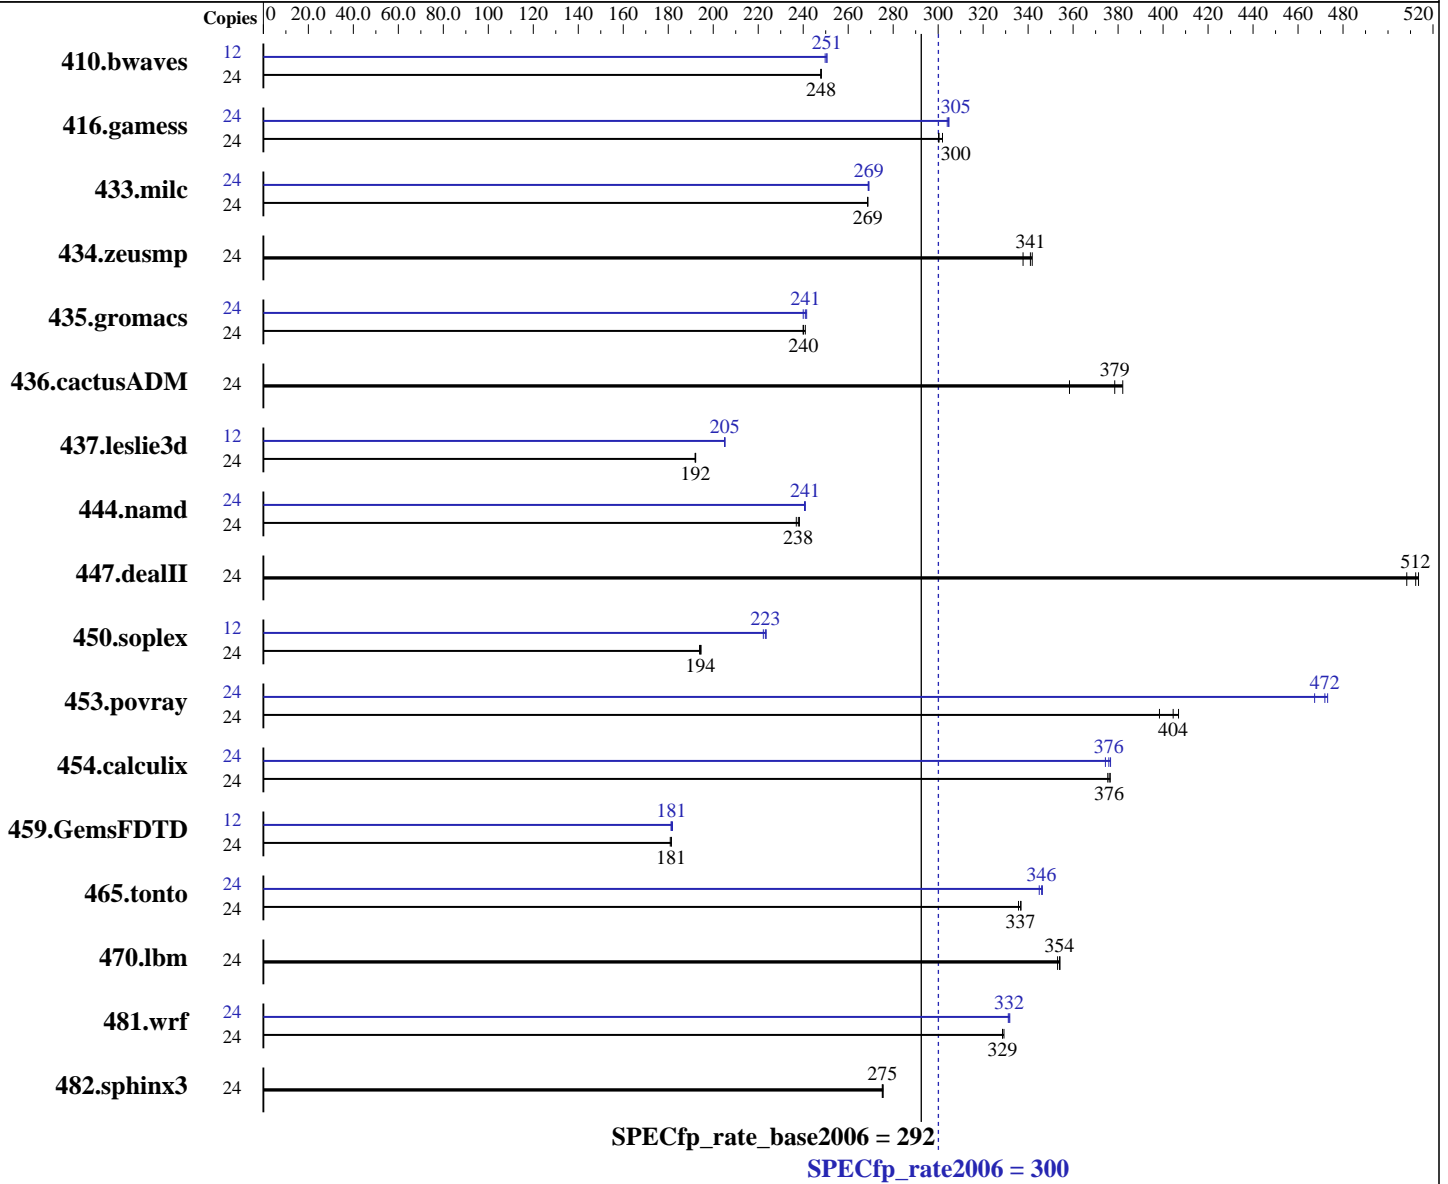

### Hardware

CPU Name: Intel Xeon E5-2430L  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.50 GHz  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM BladeCenter HS23E  
(Intel Xeon E5-2430L, 2.00 GHz)

SPECfp\_rate2006 = 300

SPECfp\_rate\_base2006 = 292

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: May-2012

Hardware Availability: Jun-2012

Software Availability: Dec-2011

L3 Cache: 15 MB I+D on chip per chip  
Other Cache: None  
Memory: 96 GB (12 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz)  
Disk Subsystem: 1 x 300 GB SAS, 10000 RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	24	1315	248	1316	248	<b>1316</b>	<b>248</b>	12	<b>651</b>	<b>251</b>	651	251	653	250		
416.gamess	24	<b>1564</b>	<b>300</b>	1566	300	1556	302	24	1546	304	1542	305	<b>1542</b>	<b>305</b>		
433.milc	24	<b>820</b>	<b>269</b>	820	269	820	269	24	819	269	<b>819</b>	<b>269</b>	819	269		
434.zeusmp	24	<b>640</b>	<b>341</b>	647	338	639	342	24	<b>640</b>	<b>341</b>	647	338	639	342		
435.gromacs	24	711	241	714	240	<b>714</b>	<b>240</b>	24	714	240	<b>711</b>	<b>241</b>	709	242		
436.cactusADM	24	<b>758</b>	<b>379</b>	800	358	751	382	24	<b>758</b>	<b>379</b>	800	358	751	382		
437.leslie3d	24	1174	192	1175	192	<b>1174</b>	<b>192</b>	12	<b>550</b>	<b>205</b>	550	205	550	205		
444.namd	24	808	238	812	237	<b>809</b>	<b>238</b>	24	800	241	799	241	<b>799</b>	<b>241</b>		
447.dealII	24	540	508	<b>536</b>	<b>512</b>	535	514	24	540	508	<b>536</b>	<b>512</b>	535	514		
450.soplex	24	1032	194	1029	195	<b>1030</b>	<b>194</b>	12	450	222	448	224	<b>448</b>	<b>223</b>		
453.povray	24	<b>316</b>	<b>404</b>	314	407	320	398	24	270	473	273	467	<b>271</b>	<b>472</b>		
454.calculix	24	527	375	<b>527</b>	<b>376</b>	526	377	24	526	377	529	374	<b>527</b>	<b>376</b>		
459.GemsFDTD	24	1404	181	<b>1404</b>	<b>181</b>	1408	181	12	702	181	700	182	<b>702</b>	<b>181</b>		
465.tonto	24	<b>701</b>	<b>337</b>	701	337	703	336	24	682	346	<b>683</b>	<b>346</b>	685	345		
470.lbm	24	<b>932</b>	<b>354</b>	931	354	934	353	24	<b>932</b>	<b>354</b>	931	354	934	353		
481.wrf	24	814	329	<b>816</b>	<b>329</b>	816	329	24	<b>809</b>	<b>332</b>	808	332	809	331		
482.sphinx3	24	1700	275	1698	276	<b>1699</b>	<b>275</b>	24	1700	275	1698	276	<b>1699</b>	<b>275</b>		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Operating Mode set to Maximum Performance in BIOS  
Sysinfo program /cpu2006.1.2/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date:: 2011-10-11 # \$ 6f2ebdff5032aaa42e583f96b07f99d3  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM BladeCenter HS23E  
(Intel Xeon E5-2430L, 2.00 GHz)

**SPECfp\_rate2006 = 300**

**SPECfp\_rate\_base2006 = 292**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** May-2012  
**Hardware Availability:** Jun-2012  
**Software Availability:** Dec-2011

## Platform Notes (Continued)

running on angleshark-pete Wed May 30 12:14:37 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2430L 0 @ 2.00GHz
 2 "physical id"s (chips)
 24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 6
  siblings  : 12
  physical 0: cores 0 1 2 3 4 5
  physical 1: cores 0 1 2 3 4 5
cache size : 15360 KB
```

```
From /proc/meminfo
MemTotal:      99042356 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux angleshark-pete 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST
2011 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 May 29 18:32
```

```
SPEC is set to: /cpu2006.1.2
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/vg_anglesharkpet-lv_root
                ext4      265G  36G  217G  14% /
```

```
Additional information from dmidecode:
Memory:
6x Micron 36JDYS1G72PZ-1G6M1 8 GB 1600 MHz 2 rank
6x Samsung M392B1K70DM0-CK0 8 GB 1600 MHz 2 rank
```

(End of data from sysinfo program)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM BladeCenter HS23E  
(Intel Xeon E5-2430L, 2.00 GHz)

**SPECfp\_rate2006 = 300**

**SPECfp\_rate\_base2006 = 292**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** May-2012  
**Hardware Availability:** Jun-2012  
**Software Availability:** Dec-2011

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.deallI: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM BladeCenter HS23E  
(Intel Xeon E5-2430L, 2.00 GHz)

**SPECfp\_rate2006 = 300**

**SPECfp\_rate\_base2006 = 292**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** May-2012

**Hardware Availability:** Jun-2012

**Software Availability:** Dec-2011

## Base Optimization Flags

C benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3`

C++ benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3`

Fortran benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch`

Benchmarks using both Fortran and C:

`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3`

## Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks (except as noted below):

`icpc -m64`

`450.soplex: icpc -m32`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`  
416.gamess: `-DSPEC_CPU_LP64`  
433.milc: `-DSPEC_CPU_LP64`  
434.zeusmp: `-DSPEC_CPU_LP64`  
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`  
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`  
437.leslie3d: `-DSPEC_CPU_LP64`  
444.namd: `-DSPEC_CPU_LP64`  
447.dealII: `-DSPEC_CPU_LP64`  
453.povray: `-DSPEC_CPU_LP64`  
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`  
465.tonto: `-DSPEC_CPU_LP64`

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM BladeCenter HS23E  
(Intel Xeon E5-2430L, 2.00 GHz)

**SPECfp\_rate2006 = 300**

**SPECfp\_rate\_base2006 = 292**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** May-2012

**Hardware Availability:** Jun-2012

**Software Availability:** Dec-2011

## Peak Portability Flags (Continued)

470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-opt-mem-layout-trans=3

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM BladeCenter HS23E  
(Intel Xeon E5-2430L, 2.00 GHz)

**SPECfp\_rate2006 = 300**

**SPECfp\_rate\_base2006 = 292**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** May-2012

**Hardware Availability:** Jun-2012

**Software Availability:** Dec-2011

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch  
-static -auto-ilp32 -opt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32  
-opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 08:33:21 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 19 June 2012.

Standard Performance Evaluation Corporation

[info@spec.org](mailto:info@spec.org)

<http://www.spec.org/>