



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

**SPECint®\_rate2006 = 1090**

PRIMERGY RX500 S7, Intel Xeon E5-4640, 2.40 GHz

**SPECint\_rate\_base2006 = 1050**

CPU2006 license: 19


Test date: Jul-2012

Test sponsor: Fujitsu

Hardware Availability: Jul-2012

Tested by: Fujitsu

Software Availability: Feb-2012

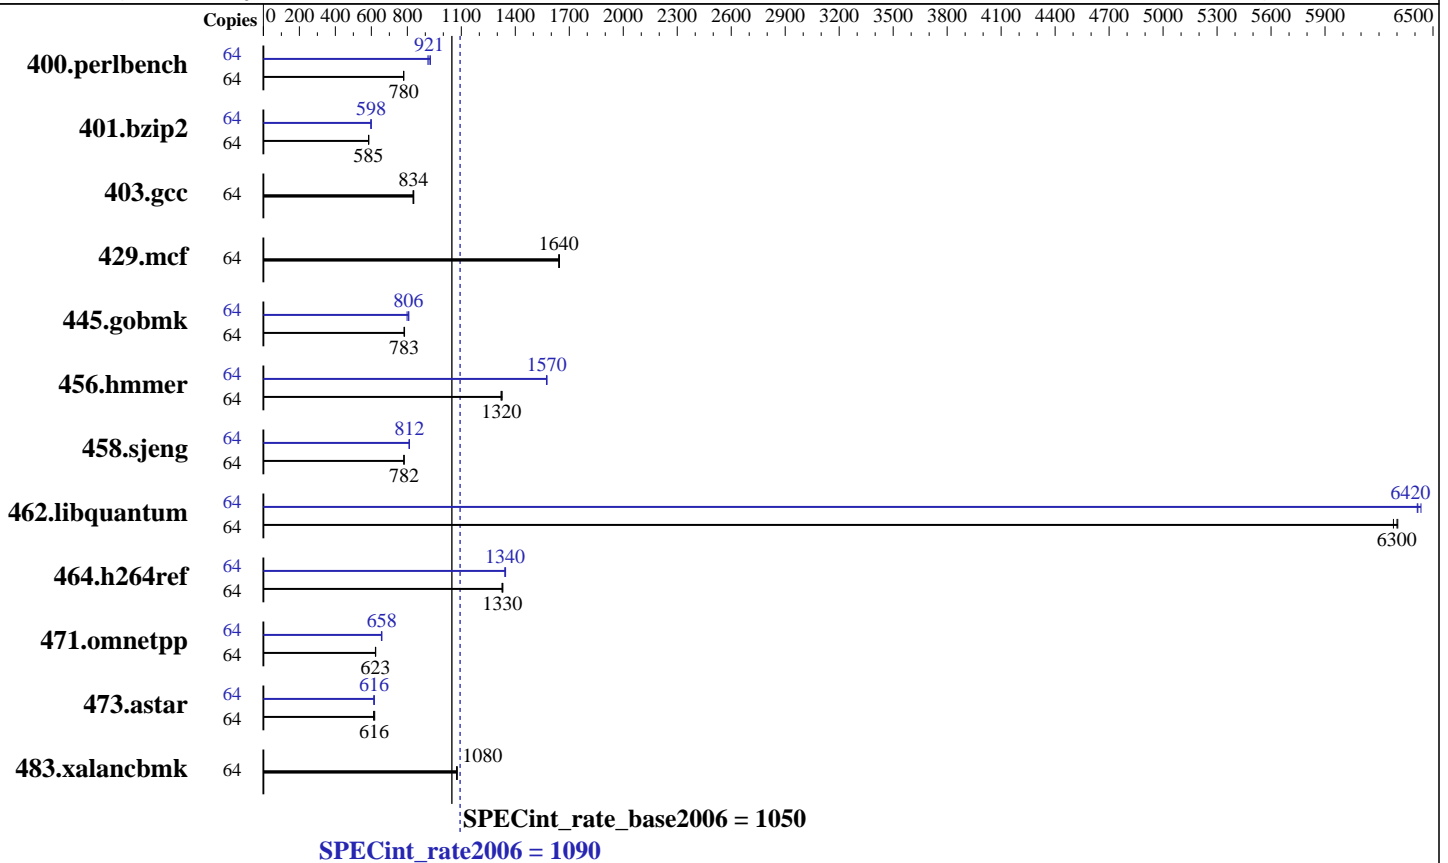

### Hardware

CPU Name: Intel Xeon E5-4640  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (32 x 8 GB 2Rx4 PC3L-12800R-11, ECC)  
 Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.293 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECint\_rate2006 = 1090

PRIMERGY RX500 S7, Intel Xeon E5-4640, 2.40 GHz

SPECint\_rate\_base2006 = 1050

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Jul-2012  
Hardware Availability: Jul-2012  
Software Availability: Feb-2012

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	<b>802</b>	<b>780</b>	803	779	801	780	64	684	914	<b>679</b>	<b>921</b>	673	928
401.bzip2	64	1056	585	1055	585	<b>1056</b>	<b>585</b>	64	1030	599	<b>1033</b>	<b>598</b>	1034	598
403.gcc	64	<b>618</b>	<b>834</b>	616	836	619	832	64	<b>618</b>	<b>834</b>	616	836	619	832
429.mcf	64	<b>355</b>	<b>1640</b>	355	1640	355	1650	64	<b>355</b>	<b>1640</b>	355	1640	355	1650
445.gobmk	64	858	782	856	785	<b>858</b>	<b>783</b>	64	830	809	<b>833</b>	<b>806</b>	841	799
456.hammer	64	450	1330	452	1320	<b>451</b>	<b>1320</b>	64	379	1580	<b>379</b>	<b>1570</b>	380	1570
458.sjeng	64	<b>991</b>	<b>782</b>	992	781	990	782	64	954	812	957	809	<b>954</b>	<b>812</b>
462.libquantum	64	211	6280	<b>210</b>	<b>6300</b>	210	6300	64	<b>207</b>	<b>6420</b>	207	6410	206	6430
464.h264ref	64	1064	1330	<b>1066</b>	<b>1330</b>	1068	1330	64	1055	1340	1052	1350	<b>1054</b>	<b>1340</b>
471.omnetpp	64	642	623	641	624	<b>642</b>	<b>623</b>	64	<b>608</b>	<b>658</b>	608	658	610	656
473.astar	64	<b>730</b>	<b>616</b>	726	619	734	612	64	732	614	729	616	<b>730</b>	<b>616</b>
483.xalancbmk	64	<b>411</b>	<b>1080</b>	410	1080	411	1070	64	<b>411</b>	<b>1080</b>	410	1080	411	1070

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/SPECcpu2006/libs/32:/SPECcpu2006/libs/64"

Binaries compiled on a system with 2x E5-2650 CPU + 96 GB memory using RHEL6.2  
For information about Fujitsu please visit: <http://www.fujitsu.com>

## Base Compiler Invocation

C benchmarks:  
icc -m32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECint\_rate2006 = 1090**

PRIMERGY RX500 S7, Intel Xeon E5-4640, 2.40 GHz

**SPECint\_rate\_base2006 = 1050**

**CPU2006 license:** 19  
**Test sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test date:** Jul-2012  
**Hardware Availability:** Jul-2012  
**Software Availability:** Feb-2012

## Base Compiler Invocation (Continued)

C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/opt/SmartHeap/lib -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32  
400.perlbench: icc -m64  
401.bzip2: icc -m64  
456.hmmer: icc -m64  
458.sjeng: icc -m64  
C++ benchmarks:  
icpc -m32



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint\_rate2006 = 1090

PRIMERGY RX500 S7, Intel Xeon E5-4640, 2.40 GHz

SPECint\_rate\_base2006 = 1050

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Jul-2012  
Hardware Availability: Jul-2012  
Software Availability: Feb-2012

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32  
401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias  
403.gcc: basepeak = yes  
429.mcf: basepeak = yes  
445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3  
456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32  
462.libquantum: -xAVX -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3  
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/opt/SmartHeap/lib -lsmarheap  
473.astar: -xAVX -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs  
-L/opt/SmartHeap/lib -lsmarheap

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECint\_rate2006 = 1090**

PRIMERGY RX500 S7, Intel Xeon E5-4640, 2.40 GHz

**SPECint\_rate\_base2006 = 1050**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Jul-2012

**Hardware Availability:** Jul-2012

**Software Availability:** Feb-2012

## Peak Optimization Flags (Continued)

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120320.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120320.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 11:57:10 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 14 August 2012.