



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp®2006 = 42.8

Express5800/E110d-M (Intel Pentium 1403)

SPECfp_base2006 = 41.8

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Dec-2012

Hardware Availability: Dec-2012

Software Availability: Feb-2012

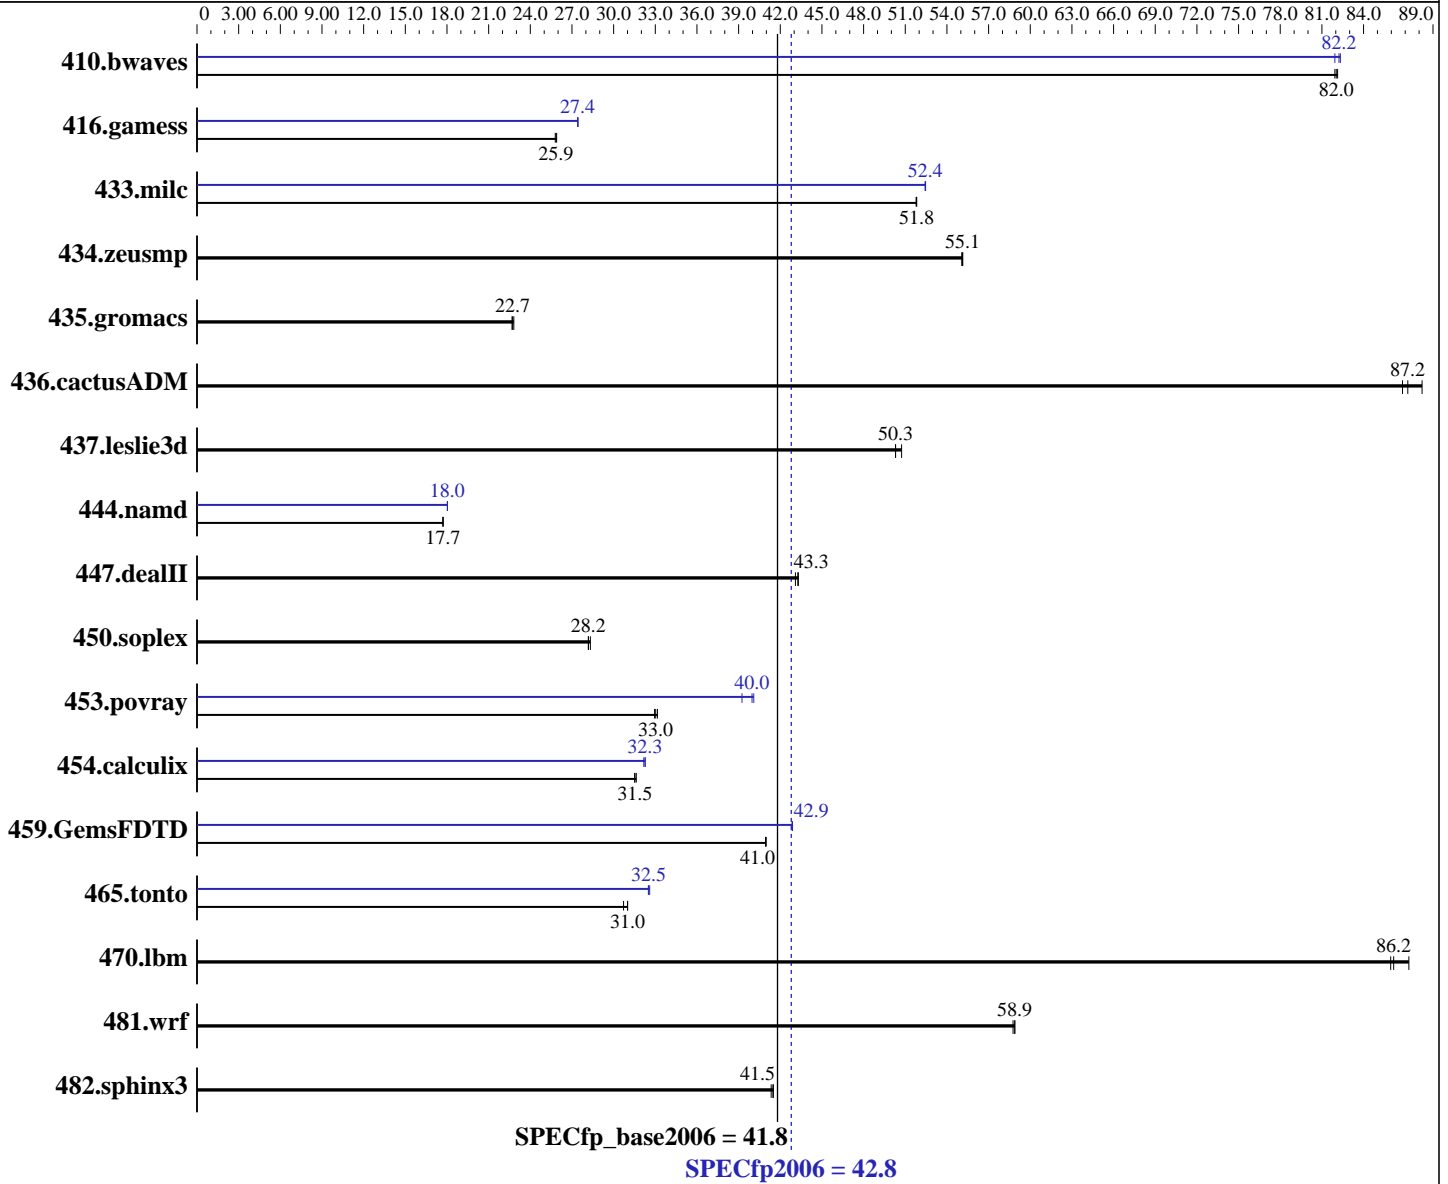

Hardware

CPU Name: Intel Pentium 1403
 CPU Characteristics:
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)
 Kernel 2.6.32-220.el6.x86_64
 Compiler: C/C++: Version 12.1.3.293 of Intel C++ Studio XE for Linux;
 Fortran: Version 12.1.3.293 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = **42.8**

Express5800/E110d-M (Intel Pentium 1403)

SPECfp_base2006 = **41.8**

CPU2006 license: 9006

Test date: Dec-2012

Test sponsor: NEC Corporation

Hardware Availability: Dec-2012

Tested by: NEC Corporation

Software Availability: Feb-2012

L3 Cache: 5 MB I+D on chip per chip
 Other Cache: None
 Memory: 48 GB (6 x 8 GB 2Rx4 PC3L-12800R-11, ECC, running at 1066 MHz and CL7)
 Disk Subsystem: 1 x 250 GB SATA, 7200 RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	166	81.9	165	82.1	166	82.0	165	82.3	166	81.9	165	82.2
416.gamess	759	25.8	756	25.9	757	25.9	714	27.4	714	27.4	714	27.4
433.milc	177	51.8	177	51.8	177	51.8	175	52.4	175	52.4	175	52.5
434.zeusmp	165	55.1	165	55.1	165	55.1	165	55.1	165	55.1	165	55.1
435.gromacs	315	22.7	314	22.7	313	22.8	315	22.7	314	22.7	313	22.8
436.cactusADM	137	87.2	138	86.8	135	88.2	137	87.2	138	86.8	135	88.2
437.leslie3d	187	50.3	185	50.7	187	50.3	187	50.3	185	50.7	187	50.3
444.namd	453	17.7	453	17.7	453	17.7	445	18.0	445	18.0	445	18.0
447.dealII	264	43.3	265	43.1	264	43.3	264	43.3	265	43.1	264	43.3
450.soplex	296	28.2	294	28.3	296	28.2	296	28.2	294	28.3	296	28.2
453.povray	160	33.2	161	32.9	161	33.0	136	39.2	133	40.1	133	40.0
454.calculix	261	31.6	262	31.5	262	31.5	256	32.2	256	32.3	256	32.3
459.GemsFDTD	259	41.0	259	41.0	259	40.9	248	42.8	247	42.9	247	42.9
465.tonto	317	31.0	320	30.7	317	31.0	302	32.6	303	32.5	303	32.5
470.lbm	159	86.2	157	87.3	160	86.0	159	86.2	157	87.3	160	86.0
481.wrf	190	58.9	190	58.8	190	58.9	190	58.9	190	58.8	190	58.9
482.sphinx3	470	41.5	470	41.5	471	41.3	470	41.5	470	41.5	471	41.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:
Energy Performance: Performance

General Notes

Environment variables set by runspec before the start of the run:
 KMP_AFFINITY = "granularity=fine,compact,1,0"
 LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64"
 OMP_NUM_THREADS = "2"

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 42.8

Express5800/E110d-M (Intel Pentium 1403)

SPECfp_base2006 = 41.8

CPU2006 license: 9006

Test date: Dec-2012

Test sponsor: NEC Corporation

Hardware Availability: Dec-2012

Tested by: NEC Corporation

Software Availability: Feb-2012

General Notes (Continued)

Added glibc-static-2.12-1.47.el6.x86_64.rpm
to enable static linking

Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 42.8

Express5800/E110d-M (Intel Pentium 1403)

SPECfp_base2006 = 41.8

CPU2006 license: 9006

Test date: Dec-2012

Test sponsor: NEC Corporation

Hardware Availability: Dec-2012

Tested by: NEC Corporation

Software Availability: Feb-2012

Base Optimization Flags (Continued)

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 42.8

Express5800/E110d-M (Intel Pentium 1403)

SPECfp_base2006 = 41.8

CPU2006 license: 9006

Test date: Dec-2012

Test sponsor: NEC Corporation

Hardware Availability: Dec-2012

Tested by: NEC Corporation

Software Availability: Feb-2012

Peak Optimization Flags (Continued)

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel
-static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 42.8

Express5800/E110d-M (Intel Pentium 1403)

SPECfp_base2006 = 41.8

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Dec-2012

Hardware Availability: Dec-2012

Software Availability: Feb-2012

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 15:42:32 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 9 April 2013.