



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp<sup>®</sup>\_rate2006 = **674**

PRIMERGY CX250 S2, Intel Xeon E5-2695 v2, 2.40 GHz

SPECfp\_rate\_base2006 = **656**

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Nov-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

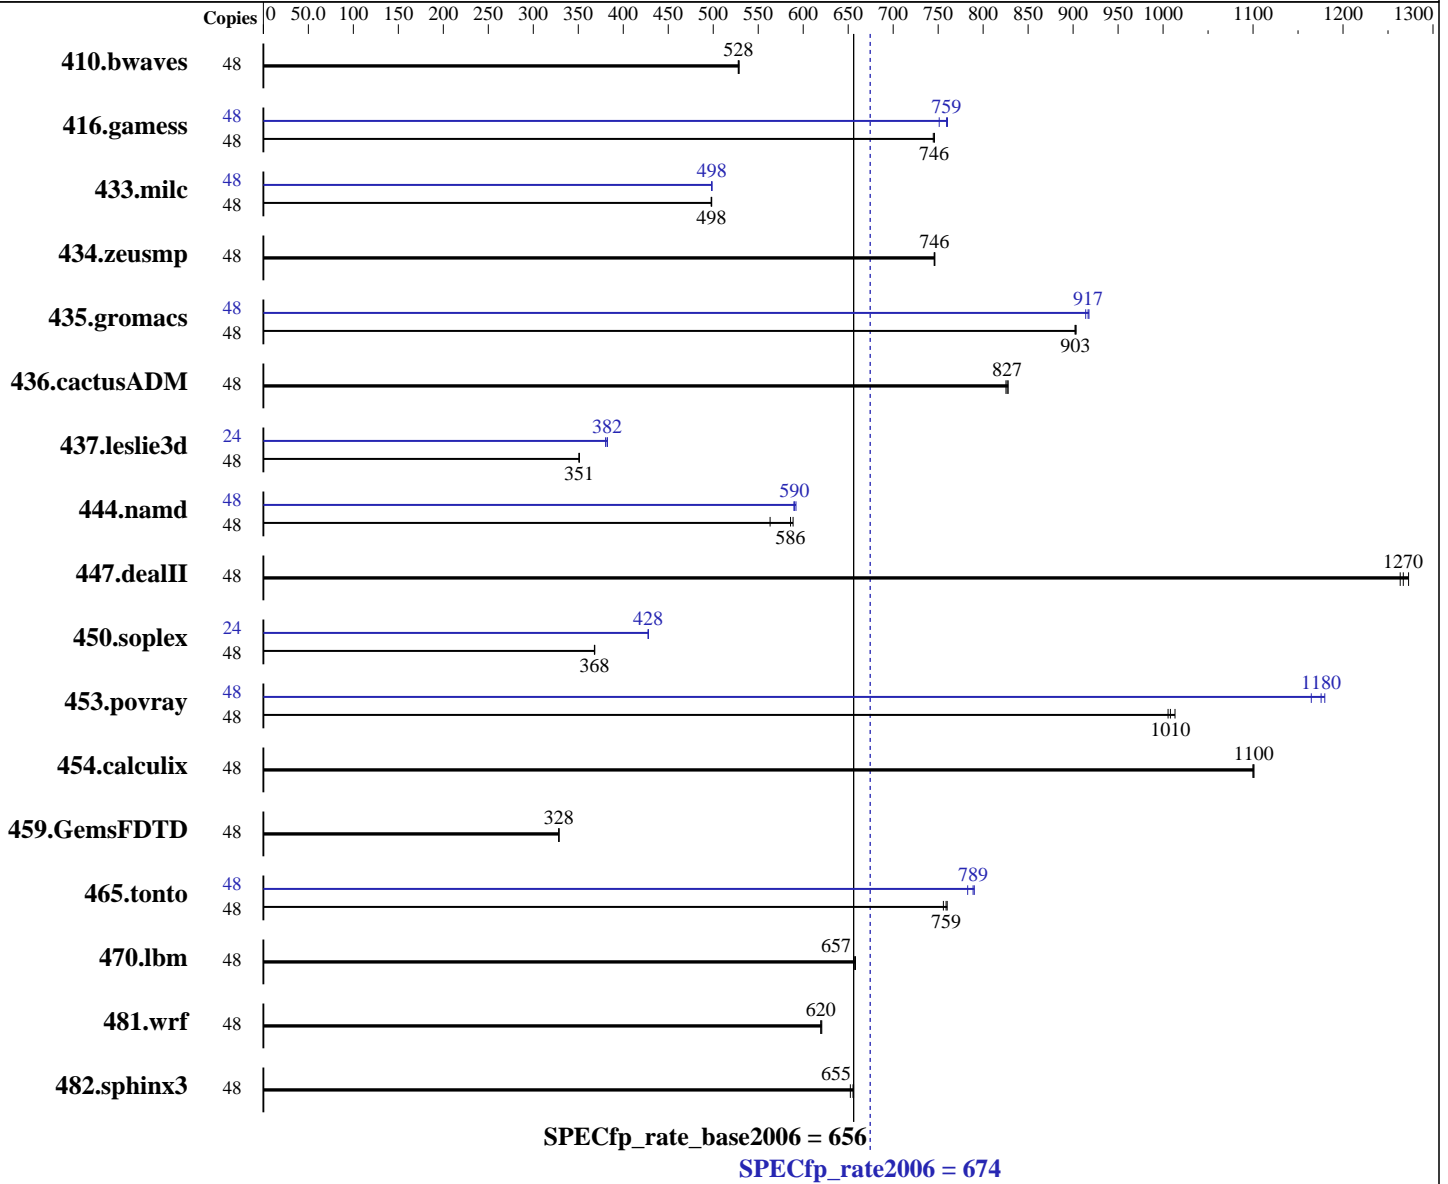

### Hardware

CPU Name: Intel Xeon E5-2695 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
 2.6.32-358.11.1.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp\_rate2006 = **674**

PRIMERGY CX250 S2, Intel Xeon E5-2695 v2, 2.40 GHz

SPECfp\_rate\_base2006 = **656**

CPU2006 license: 19

Test date: Nov-2013

Test sponsor: Fujitsu

Hardware Availability: Sep-2013

Tested by: Fujitsu

Software Availability: Sep-2013

L3 Cache: 30 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC)  
 Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM  
 Other Hardware: None

System State: Run level 5 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	48	1233	529	1236	528	<b>1236</b>	<b>528</b>	48	1233	529	1236	528	<b>1236</b>	<b>528</b>
416.gamess	48	1260	746	<b>1260</b>	<b>746</b>	1262	745	48	1251	751	1236	760	<b>1238</b>	<b>759</b>
433.milc	48	884	498	885	498	<b>885</b>	<b>498</b>	48	884	499	<b>884</b>	<b>498</b>	884	498
434.zeusmp	48	585	746	586	746	<b>585</b>	<b>746</b>	48	585	746	586	746	<b>585</b>	<b>746</b>
435.gromacs	48	380	902	379	903	<b>380</b>	<b>903</b>	48	373	918	<b>374</b>	<b>917</b>	375	914
436.cactusADM	48	693	828	<b>694</b>	<b>827</b>	695	825	48	693	828	<b>694</b>	<b>827</b>	695	825
437.leslie3d	48	1285	351	<b>1285</b>	<b>351</b>	1286	351	24	590	382	593	380	<b>590</b>	<b>382</b>
444.namd	48	654	589	<b>657</b>	<b>586</b>	684	563	48	<b>652</b>	<b>590</b>	650	592	653	590
447.dealII	48	<b>433</b>	<b>1270</b>	435	1260	431	1270	48	<b>433</b>	<b>1270</b>	435	1260	431	1270
450.soplex	48	<b>1087</b>	<b>368</b>	1088	368	1087	368	24	<b>468</b>	<b>428</b>	468	428	468	428
453.povray	48	254	1010	252	1010	<b>253</b>	<b>1010</b>	48	219	1160	<b>217</b>	<b>1180</b>	216	1180
454.calculix	48	<b>360</b>	<b>1100</b>	360	1100	360	1100	48	<b>360</b>	<b>1100</b>	360	1100	360	1100
459.GemsFDTD	48	1551	328	<b>1550</b>	<b>328</b>	1550	329	48	1551	328	<b>1550</b>	<b>328</b>	1550	329
465.tonto	48	<b>622</b>	<b>759</b>	621	760	625	756	48	598	790	603	783	<b>599</b>	<b>789</b>
470.lbm	48	<b>1003</b>	<b>657</b>	1002	658	1003	657	48	<b>1003</b>	<b>657</b>	1002	658	1003	657
481.wrf	48	864	621	865	620	<b>865</b>	<b>620</b>	48	864	621	865	620	<b>865</b>	<b>620</b>
482.sphinx3	48	<b>1428</b>	<b>655</b>	1434	652	1426	656	48	<b>1428</b>	<b>655</b>	1434	652	1426	656

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:  
Energy Performance = Performance



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp\_rate2006 = 674**

PRIMERGY CX250 S2, Intel Xeon E5-2695 v2, 2.40 GHz

**SPECfp\_rate\_base2006 = 656**

**CPU2006 license:** 19

**Test date:** Nov-2013

**Test sponsor:** Fujitsu

**Hardware Availability:** Sep-2013

**Tested by:** Fujitsu

**Software Availability:** Sep-2013

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/SPECcpu2006/libs/32:/SPECcpu2006/libs/64:/SPECcpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

For information about Fujitsu please visit: <http://www.fujitsu.com>

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp\_rate2006 = 674**

PRIMERGY CX250 S2, Intel Xeon E5-2695 v2, 2.40 GHz

**SPECfp\_rate\_base2006 = 656**

**CPU2006 license:** 19

**Test date:** Nov-2013

**Test sponsor:** Fujitsu

**Hardware Availability:** Sep-2013

**Tested by:** Fujitsu

**Software Availability:** Sep-2013

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp\_rate2006 = 674**

PRIMERGY CX250 S2, Intel Xeon E5-2695 v2, 2.40 GHz

**SPECfp\_rate\_base2006 = 656**

**CPU2006 license:** 19

**Test date:** Nov-2013

**Test sponsor:** Fujitsu

**Hardware Availability:** Sep-2013

**Tested by:** Fujitsu

**Software Availability:** Sep-2013

## Peak Portability Flags (Continued)

465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

### C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

### C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp\_rate2006 = 674

PRIMERGY CX250 S2, Intel Xeon E5-2695 v2, 2.40 GHz

SPECfp\_rate\_base2006 = 656

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Nov-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

## Peak Optimization Flags (Continued)

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20131009.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20131009.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 18:17:20 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 3 December 2013.