



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint®_rate2006 = 249

ProLiant DL360p Gen8
(2.50 GHz, Intel Xeon E5-2609 v2)

SPECint_rate_base2006 = 241

CPU2006 license: 3


Test date: Oct-2013

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2013

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

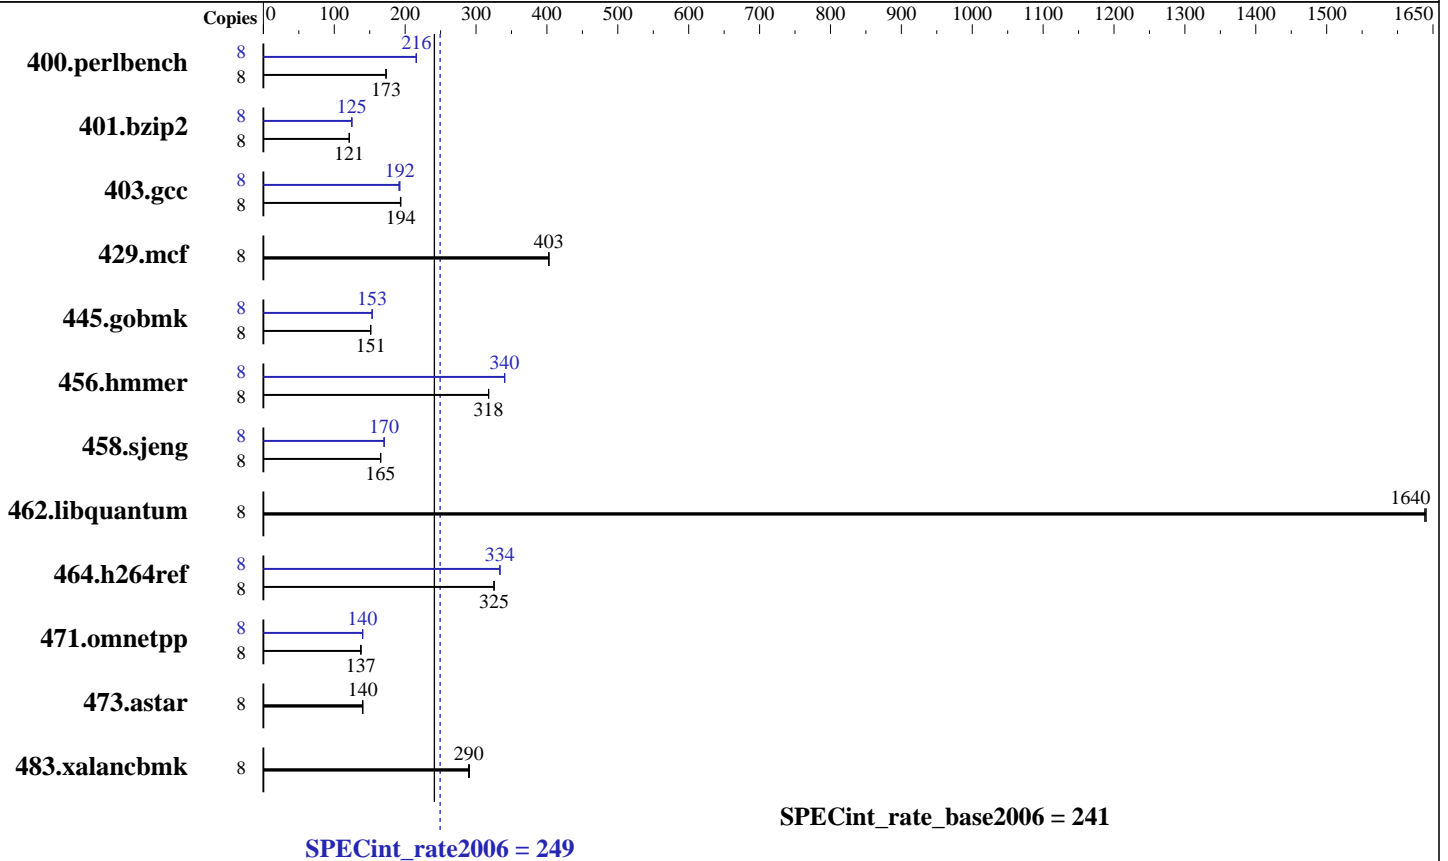

Hardware

CPU Name: Intel Xeon E5-2609 v2
 CPU Characteristics:
 CPU MHz: 2500
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 10 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz and CL9)
 Disk Subsystem: 1 x 400 GB SAS SSD, RAID 0
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)
 Kernel 2.6.32-358.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 249

ProLiant DL360p Gen8
(2.50 GHz, Intel Xeon E5-2609 v2)

SPECint_rate_base2006 = 241

CPU2006 license: 3

Test date: Oct-2013

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2013

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	<u>451</u>	<u>173</u>	452	173	451	173	8	<u>362</u>	<u>216</u>	363	215	362	216
401.bzip2	8	<u>637</u>	<u>121</u>	638	121	636	121	8	<u>619</u>	<u>125</u>	618	125	619	125
403.gcc	8	333	193	332	194	<u>332</u>	<u>194</u>	8	335	192	337	191	<u>335</u>	<u>192</u>
429.mcf	8	181	402	<u>181</u>	<u>403</u>	181	403	8	181	402	<u>181</u>	<u>403</u>	181	403
445.gobmk	8	<u>554</u>	<u>151</u>	554	151	555	151	8	547	153	547	153	<u>547</u>	<u>153</u>
456.hammer	8	235	318	<u>235</u>	<u>318</u>	235	318	8	219	340	219	341	<u>219</u>	<u>340</u>
458.sjeng	8	585	165	585	165	<u>585</u>	<u>165</u>	8	568	170	568	170	<u>568</u>	<u>170</u>
462.libquantum	8	101	1640	<u>101</u>	<u>1640</u>	101	1640	8	101	1640	<u>101</u>	<u>1640</u>	101	1640
464.h264ref	8	544	325	<u>544</u>	<u>325</u>	544	325	8	<u>531</u>	<u>334</u>	531	334	530	334
471.omnetpp	8	<u>364</u>	<u>137</u>	362	138	365	137	8	357	140	357	140	<u>357</u>	<u>140</u>
473.astar	8	<u>401</u>	<u>140</u>	401	140	401	140	8	<u>401</u>	<u>140</u>	401	140	401	140
483.xalancbmk	8	190	291	<u>190</u>	<u>290</u>	191	290	8	190	291	<u>190</u>	<u>290</u>	191	290

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1 > /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
Disabled unused Linux services through "stop_services.sh" before running.

Platform Notes

BIOS Configuration:
HP Power Profile set to Maximum Performance
Memory Power Savings Mode set to Maximum Performance
Collaborative Power Control set to Disabled
Dynamic Power Capping Functionality set to Disabled
Thermal Configuration set to Maximum Cooling
Processor Power and Utilization Monitoring set to Disabled
Memory Refresh Rate set to 1x

Sysinfo program /cpu2006/config/sysinfo.rev6818
Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 249

ProLiant DL360p Gen8
(2.50 GHz, Intel Xeon E5-2609 v2)

SPECint_rate_base2006 = 241

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Oct-2013
Hardware Availability: Sep-2013
Software Availability: Sep-2013

Platform Notes (Continued)

\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
running on ML350pCPU20062 Wed Oct 16 14:48:18 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2609 v2 @ 2.50GHz
 2 "physical id"s (chips)
 8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 4
  siblings  : 4
  physical 0: cores 0 1 2 3
  physical 1: cores 0 1 2 3
cache size : 10240 KB
```

```
From /proc/meminfo
MemTotal:      132119284 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux ML350pCPU20062 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST
2013 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Oct 16 14:46

```
SPEC is set to: /cpu2006
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda3       ext4      365G  171G  176G   50% /
```

```
Additional information from dmidecode:
BIOS HP P71 09/08/2013
Memory:
8x UNKNOWN NOT AVAILABLE
16x UNKNOWN NOT AVAILABLE 8 GB 1333 MHz 2 rank
```

(End of data from sysinfo program)
Regarding the sysinfo display about the memory installed, the correct amount of memory is 128 GB and the dmidecode description should have one line reading as:
Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 249

ProLiant DL360p Gen8
(2.50 GHz, Intel Xeon E5-2609 v2)

SPECint_rate_base2006 = 241

CPU2006 license: 3

Test date: Oct-2013

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2013

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

Platform Notes (Continued)

16x UNKNOWN NOT AVAILABLE 8 GB 1333 MHz 2 rank

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/cpu2006/libs/32:/cpu2006/libs/64:/cpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RedHat EL 6.4

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 249

ProLiant DL360p Gen8
(2.50 GHz, Intel Xeon E5-2609 v2)

SPECint_rate_base2006 = 241

CPU2006 license: 3

Test date: Oct-2013

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2013

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 249

ProLiant DL360p Gen8
(2.50 GHz, Intel Xeon E5-2609 v2)

SPECint_rate_base2006 = 241

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Oct-2013
Hardware Availability: Sep-2013
Software Availability: Sep-2013

Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revB.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 18:06:54 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 December 2013.