



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation


IBM System x3650 M4 BD
(Intel Xeon E5-2680 v2, 2.80 GHz)

SPECint®2006 = 62.1

SPECint_base2006 = 56.9

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jul-2014
Hardware Availability: Jan-2014
Software Availability: Sep-2013

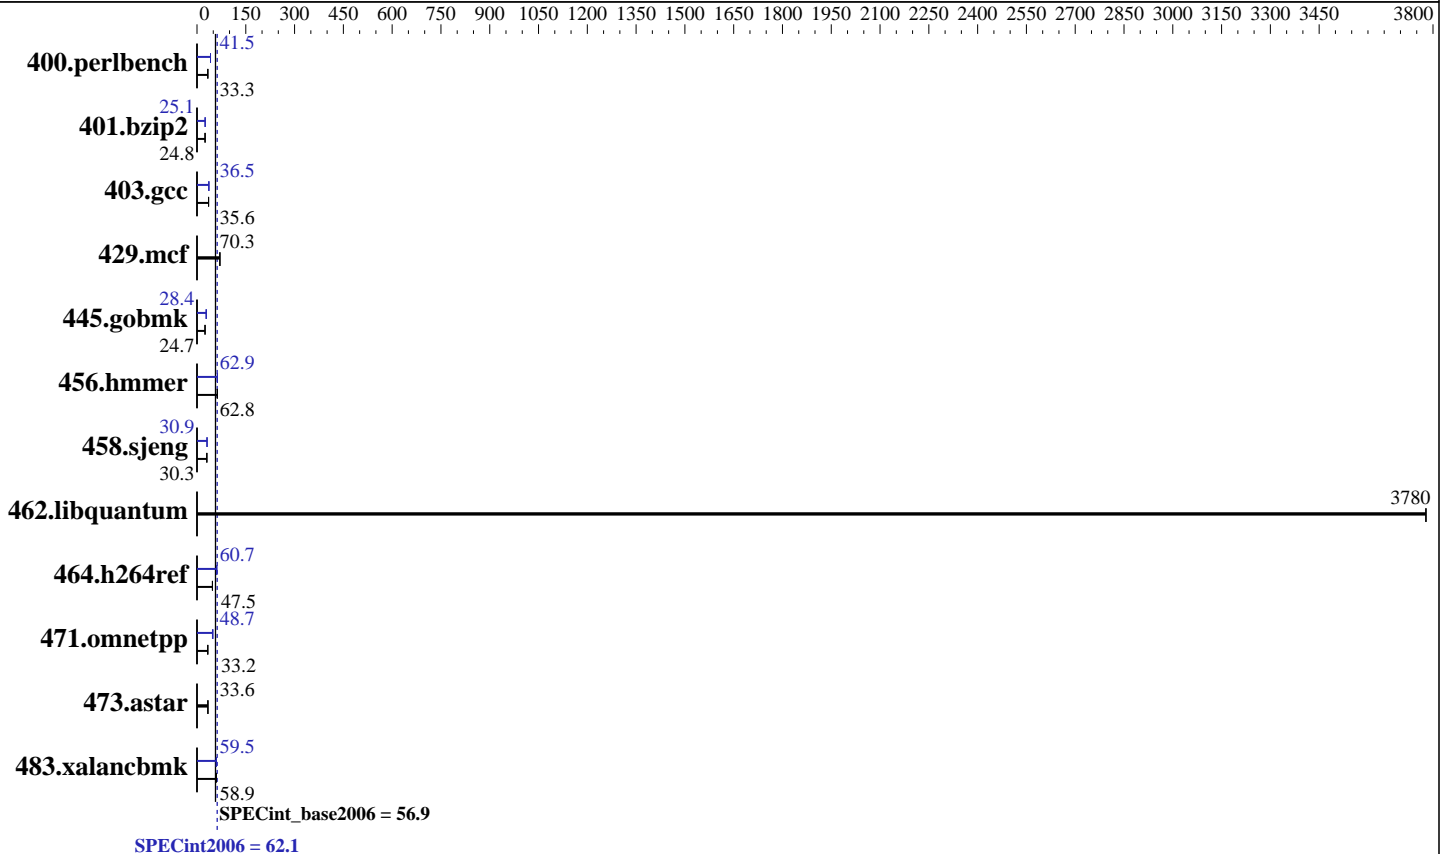

Hardware

CPU Name: Intel Xeon E5-2680 v2
CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz
CPU MHz: 2800
FPU: Integrated
CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core
L3 Cache: 25 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC)
Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)
 2.6.32-358.el6.x86_64
Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
Auto Parallel: Yes
File System: ext4
System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: Microquill SmartHeap V10.0



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3650 M4 BD
(Intel Xeon E5-2680 v2, 2.80 GHz)

SPECint2006 = **62.1**

SPECint_base2006 = **56.9**

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jul-2014
Hardware Availability: Jan-2014
Software Availability: Sep-2013

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	293	33.3	<u>294</u>	<u>33.3</u>	295	33.2	235	41.6	<u>235</u>	<u>41.5</u>	235	41.5
401.bzip2	388	24.8	<u>389</u>	<u>24.8</u>	389	24.8	384	25.1	<u>385</u>	<u>25.1</u>	385	25.1
403.gcc	227	35.5	<u>226</u>	<u>35.6</u>	226	35.7	221	36.5	<u>221</u>	<u>36.5</u>	221	36.4
429.mcf	130	70.4	<u>130</u>	<u>70.3</u>	130	70.2	130	70.4	<u>130</u>	<u>70.3</u>	130	70.2
445.gobmk	424	24.8	425	24.7	<u>424</u>	<u>24.7</u>	370	28.4	370	28.4	<u>370</u>	<u>28.4</u>
456.hammer	151	61.7	148	62.9	<u>149</u>	<u>62.8</u>	148	63.0	150	62.4	<u>148</u>	<u>62.9</u>
458.sjeng	<u>400</u>	<u>30.3</u>	401	30.2	400	30.3	<u>392</u>	<u>30.9</u>	392	30.9	392	30.8
462.libquantum	5.48	3780	<u>5.48</u>	<u>3780</u>	5.48	3780	5.48	3780	<u>5.48</u>	<u>3780</u>	5.48	3780
464.h264ref	466	47.5	<u>466</u>	<u>47.5</u>	467	47.4	<u>364</u>	<u>60.7</u>	364	60.7	365	60.7
471.omnetpp	<u>188</u>	<u>33.2</u>	189	33.1	188	33.2	<u>128</u>	<u>48.7</u>	128	48.9	132	47.5
473.astar	209	33.6	<u>209</u>	<u>33.6</u>	210	33.4	209	33.6	<u>209</u>	<u>33.6</u>	210	33.4
483.xalancbmk	118	58.4	<u>117</u>	<u>58.9</u>	115	59.9	116	59.4	<u>116</u>	<u>59.5</u>	116	59.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Zone reclaim mode enabled with:
echo 1 > /proc/sys/vm/zone_reclaim_mode
Intel Idle Driver disabled with the following Linux kernel parameter in /etc/grub.conf:
intel_idle.max_cstate=0

Platform Notes

BIOS setting:
Operating Mode set to Maximum Performance
Hyper-Threading set to Disable
Sysinfo program /home/SPECcpu-20140116-ic14.0/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
running on x3650M4BD Wed Jul 23 01:14:17 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2680 v2 @ 2.80GHz
2 "physical id"s (chips)
20 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 10

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3650 M4 BD
(Intel Xeon E5-2680 v2, 2.80 GHz)

SPECint2006 = 62.1

SPECint_base2006 = 56.9

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jul-2014
Hardware Availability: Jan-2014
Software Availability: Sep-2013

Platform Notes (Continued)

```
siblings : 10
physical 0: cores 0 1 2 3 4 8 9 10 11 12
physical 1: cores 0 1 2 3 4 8 9 10 11 12
cache size : 25600 KB
```

```
From /proc/meminfo
MemTotal:          264613724 kB
HugePages_Total:   0
Hugepagesize:      2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux x3650M4BD 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jul 22 14:49
```

```
SPEC is set to: /home/SPECcpu-20140116-ic14.0
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/vg_x3650m4bd-lv_home
ext4            404G     67G  317G  18% /home
```

```
Additional information from dmidecode:
BIOS IBM      -[YOE103BUS-1.10]- 02/14/2014
Memory:
16x Samsung M393B2G70QH0-CMA 16 GB 1867 MHz 2 rank
```

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

```
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/SPECcpu-20140116-ic14.0/libs/32:/home/SPECcpu-20140116-ic14.0/libs/64:/home/SPECcpu-20140116-ic14.0/sh"
OMP_NUM_THREADS = "20"
```

```
Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RedHat EL 6.4
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3650 M4 BD
(Intel Xeon E5-2680 v2, 2.80 GHz)

SPECint2006 = 62.1

SPECint_base2006 = 56.9

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jul-2014
Hardware Availability: Jan-2014
Software Availability: Sep-2013

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh -lsmartheap64

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3650 M4 BD
(Intel Xeon E5-2680 v2, 2.80 GHz)

SPECint2006 = 62.1

SPECint_base2006 = 56.9

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jul-2014

Hardware Availability: Jan-2014

Software Availability: Sep-2013

Peak Compiler Invocation (Continued)

400.perlbench: `icc -m32`

445.gobmk: `icc -m32`

464.h264ref: `icc -m32`

C++ benchmarks (except as noted below):

`icpc -m32`

473.astar: `icpc -m64`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`

401.bzip2: `-DSPEC_CPU_LP64`

403.gcc: `-DSPEC_CPU_LP64`

429.mcf: `-DSPEC_CPU_LP64`

456.hmmer: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

473.astar: `-DSPEC_CPU_LP64`

483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -ansi-alias`

401.bzip2: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32
-opt-prefetch -ansi-alias`

403.gcc: `-xSSE4.2 -ipo -O3 -no-prec-div -inline-calloc
-opt-malloc-options=3 -auto-ilp32`

429.mcf: `basepeak = yes`

445.gobmk: `-xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias`

456.hmmer: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-ansi-alias`

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3650 M4 BD
(Intel Xeon E5-2680 v2, 2.80 GHz)

SPECint2006 = 62.1

SPECint_base2006 = 56.9

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jul-2014

Hardware Availability: Jan-2014

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
-Wl,-z,muldefs -L/sh -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-B.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-B.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Aug 12 13:16:47 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 12 August 2014.