



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX1330 M1, Intel Xeon E3-1231 v3, 3.40 GHz

SPECfp®_rate2006 = 152

SPECfp_rate_base2006 = 146

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jun-2014

Hardware Availability: Jul-2014

Software Availability: Nov-2013

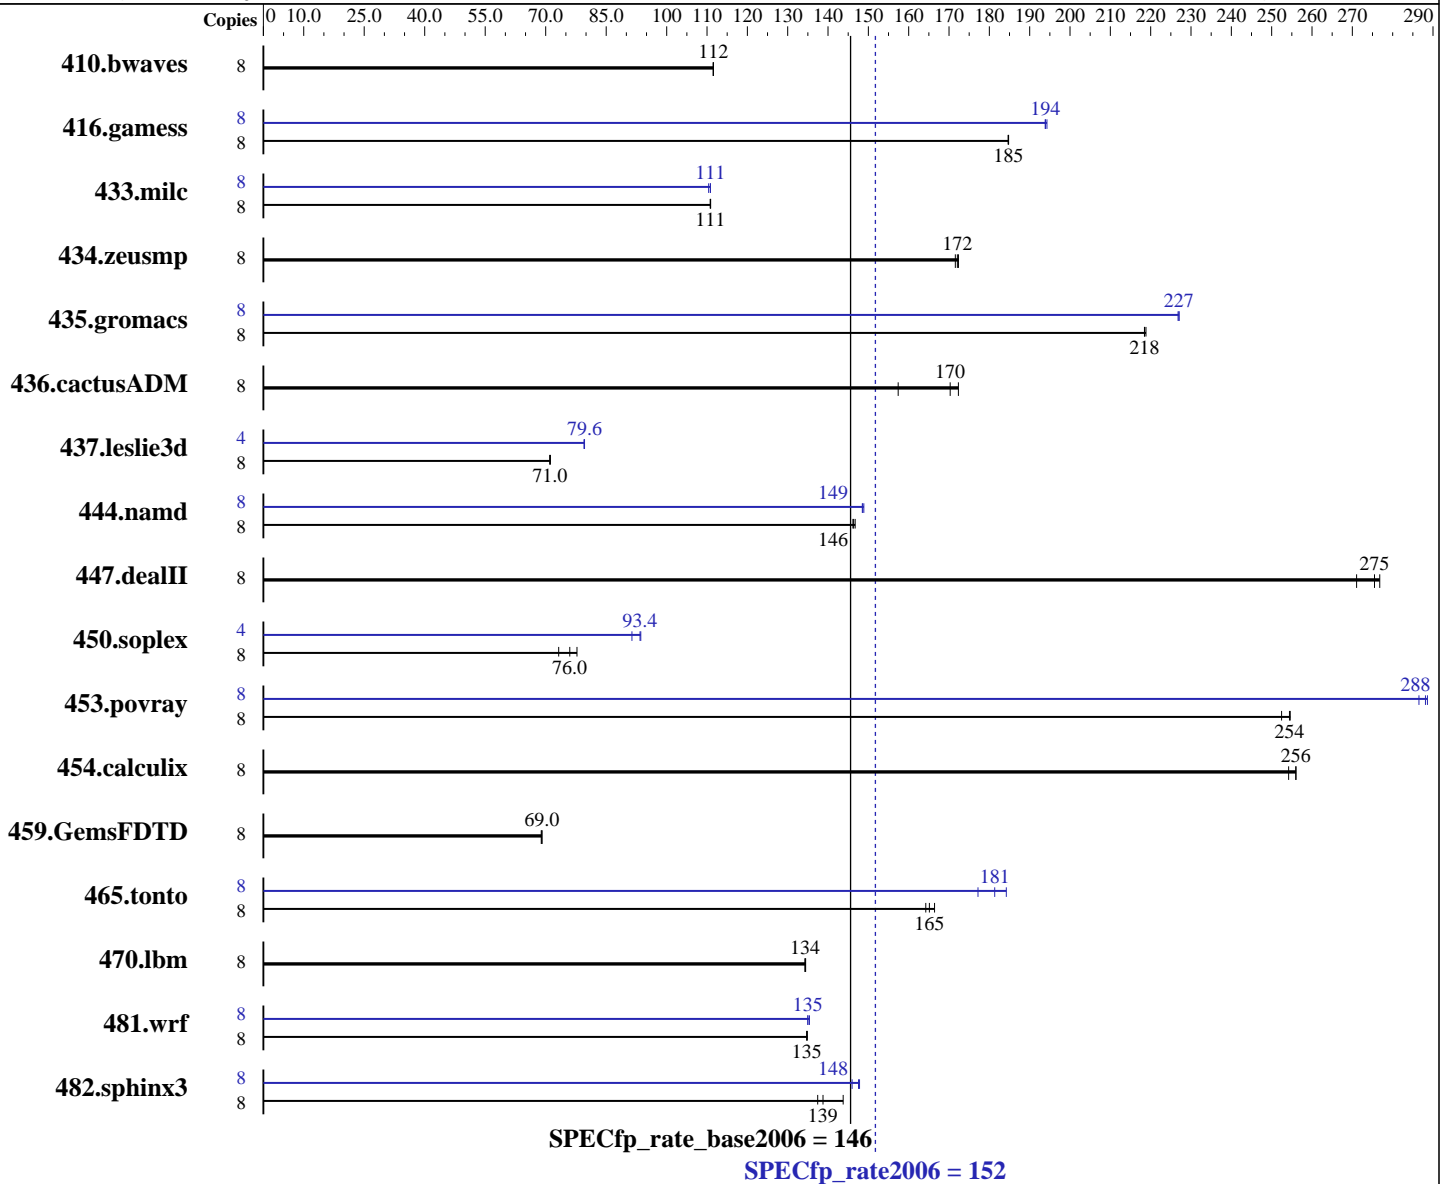

Hardware

CPU Name: Intel Xeon E3-1231 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz
 CPU MHz: 3400
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
 2.6.32-431.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX1330 M1, Intel Xeon E3-1231 v3, 3.40 GHz

SPECfp_rate2006 = 152

SPECfp_rate_base2006 = 146

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jun-2014

Hardware Availability: Jul-2014

Software Availability: Nov-2013

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 32 GB (4 x 8 GB 2Rx8 PC3L-12800E-11, ECC)
Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM
Other Hardware: None

System State: Run level 5 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	<u>975</u>	<u>112</u>	975	112	974	112	8	<u>975</u>	<u>112</u>	975	112	974	112
416.gamess	8	848	185	848	185	<u>848</u>	<u>185</u>	8	808	194	<u>808</u>	<u>194</u>	806	194
433.milc	8	<u>662</u>	<u>111</u>	662	111	663	111	8	663	111	<u>663</u>	<u>111</u>	665	110
434.zeusmp	8	424	172	422	172	<u>423</u>	<u>172</u>	8	424	172	422	172	<u>423</u>	<u>172</u>
435.gromacs	8	<u>261</u>	<u>218</u>	261	219	261	218	8	<u>252</u>	<u>227</u>	252	227	252	227
436.cactusADM	8	<u>561</u>	<u>170</u>	555	172	607	157	8	<u>561</u>	<u>170</u>	555	172	607	157
437.leslie3d	8	1059	71.0	1057	71.2	<u>1059</u>	<u>71.0</u>	4	<u>472</u>	<u>79.6</u>	472	79.6	473	79.5
444.namd	8	437	147	439	146	<u>438</u>	<u>146</u>	8	<u>432</u>	<u>149</u>	432	149	431	149
447.dealII	8	<u>332</u>	<u>275</u>	338	271	331	277	8	<u>332</u>	<u>275</u>	338	271	331	277
450.soplex	8	858	77.8	911	73.2	<u>878</u>	<u>76.0</u>	4	365	91.4	356	93.6	<u>357</u>	<u>93.4</u>
453.povray	8	<u>167</u>	<u>254</u>	169	252	167	255	8	<u>148</u>	<u>288</u>	149	287	147	289
454.calculix	8	260	254	<u>258</u>	<u>256</u>	258	256	8	260	254	<u>258</u>	<u>256</u>	258	256
459.GemsFDTD	8	1232	68.9	1229	69.1	<u>1229</u>	<u>69.0</u>	8	1232	68.9	1229	69.1	<u>1229</u>	<u>69.0</u>
465.tonto	8	<u>477</u>	<u>165</u>	473	166	479	164	8	<u>434</u>	<u>181</u>	444	177	427	184
470.lbm	8	818	134	819	134	<u>818</u>	<u>134</u>	8	818	134	819	134	<u>818</u>	<u>134</u>
481.wrf	8	663	135	663	135	<u>663</u>	<u>135</u>	8	662	135	660	135	<u>662</u>	<u>135</u>
482.sphinx3	8	<u>1124</u>	<u>139</u>	1134	137	1085	144	8	<u>1057</u>	<u>148</u>	1068	146	1055	148

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/SPECcpu2006/libs/32:/SPECcpu2006/libs/64:/SPECcpu2006/sh"

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX1330 M1, Intel Xeon E3-1231 v3, 3.40 GHz

SPECfp_rate2006 = 152

SPECfp_rate_base2006 = 146

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Jun-2014
Hardware Availability: Jul-2014
Software Availability: Nov-2013

General Notes (Continued)

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
For information about Fujitsu please visit: <http://www.fujitsu.com>

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX1330 M1, Intel Xeon E3-1231 v3, 3.40 GHz

SPECfp_rate2006 = 152

SPECfp_rate_base2006 = 146

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jun-2014

Hardware Availability: Jul-2014

Software Availability: Nov-2013

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX1330 M1, Intel Xeon E3-1231 v3, 3.40 GHz

SPECfp_rate2006 = 152

SPECfp_rate_base2006 = 146

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Jun-2014
Hardware Availability: Jul-2014
Software Availability: Nov-2013

Peak Portability Flags (Continued)

454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
-unroll2

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX1330 M1, Intel Xeon E3-1231 v3, 3.40 GHz

SPECfp_rate2006 = 152

SPECfp_rate_base2006 = 146

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jun-2014

Hardware Availability: Jul-2014

Software Availability: Nov-2013

Peak Optimization Flags (Continued)

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-auto -inline-alloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20130924.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20130924.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Oct 9 13:57:42 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 9 October 2014.