



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6028R-WTR
(X10DRW-iT , Intel Xeon E5-2697 v3)

SPECfp®_rate2006 = 860

SPECfp_rate_base2006 = 835

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: May-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

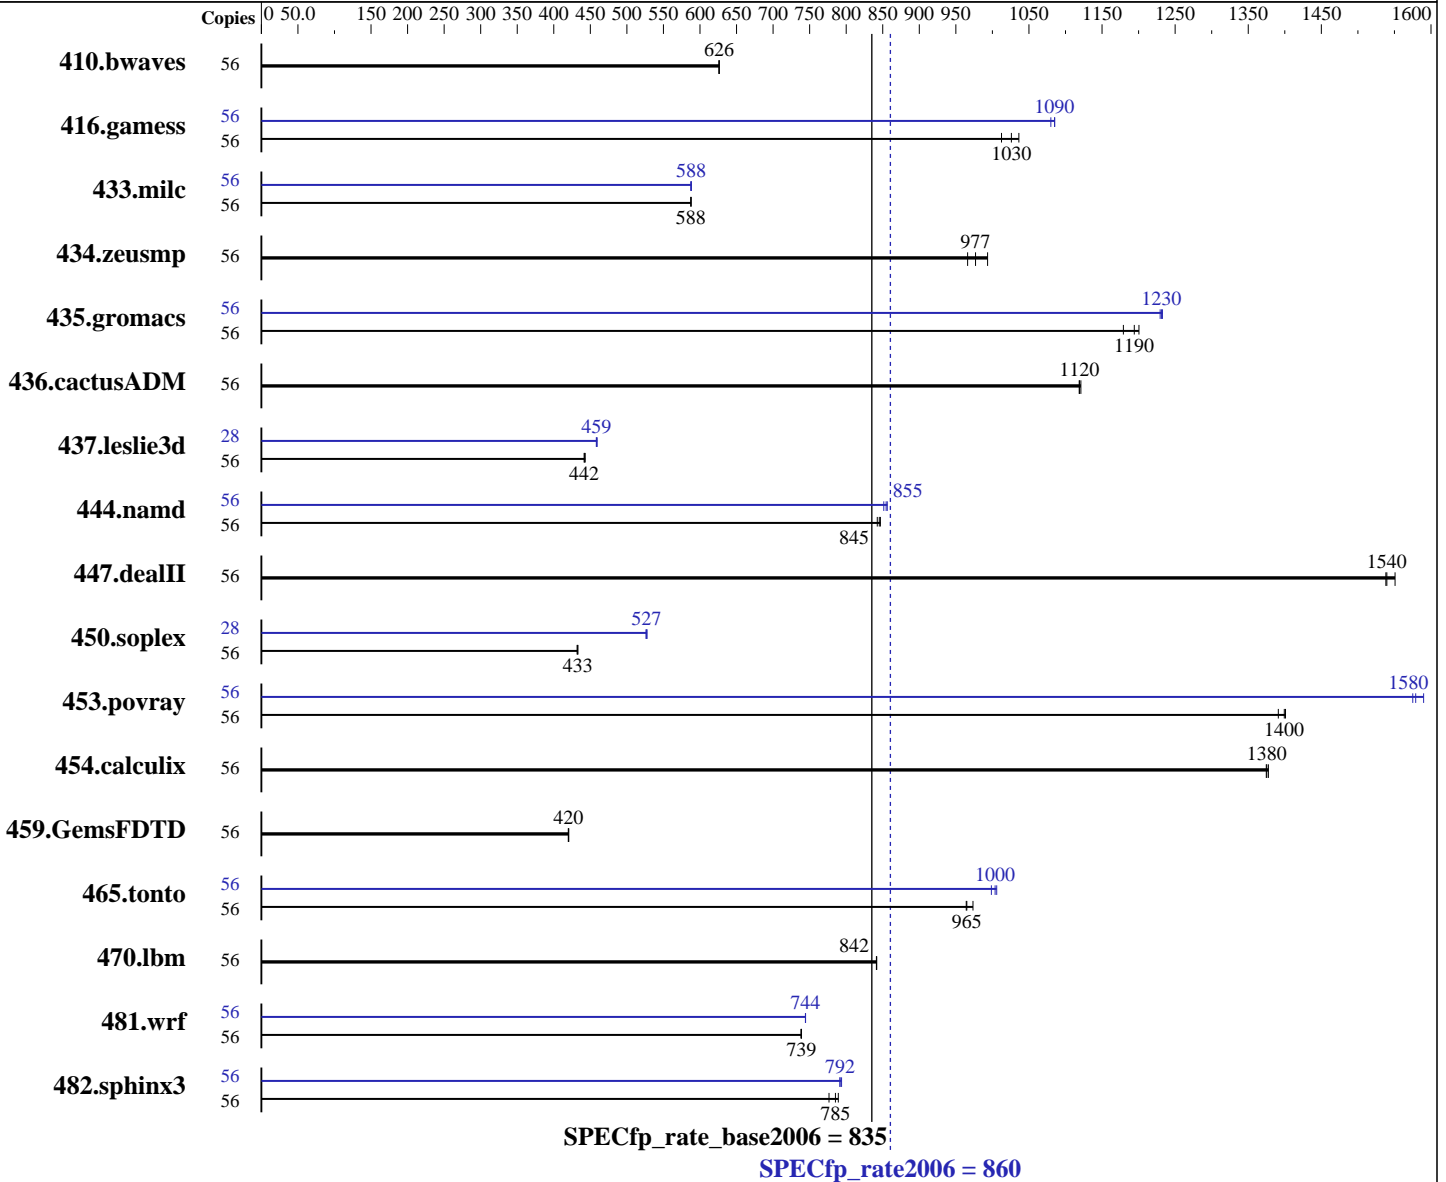

Hardware

CPU Name: Intel Xeon E5-2697 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 28 cores, 2 chips, 14 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: RedHat Enterprise Linux Server release 6.5
 Kernel 2.6.32-431.el6.x86_64
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6028R-WTR
(X10DRW-iT , Intel Xeon E5-2697 v3)

SPECfp_rate2006 = 860

SPECfp_rate_base2006 = 835

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: May-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

L3 Cache: 35 MB I+D on chip per chip
Other Cache: None
Memory: 128 GB (8 x 16 GB 2Rx4 PC4-2133P-R)
Disk Subsystem: 1 x 2000 GB SATA, 7200RPM
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	56	1215	626	1216	626	<u>1215</u>	<u>626</u>	56	1215	626	1216	626	<u>1215</u>	<u>626</u>
416.gamess	56	1058	1040	1083	1010	<u>1069</u>	<u>1030</u>	56	1010	1090	1015	1080	<u>1011</u>	<u>1090</u>
433.milc	56	875	587	875	588	<u>875</u>	<u>588</u>	56	874	588	<u>874</u>	<u>588</u>	875	587
434.zeusmp	56	513	993	527	966	<u>522</u>	<u>977</u>	56	513	993	527	966	<u>522</u>	<u>977</u>
435.gromacs	56	333	1200	<u>335</u>	<u>1190</u>	339	1180	56	324	1230	<u>325</u>	<u>1230</u>	325	1230
436.cactusADM	56	597	1120	598	1120	<u>598</u>	<u>1120</u>	56	597	1120	598	1120	<u>598</u>	<u>1120</u>
437.leslie3d	56	1188	443	1192	442	<u>1192</u>	<u>442</u>	28	574	458	<u>574</u>	<u>459</u>	573	459
444.namd	56	530	847	<u>531</u>	<u>845</u>	533	843	56	525	856	527	851	<u>526</u>	<u>855</u>
447.dealII	56	416	1540	413	1550	<u>416</u>	<u>1540</u>	56	416	1540	413	1550	<u>416</u>	<u>1540</u>
450.soplex	56	<u>1079</u>	<u>433</u>	1081	432	1079	433	28	443	528	<u>443</u>	<u>527</u>	444	526
453.povray	56	<u>213</u>	<u>1400</u>	213	1400	214	1390	56	189	1580	<u>189</u>	<u>1580</u>	187	1590
454.calculix	56	<u>336</u>	<u>1380</u>	335	1380	336	1370	56	<u>336</u>	<u>1380</u>	335	1380	336	1370
459.GemsFDTD	56	1413	421	<u>1415</u>	<u>420</u>	1415	420	56	1413	421	<u>1415</u>	<u>420</u>	1415	420
465.tonto	56	566	973	571	964	<u>571</u>	<u>965</u>	56	552	999	<u>549</u>	<u>1000</u>	548	1010
470.lbm	56	<u>914</u>	<u>842</u>	915	841	914	842	56	<u>914</u>	<u>842</u>	915	841	914	842
481.wrf	56	847	738	847	739	<u>847</u>	<u>739</u>	56	841	744	<u>840</u>	<u>744</u>	840	744
482.sphinx3	56	1383	789	<u>1390</u>	<u>785</u>	1406	777	56	1375	794	<u>1379</u>	<u>792</u>	1379	791

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:
COD Enable= Enabled
Early Snoop = Disabled

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6028R-WTR
(X10DRW-iT , Intel Xeon E5-2697 v3)

SPECfp_rate2006 = 860

SPECfp_rate_base2006 = 835

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: May-2014
Hardware Availability: Sep-2014
Software Availability: Nov-2013

Platform Notes (Continued)

Enforce POR = Disabled
Memory Frequency = 2133

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RedHat EL 6.4
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6028R-WTR
(X10DRW-iT , Intel Xeon E5-2697 v3)

SPECfp_rate2006 = 860

SPECfp_rate_base2006 = 835

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: May-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

Base Portability Flags (Continued)

465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6028R-WTR
(X10DRW-iT , Intel Xeon E5-2697 v3)

SPECfp_rate2006 = 860

SPECfp_rate_base2006 = 835

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: May-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

Peak Portability Flags (Continued)

```

416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2)
         -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
         -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
            -unroll2

```

C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2)
         -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
         -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2)
         -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
         -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2)
         -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4
         -ansi-alias

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6028R-WTR
(X10DRW-iT , Intel Xeon E5-2697 v3)

SPECfp_rate2006 = 860

SPECfp_rate_base2006 = 835

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: May-2014
Hardware Availability: Sep-2014
Software Availability: Nov-2013

Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revE.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6028R-WTR
(X10DRW-iT , Intel Xeon E5-2697 v3)

SPECfp_rate2006 = 860

SPECfp_rate_base2006 = 835

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: May-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Nov 12 10:17:34 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 7 November 2014.