



# SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Huawei

**SPECint®2006 = 61.7**

Huawei CH121 V3 (Intel Xeon E5-2640 v3)

**SPECint\_base2006 = 59.0**

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Jan-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

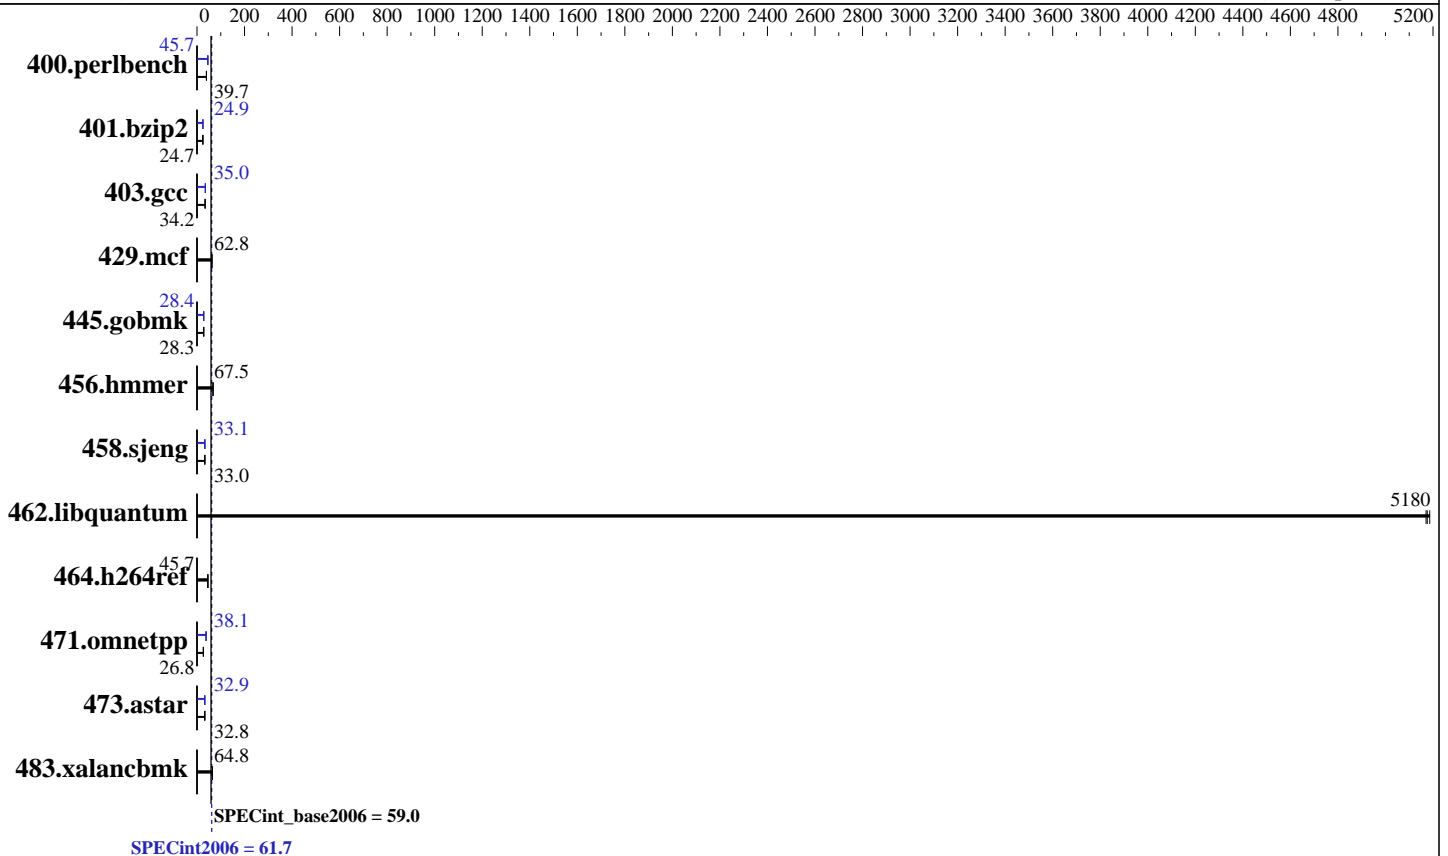

### Hardware

CPU Name: Intel Xeon E5-2640 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.40 GHz  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R, running at 1866 MHz)  
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)  
 3.10.0-123.el7.x86\_64  
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 61.7

Huawei CH121 V3 (Intel Xeon E5-2640 v3)

SPECint\_base2006 = 59.0

CPU2006 license: 3175  
Test sponsor: Huawei  
Tested by: Huawei

Test date: Jan-2015  
Hardware Availability: Sep-2014  
Software Availability: Sep-2014

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	245	39.8	247	39.6	<b>246</b>	<b>39.7</b>	<b>214</b>	<b>45.7</b>	214	45.7	214	45.6
401.bzip2	<b>390</b>	<b>24.7</b>	390	24.7	391	24.7	<b>387</b>	<b>24.9</b>	387	24.9	386	25.0
403.gcc	<b>236</b>	<b>34.2</b>	236	34.1	235	34.2	230	35.0	230	35.0	<b>230</b>	<b>35.0</b>
429.mcf	145	62.8	145	62.8	<b>145</b>	<b>62.8</b>	145	62.8	145	62.8	<b>145</b>	<b>62.8</b>
445.gobmk	371	28.3	<b>371</b>	<b>28.3</b>	371	28.3	369	28.4	369	28.4	<b>369</b>	<b>28.4</b>
456.hammer	138	67.4	<b>138</b>	<b>67.5</b>	138	67.5	138	67.4	<b>138</b>	<b>67.5</b>	138	67.5
458.sjeng	367	33.0	<b>367</b>	<b>33.0</b>	367	33.0	<b>365</b>	<b>33.1</b>	365	33.2	365	33.1
462.libquantum	4.00	5190	<b>4.00</b>	<b>5180</b>	4.01	5170	4.00	5190	<b>4.00</b>	<b>5180</b>	4.01	5170
464.h264ref	485	45.6	482	45.9	<b>484</b>	<b>45.7</b>	485	45.6	482	45.9	<b>484</b>	<b>45.7</b>
471.omnetpp	<b>233</b>	<b>26.8</b>	231	27.1	234	26.7	166	37.7	162	38.6	<b>164</b>	<b>38.1</b>
473.astar	<b>214</b>	<b>32.8</b>	214	32.8	214	32.8	214	32.8	<b>214</b>	<b>32.9</b>	213	32.9
483.xalancbmk	107	64.7	106	64.9	<b>107</b>	<b>64.8</b>	107	64.7	106	64.9	<b>107</b>	<b>64.8</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Sysinfo program /spec15/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date:: 2014-06-25 \$# e3fbb8667b5a285932ceab81e28219e1  
running on localhost.localdomain Sun Jan 12 16:53:02 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2640 v3 @ 2.60GHz
 2 "physical id"s (chips)
 16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 8
siblings : 8
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 61.7

Huawei CH121 V3 (Intel Xeon E5-2640 v3)

SPECint\_base2006 = 59.0

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jan-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

## Platform Notes (Continued)

cache size : 20480 KB

From /proc/meminfo

MemTotal: 263721484 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*

os-release:

NAME="Red Hat Enterprise Linux Server"  
VERSION="7.0 (Maipo)"  
ID="rhel"  
ID\_LIKE="fedora"  
VERSION\_ID="7.0"  
PRETTY\_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"  
ANSI\_COLOR="0;31"  
CPE\_NAME="cpe:/o:redhat:enterprise\_linux:7.0:GA:server"

redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)

system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)

system-release-cpe: cpe:/o:redhat:enterprise\_linux:7.0:ga:server

uname -a:

Linux localhost.localdomain 3.10.0-123.el7.x86\_64 #1 SMP Mon May 5 11:16:57 EDT 2014 x86\_64 x86\_64 x86\_64 GNU/Linux

run-level 3 Jan 12 16:51

SPEC is set to: /spec15

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-root	ext4	439G	20G	397G	5%	/

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Insyde Corp. 1.19 10/10/2014

Memory:

8x NO DIMM NO DIMM 3 rank

8x Samsung M393A2G40DB0-CPB 16 GB 1 rank 2133 MHz, configured at 1867 MHz

8x Samsung M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz, configured at 1867 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,1,0"

LD\_LIBRARY\_PATH = "/spec15/libs/32:/spec15/libs/64:/spec15/sh"

OMP\_NUM\_THREADS = "16"

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei	SPECint2006 =	61.7
Huawei CH121 V3 (Intel Xeon E5-2640 v3)	SPECint_base2006 =	59.0

CPU2006 license: 3175  
 Test sponsor: Huawei  
 Tested by: Huawei

Test date: Jan-2015  
 Hardware Availability: Sep-2014  
 Software Availability: Sep-2014

## General Notes (Continued)

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0  
 Transparent Huge Pages enabled with:  
 echo always > /sys/kernel/mm/transparent\_hugepage/enabled  
 runspec command invoked through numactl i.e.:  
 numactl --interleave=all runspec <etc>  
 The Huawei CH121 V3 and Huawei CH222 V3 models are electronically equivalent.  
 The results have been measured on a Huawei CH121 V3 model.

## Base Compiler Invocation

C benchmarks:  
 icc -m64  
 C++ benchmarks:  
 icpc -m64

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
 401.bzip2: -DSPEC\_CPU\_LP64  
 403.gcc: -DSPEC\_CPU\_LP64  
 429.mcf: -DSPEC\_CPU\_LP64  
 445.gobmk: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 464.h264ref: -DSPEC\_CPU\_LP64  
 471.omnetpp: -DSPEC\_CPU\_LP64  
 473.astar: -DSPEC\_CPU\_LP64  
 483.xalancbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
 -xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32  
 C++ benchmarks:  
 -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
 -Wl,-z,muldefs -L/sh -lsmarthheap64



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 61.7

Huawei CH121 V3 (Intel Xeon E5-2640 v3)

SPECint\_base2006 = 59.0

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jan-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

445.gobmk: icc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

C++ benchmarks (except as noted below):

icpc -m64

471.omnetpp: icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

401.bzip2: -DSPEC\_CPU\_LP64

403.gcc: -DSPEC\_CPU\_LP64

429.mcf: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

464.h264ref: -DSPEC\_CPU\_LP64

473.astar: -DSPEC\_CPU\_LP64

483.xalancbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)

-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)

-opt-prefetch -ansi-alias

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)

-O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32

-opt-prefetch -ansi-alias

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

<b>Huawei</b>	<b>SPECint2006 =</b>	<b>61.7</b>
<b>Huawei CH121 V3 (Intel Xeon E5-2640 v3)</b>	<b>SPECint_base2006 =</b>	<b>59.0</b>

<b>CPU2006 license:</b> 3175	<b>Test date:</b> Jan-2015
<b>Test sponsor:</b> Huawei	<b>Hardware Availability:</b> Sep-2014
<b>Tested by:</b> Huawei	<b>Software Availability:</b> Sep-2014

## Peak Optimization Flags (Continued)

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc  
-opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias

456.hmmer: basepeak = yes

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

### C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-ra-region-strategy=block -ansi-alias  
-Wl,-z,muldefs -L/sh -lsmartheap

473.astar: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-auto-p32 -Wl,-z,muldefs -L/sh -lsmartheap64

483.xalancbmk: basepeak = yes

## Peak Other Flags

### C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>  
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-HASWELL-V1.1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>  
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-HASWELL-V1.1.xml>



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Huawei

SPECint2006 = 61.7

Huawei CH121 V3 (Intel Xeon E5-2640 v3)

SPECint\_base2006 = 59.0

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Jan-2015

Hardware Availability: Sep-2014

Software Availability: Sep-2014

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Jan 27 13:28:09 2015 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 27 January 2015.