



# SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Supermicro

Motherboard X10SLM+-F  
(Intel Xeon E3-1231 v3)

SPECint®2006 = **60.7**

SPECint\_base2006 = **59.1**

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jan-2015

Hardware Availability: May-2014

Software Availability: Sep-2014

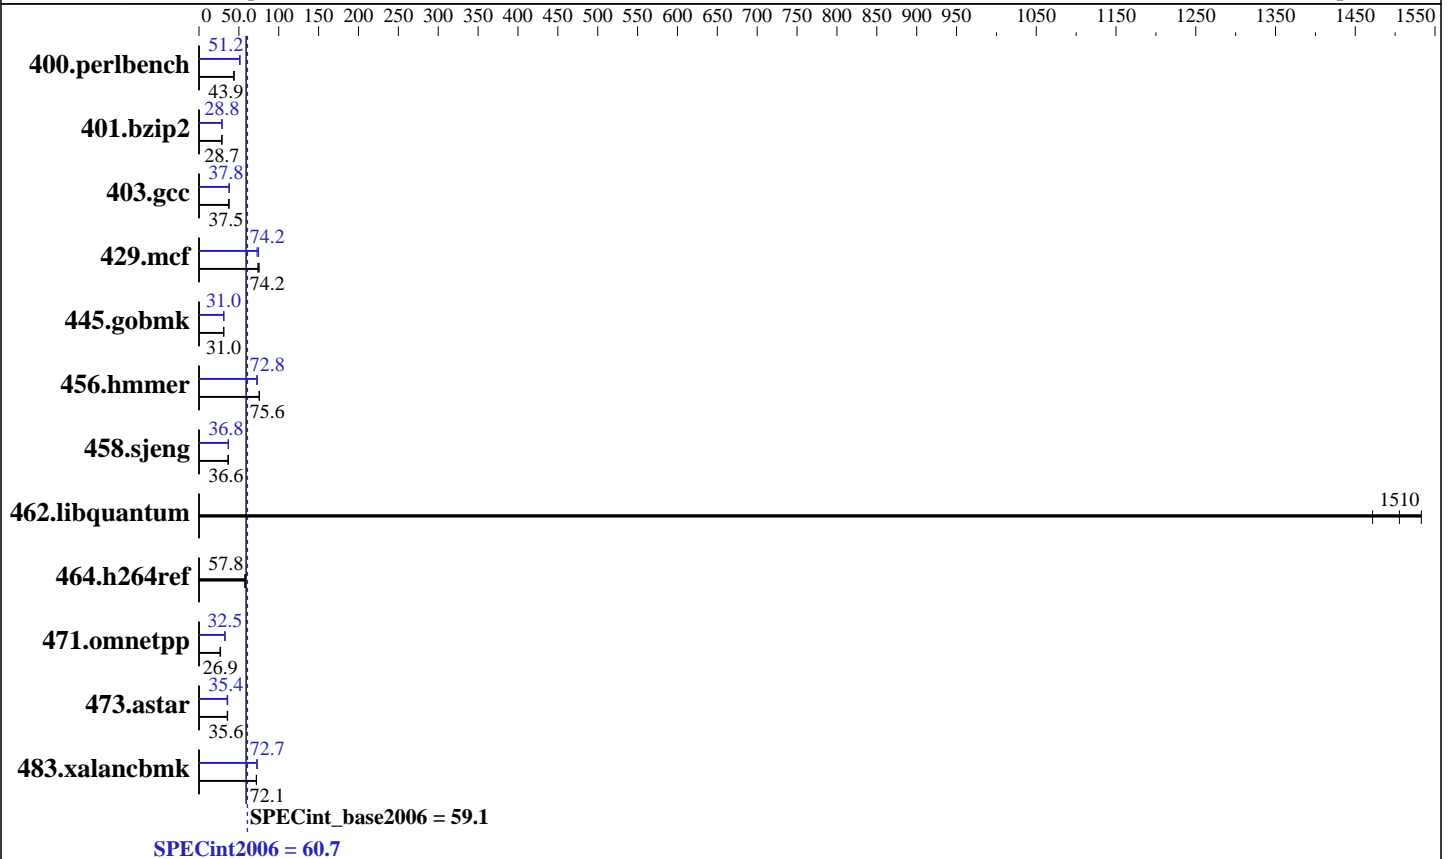

### Hardware

CPU Name: Intel Xeon E3-1231 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz  
 CPU MHz: 3400  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 8 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 32 GB (4 x 8 GB 2Rx8 PC3-14900E-13, ECC, running at 1600 MHz)  
 Disk Subsystem: 1 x 512 GB SATA III, SSD  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 7.0, Kernel 3.10.0-123.el7.x86\_64  
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux  
 Auto Parallel: Yes  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Supermicro

Motherboard X10SLM+-F  
(Intel Xeon E3-1231 v3)

SPECint2006 = **60.7**

SPECint\_base2006 = **59.1**

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Jan-2015  
Hardware Availability: May-2014  
Software Availability: Sep-2014

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	223	43.8	<u>223</u>	<u>43.9</u>	222	43.9	<u>191</u>	<u>51.2</u>	191	51.1	190	51.4
401.bzip2	336	28.7	339	28.5	<u>336</u>	<u>28.7</u>	334	28.9	335	28.8	<u>335</u>	<u>28.8</u>
403.gcc	215	37.5	<u>215</u>	<u>37.5</u>	215	37.5	214	37.7	<u>213</u>	<u>37.8</u>	212	38.1
429.mcf	123	74.0	<u>123</u>	<u>74.2</u>	121	75.5	125	72.7	122	74.7	<u>123</u>	<u>74.2</u>
445.gobmk	<u>338</u>	<u>31.0</u>	338	31.0	340	30.9	<u>338</u>	<u>31.0</u>	338	31.0	338	31.1
456.hammer	124	75.5	<u>123</u>	<u>75.6</u>	123	75.7	128	72.9	<u>128</u>	<u>72.8</u>	128	72.7
458.sjeng	<u>331</u>	<u>36.6</u>	330	36.6	331	36.6	329	36.8	329	36.7	<u>329</u>	<u>36.8</u>
462.libquantum	14.1	1470	<u>13.8</u>	<u>1510</u>	13.5	1530	14.1	1470	<u>13.8</u>	<u>1510</u>	13.5	1530
464.h264ref	383	57.7	<u>383</u>	<u>57.8</u>	383	57.8	383	57.7	<u>383</u>	<u>57.8</u>	383	57.8
471.omnetpp	237	26.4	231	27.1	<u>232</u>	<u>26.9</u>	192	32.6	<u>192</u>	<u>32.5</u>	192	32.5
473.astar	<u>197</u>	<u>35.6</u>	195	35.9	198	35.5	195	36.0	198	35.4	<u>198</u>	<u>35.4</u>
483.xalancbmk	95.7	72.1	<u>95.7</u>	<u>72.1</u>	96.1	71.8	95.0	72.6	<u>94.9</u>	<u>72.7</u>	94.8	72.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

As tested, the system used a Supermicro SuperChassis 113MTQ-330CB and SNK-P0046P heatsink.  
Sysinfo program /home/cpu2006/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1  
running on 21-45.hnet Sat Jan 24 23:52:23 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E3-1231 v3 @ 3.40GHz
1 "physical id"s (chips)
8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 4
siblings : 8
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Supermicro

Motherboard X10SLM+-F  
(Intel Xeon E3-1231 v3)

SPECint2006 = 60.7

SPECint\_base2006 = 59.1

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Jan-2015  
Hardware Availability: May-2014  
Software Availability: Sep-2014

### Platform Notes (Continued)

physical 0: cores 0 1 2 3  
cache size : 8192 KB

From /proc/meminfo  
MemTotal: 32742812 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*  
os-release:  
NAME="Red Hat Enterprise Linux Server"  
VERSION="7.0 (Maipo)"  
ID="rhel"  
ID\_LIKE="fedora"  
VERSION\_ID="7.0"  
PRETTY\_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"  
ANSI\_COLOR="0;31"  
CPE\_NAME="cpe:/o:redhat:enterprise\_linux:7.0:GA:server"  
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)  
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)  
system-release-cpe: cpe:/o:redhat:enterprise\_linux:7.0:ga:server

uname -a:  
Linux 21-45.hnet 3.10.0-123.el7.x86\_64 #1 SMP Mon May 5 11:16:57 EDT 2014  
x86\_64 x86\_64 x86\_64 GNU/Linux

run-level 3 Jan 23 20:43

SPEC is set to: /home/cpu2006  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/mapper/rhel\_21--45-home xfs 423G 78G 345G 19% /home

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 2.00 04/24/2014

Memory:  
4x Samsung M391B1G73QH0-CMA 8 GB 2 rank 1333 MHz, configured at 1600 MHz

(End of data from sysinfo program)

### General Notes

Environment variables set by runspec before the start of the run:  
KMP\_AFFINITY = "granularity=fine,scatter"  
LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"  
OMP\_NUM\_THREADS = "4"

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Supermicro

Motherboard X10SLM+-F  
(Intel Xeon E3-1231 v3)

SPECint2006 = 60.7

SPECint\_base2006 = 59.1

**CPU2006 license:** 001176  
**Test sponsor:** Supermicro  
**Tested by:** Supermicro

**Test date:** Jan-2015  
**Hardware Availability:** May-2014  
**Software Availability:** Sep-2014

### General Notes (Continued)

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/transparent\_hugepage/enabled

### Base Compiler Invocation

C benchmarks:  
icc -m64  
  
C++ benchmarks:  
icpc -m64

### Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
471.omnetpp: -DSPEC\_CPU\_LP64  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

### Base Optimization Flags

C benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32  
  
C++ benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-Wl,-z,muldefs -L/sh -lsmartheap64

### Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Supermicro

Motherboard X10SLM+-F  
(Intel Xeon E3-1231 v3)

**SPECint2006 = 60.7**

**SPECint\_base2006 = 59.1**

**CPU2006 license:** 001176  
**Test sponsor:** Supermicro  
**Tested by:** Supermicro

**Test date:** Jan-2015  
**Hardware Availability:** May-2014  
**Software Availability:** Sep-2014

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

445.gobmk: icc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

C++ benchmarks (except as noted below):

icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

473.astar: icpc -m64

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -ansi-alias

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32  
-opt-prefetch -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc  
-opt-malloc-options=3 -auto-ilp32

429.mcf: -xCORE-AVX2 -ipo -O3 -no-prec-div -parallel  
-opt-prefetch -auto-p32

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Supermicro

Motherboard X10SLM+-F  
(Intel Xeon E3-1231 v3)

**SPECint2006 = 60.7**

**SPECint\_base2006 = 59.1**

**CPU2006 license:** 001176  
**Test sponsor:** Supermicro  
**Tested by:** Supermicro

**Test date:** Jan-2015  
**Hardware Availability:** May-2014  
**Software Availability:** Sep-2014

## Peak Optimization Flags (Continued)

456.hmmr: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
-ansi-alias

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-ra-region-strategy=block -ansi-alias  
-Wl,-z,muldefs -L/sh -lsmarheap

473.astar: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-auto-p32 -Wl,-z,muldefs -L/sh -lsmarheap64

483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-ansi-alias -Wl,-z,muldefs -L/sh -lsmarheap

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.xml>



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Supermicro

Motherboard X10SLM+-F  
(Intel Xeon E3-1231 v3)

**SPECint2006 = 60.7**

**SPECint\_base2006 = 59.1**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Jan-2015

**Hardware Availability:** May-2014

**Software Availability:** Sep-2014

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Feb 10 18:35:15 2015 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 10 February 2015.