



# SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

**SPECint®2006 = 53.1**

Lenovo NeXtScale nx360 M5  
(Intel Xeon E5-2630L v3, 1.80 GHz)

**SPECint\_base2006 = 50.9**

CPU2006 license: 9017


Test date: Jun-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Nov-2014

Tested by: Lenovo Group Limited

Software Availability: Sep-2014

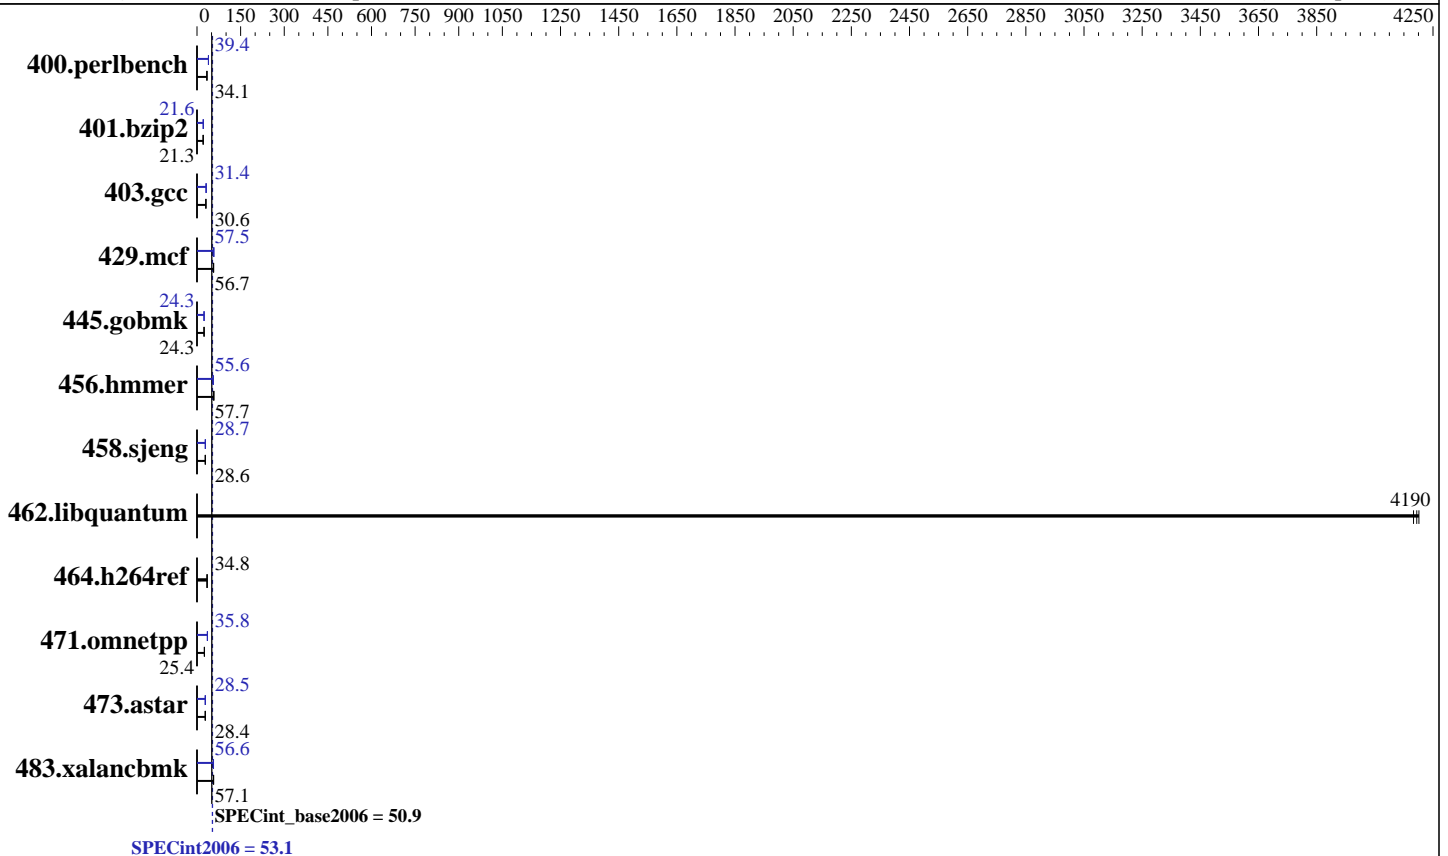

### Hardware

CPU Name: Intel Xeon E5-2630L v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.90 GHz  
 CPU MHz: 1800  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R, running at 1866 MHz)  
 Disk Subsystem: 1 x 1000 GB SATA, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)  
 3.10.0-123.el7.x86\_64  
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux  
 Auto Parallel: Yes  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECint2006 = **53.1**

Lenovo NeXtScale nx360 M5  
(Intel Xeon E5-2630L v3, 1.80 GHz)

SPECint\_base2006 = **50.9**

CPU2006 license: 9017

Test date: Jun-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Nov-2014

Tested by: Lenovo Group Limited

Software Availability: Sep-2014

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	285	34.2	<b>287</b>	<b>34.1</b>	287	34.0	248	39.4	249	39.3	<b>248</b>	<b>39.4</b>
401.bzip2	454	21.3	452	21.3	<b>454</b>	<b>21.3</b>	448	21.6	446	21.7	<b>447</b>	<b>21.6</b>
403.gcc	<b>263</b>	<b>30.6</b>	263	30.6	263	30.6	256	31.4	<b>256</b>	<b>31.4</b>	256	31.4
429.mcf	159	57.5	161	56.7	<b>161</b>	<b>56.7</b>	159	57.5	157	57.9	<b>159</b>	<b>57.5</b>
445.gobmk	<b>431</b>	<b>24.3</b>	431	24.3	430	24.4	<b>431</b>	<b>24.3</b>	431	24.3	431	24.3
456.hammer	162	57.6	162	57.7	<b>162</b>	<b>57.7</b>	<b>168</b>	<b>55.6</b>	168	55.5	168	55.6
458.sjeng	424	28.6	<b>423</b>	<b>28.6</b>	423	28.6	<b>421</b>	<b>28.7</b>	422	28.7	421	28.7
462.libquantum	<b>4.94</b>	<b>4190</b>	4.93	4200	4.95	4180	<b>4.94</b>	<b>4190</b>	4.93	4200	4.95	4180
464.h264ref	639	34.6	635	34.8	<b>637</b>	<b>34.8</b>	639	34.6	635	34.8	<b>637</b>	<b>34.8</b>
471.omnetpp	247	25.3	243	25.7	<b>246</b>	<b>25.4</b>	174	35.9	175	35.7	<b>175</b>	<b>35.8</b>
473.astar	247	28.4	<b>247</b>	<b>28.4</b>	245	28.6	<b>246</b>	<b>28.5</b>	248	28.3	244	28.8
483.xalancbmk	<b>121</b>	<b>57.1</b>	121	57.1	122	56.7	<b>122</b>	<b>56.6</b>	<b>122</b>	<b>56.6</b>	121	56.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS setting:

Operating Mode set to "Efficiency-Favor Performance"

Sysinfo program /home/SPEC/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1

running on wilykat-2.labs.lenovo.com Wed Jun 24 10:24:58 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2630L v3 @ 1.80GHz

2 "physical id"s (chips)

16 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 8

siblings : 8

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 2



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

SPECint2006 = **53.1**

Lenovo NeXtScale nx360 M5  
(Intel Xeon E5-2630L v3, 1.80 GHz)

SPECint\_base2006 = **50.9**

CPU2006 license: 9017

Test date: Jun-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Nov-2014

Tested by: Lenovo Group Limited

Software Availability: Sep-2014

### Platform Notes (Continued)

```
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal:          263587828 kB
HugePages_Total:   0
Hugepagesize:      2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.0 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.0"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server
```

```
uname -a:
Linux wilykat-2.labs.lenovo.com 3.10.0-123.el7.x86_64 #1 SMP Mon May 5
11:16:57 EDT 2014 x86_64 x86_64 x86_64 GNU/Linux
```

```
SPEC is set to: /home/SPEC
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-root xfs   927G  11G  916G   2% /
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS IBM -[THE106CUS-1.11]- 02/16/2015
Memory:
10x Hynix HMA42GR7MFR4N-TF 16 GB 2 rank 2133 MHz
6x Hynix HMA42GR7MFR4N-TFT1 16 GB 2 rank 2133 MHz
```

(End of data from sysinfo program)

### General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/SPEC/libs/32:/home/SPEC/libs/64:/home/SPEC/sh"
OMP_NUM_THREADS = "16"
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Lenovo Group Limited**

**SPECint2006 = 53.1**

Lenovo NeXtScale nx360 M5  
(Intel Xeon E5-2630L v3, 1.80 GHz)

**SPECint\_base2006 = 50.9**

**CPU2006 license:** 9017

**Test date:** Jun-2015

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Nov-2014

**Tested by:** Lenovo Group Limited

**Software Availability:** Sep-2014

## General Notes (Continued)

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/transparent\_hugepage/enabled

## Base Compiler Invocation

C benchmarks:  
icc -m64  
  
C++ benchmarks:  
icpc -m64

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
471.omnetpp: -DSPEC\_CPU\_LP64  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32  
  
C++ benchmarks:  
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-Wl,-z,muldefs -L/sh -lsmartheap64

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Lenovo Group Limited**

**SPECint2006 = 53.1**

Lenovo NeXtScale nx360 M5  
(Intel Xeon E5-2630L v3, 1.80 GHz)

**SPECint\_base2006 = 50.9**

**CPU2006 license:** 9017

**Test date:** Jun-2015

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Nov-2014

**Tested by:** Lenovo Group Limited

**Software Availability:** Sep-2014

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

445.gobmk: icc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

C++ benchmarks (except as noted below):

icpc -m32 -L/opt/intel/composer\_xe\_2015/lib/ia32

473.astar: icpc -m64

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

401.bzip2: -DSPEC\_CPU\_LP64

403.gcc: -DSPEC\_CPU\_LP64

429.mcf: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

464.h264ref: -DSPEC\_CPU\_LP64

473.astar: -DSPEC\_CPU\_LP64

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)

-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)

-opt-prefetch -ansi-alias

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)

-O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32

-opt-prefetch -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc

-opt-malloc-options=3 -auto-ilp32

429.mcf: -xCORE-AVX2 -ipo -O3 -no-prec-div -parallel

-opt-prefetch -auto-p32

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)

-ansi-alias

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 5



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Lenovo Group Limited**

**SPECint2006 = 53.1**

Lenovo NeXtScale nx360 M5  
(Intel Xeon E5-2630L v3, 1.80 GHz)

**SPECint\_base2006 = 50.9**

**CPU2006 license:** 9017

**Test date:** Jun-2015

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** Nov-2014

**Tested by:** Lenovo Group Limited

**Software Availability:** Sep-2014

## Peak Optimization Flags (Continued)

456.hmmr: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
-ansi-alias

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-ra-region-strategy=block -ansi-alias  
-Wl,-z,muldefs -L/sh -lsmarheap

473.astar: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-auto-p32 -Wl,-z,muldefs -L/sh -lsmarheap64

483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-ansi-alias -Wl,-z,muldefs -L/sh -lsmarheap

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-HSW-B.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-HSW-B.xml>



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo NeXtScale nx360 M5  
(Intel Xeon E5-2630L v3, 1.80 GHz)

**SPECint2006 = 53.1**

**SPECint\_base2006 = 50.9**

**CPU2006 license:** 9017

**Test sponsor:** Lenovo Group Limited

**Tested by:** Lenovo Group Limited

**Test date:** Jun-2015

**Hardware Availability:** Nov-2014

**Software Availability:** Sep-2014

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Mon Aug 10 10:50:56 2015 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 10 August 2015.