



SPEC[®] CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5018D-MTF
(X10SLM-F, Intel Xeon E3-1231 v3, 3.40 GHz)

SPECfp[®]_rate2006 = 154

SPECfp_rate_base2006 = 149

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Sep-2015

Hardware Availability: May-2014

Software Availability: Sep-2014

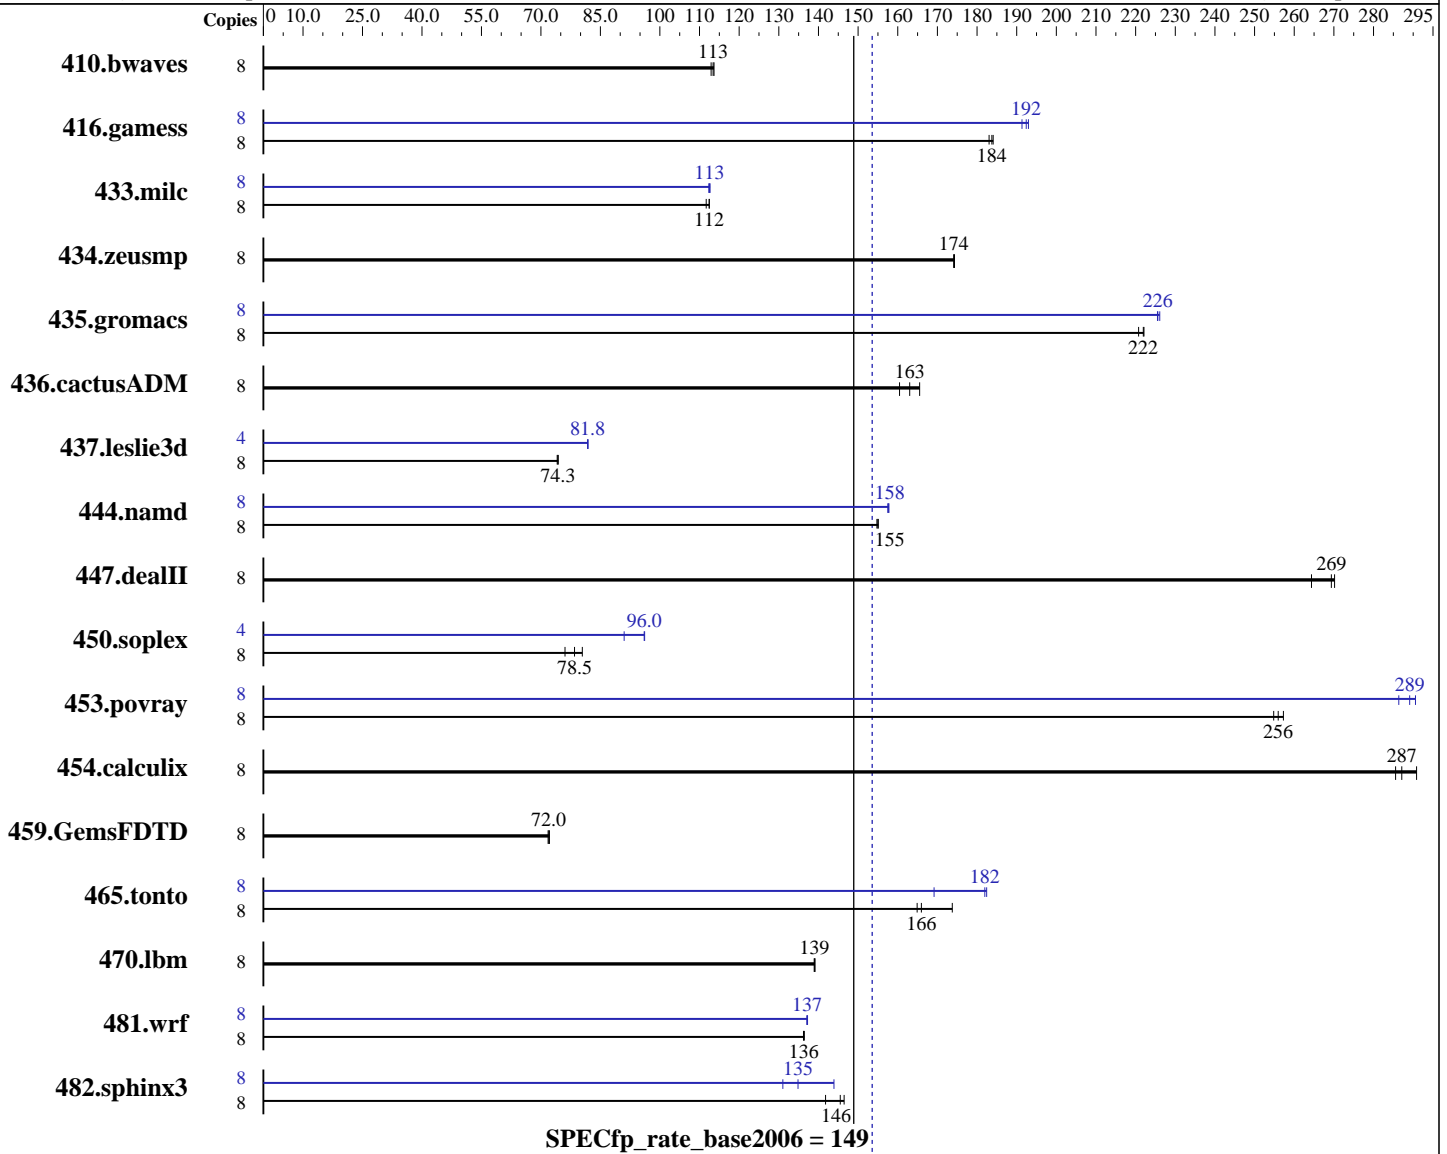

Hardware

CPU Name: Intel Xeon E3-1231 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz
 CPU MHz: 3400
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 7.1, Kernel 3.10.0-229.el7.x86_64
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: xfs
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5018D-MTF
(X10SLM-F, Intel Xeon E3-1231 v3, 3.40 GHz)

SPECfp_rate2006 = 154

SPECfp_rate_base2006 = 149

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Sep-2015

Hardware Availability: May-2014

Software Availability: Sep-2014

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 16 GB (2 x 8 GB 2Rx8 PC3-12800E-11, ECC)
Disk Subsystem: 1 x 1024 GB SATA III, 7200 RPM
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	957	114	<u>959</u>	<u>113</u>	963	113	8	957	114	<u>959</u>	<u>113</u>	963	113
416.gamess	8	<u>853</u>	<u>184</u>	851	184	856	183	8	<u>814</u>	<u>192</u>	812	193	819	191
433.milc	8	653	112	658	112	<u>653</u>	<u>112</u>	8	652	113	654	112	<u>653</u>	<u>113</u>
434.zeusmp	8	<u>418</u>	<u>174</u>	418	174	418	174	8	<u>418</u>	<u>174</u>	418	174	418	174
435.gromacs	8	259	221	<u>257</u>	<u>222</u>	257	222	8	253	226	253	226	<u>253</u>	<u>226</u>
436.cactusADM	8	<u>586</u>	<u>163</u>	578	166	596	160	8	<u>586</u>	<u>163</u>	578	166	596	160
437.leslie3d	8	1011	74.4	1015	74.1	<u>1012</u>	<u>74.3</u>	4	459	81.9	<u>460</u>	<u>81.8</u>	460	81.8
444.namd	8	414	155	415	155	<u>414</u>	<u>155</u>	8	407	157	<u>407</u>	<u>158</u>	407	158
447.dealII	8	339	270	<u>340</u>	<u>269</u>	346	264	8	339	270	<u>340</u>	<u>269</u>	346	264
450.soplex	8	877	76.1	<u>850</u>	<u>78.5</u>	829	80.4	4	367	91.0	<u>347</u>	<u>96.0</u>	347	96.2
453.povray	8	167	255	165	257	<u>166</u>	<u>256</u>	8	<u>147</u>	<u>289</u>	149	286	146	291
454.calculix	8	231	286	227	291	<u>230</u>	<u>287</u>	8	231	286	227	291	<u>230</u>	<u>287</u>
459.GemsFDTD	8	<u>1179</u>	<u>72.0</u>	1176	72.2	1182	71.8	8	<u>1179</u>	<u>72.0</u>	1176	72.2	1182	71.8
465.tonto	8	477	165	453	174	<u>474</u>	<u>166</u>	8	432	182	465	169	<u>433</u>	<u>182</u>
470.lbm	8	<u>791</u>	<u>139</u>	791	139	790	139	8	<u>791</u>	<u>139</u>	791	139	790	139
481.wrf	8	655	136	<u>656</u>	<u>136</u>	656	136	8	652	137	<u>651</u>	<u>137</u>	651	137
482.sphinx3	8	<u>1072</u>	<u>146</u>	1100	142	1064	146	8	<u>1156</u>	<u>135</u>	1190	131	1083	144

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

Sysinfo program /usr/cpu2006/config/sysinfo.rev6914
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
running on SYS-5018D-MTF Wed Sep 16 19:49:23 2015

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5018D-MTF
(X10SLM-F, Intel Xeon E3-1231 v3, 3.40 GHz)

SPECfp_rate2006 = 154

SPECfp_rate_base2006 = 149

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Sep-2015
Hardware Availability: May-2014
Software Availability: Sep-2014

Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name      : Intel(R) Xeon(R) CPU E3-1231 v3 @ 3.40GHz
 1 "physical id"s (chips)
 8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores    : 4
  siblings     : 8
  physical 0   : cores 0 1 2 3
cache size     : 8192 KB
```

```
From /proc/meminfo
MemTotal:      16392956 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.1 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.1"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.1 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.1:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.1:ga:server
```

```
uname -a:
Linux SYS-5018D-MTF 3.10.0-229.el7.x86_64 #1 SMP Thu Jan 29 18:37:38 EST 2015
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Sep 15 10:23
```

```
SPEC is set to: /usr/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       xfs   928G  30G  898G   4% /
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5018D-MTF
(X10SLM-F, Intel Xeon E3-1231 v3, 3.40 GHz)

SPECfp_rate2006 = 154

SPECfp_rate_base2006 = 149

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Sep-2015
Hardware Availability: May-2014
Software Availability: Sep-2014

Platform Notes (Continued)

BIOS American Megatrends Inc. 2.0 09/11/2015
Memory:
2x Samsung M391B1G73BH0-CK0 8 GB 2 rank 1600 MHz
2x [Empty] [Empty]

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB
memory using RedHat EL 7.0
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5018D-MTF
(X10SLM-F, Intel Xeon E3-1231 v3, 3.40 GHz)

SPECfp_rate2006 = 154

SPECfp_rate_base2006 = 149

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Sep-2015

Hardware Availability: May-2014

Software Availability: Sep-2014

Base Portability Flags (Continued)

465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5018D-MTF
(X10SLM-F, Intel Xeon E3-1231 v3, 3.40 GHz)

SPECfp_rate2006 = 154

SPECfp_rate_base2006 = 149

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Sep-2015

Hardware Availability: May-2014

Software Availability: Sep-2014

Peak Portability Flags (Continued)

```

434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2)
         -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
         -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3
            -unroll2

```

C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
         -O3(pass 2) -no-prec-div(pass 2)
         -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias
         -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
          -O3(pass 2) -no-prec-div(pass 2)
          -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
          -opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
          -O3(pass 2) -no-prec-div(pass 2)
          -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4
          -ansi-alias

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5018D-MTF
(X10SLM-F, Intel Xeon E3-1231 v3, 3.40 GHz)

SPECfp_rate2006 = 154

SPECfp_rate_base2006 = 149

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Sep-2015
Hardware Availability: May-2014
Software Availability: Sep-2014

Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2)
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revG.20141230.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revG.20141230.00.xml>



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5018D-MTF
(X10SLM-F, Intel Xeon E3-1231 v3, 3.40 GHz)

SPECfp_rate2006 = 154

SPECfp_rate_base2006 = 149

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Sep-2015

Hardware Availability: May-2014

Software Availability: Sep-2014

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Oct 20 16:25:58 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 20 October 2015.