



SPEC[®] CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp[®]2006 = **112**

Express5800/E120g-M (Intel Xeon E5-2630 v4)

SPECfp_base2006 = **106**

CPU2006 license: 9006


Test date: Mar-2016

Test sponsor: NEC Corporation

Hardware Availability: Apr-2016

Tested by: NEC Corporation

Software Availability: Nov-2015

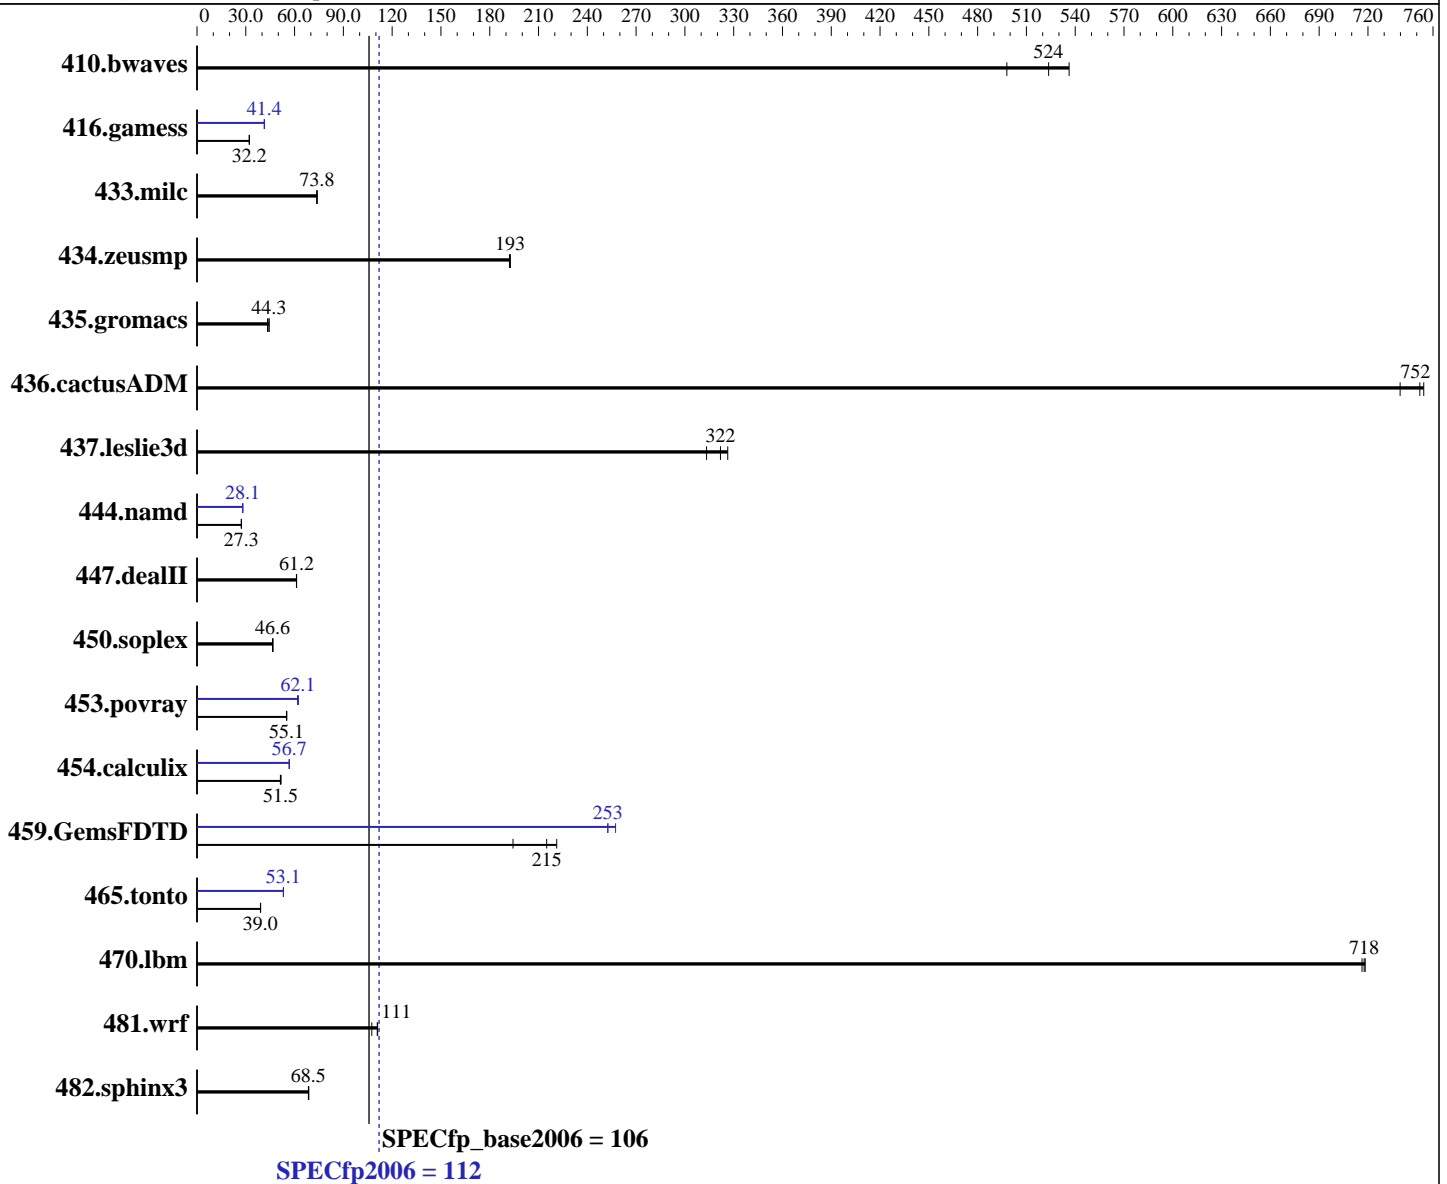

Hardware	
CPU Name:	Intel Xeon E5-2630 v4
CPU Characteristics:	Intel Turbo Boost Technology up to 3.10 GHz
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	20 cores, 2 chips, 10 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Software	
Operating System:	Red Hat Enterprise Linux Server release 7.2 (Maipo) Kernel 3.10.0-327.el7.x86_64
Compiler:	C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux; Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
Auto Parallel:	Yes
File System:	ext4

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = **112**

Express5800/E120g-M (Intel Xeon E5-2630 v4)

SPECfp_base2006 = **106**

CPU2006 license: 9006

Test date: Mar-2016

Test sponsor: NEC Corporation

Hardware Availability: Apr-2016

Tested by: NEC Corporation

Software Availability: Nov-2015

L3 Cache: 25 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R, running at 2133 MHz)
 Disk Subsystem: 1 x 1 TB SATA, 7200 RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	25.3	536	27.3	498	26.0	524	25.3	536	27.3	498	26.0	524
416.gamess	608	32.2	609	32.1	608	32.2	473	41.4	473	41.4	472	41.5
433.milc	124	73.8	125	73.7	124	73.9	124	73.8	125	73.7	124	73.9
434.zeusmp	47.4	192	47.3	193	47.3	193	47.4	192	47.3	193	47.3	193
435.gromacs	165	43.4	161	44.3	161	44.3	165	43.4	161	44.3	161	44.3
436.cactusADM	15.9	752	16.2	740	15.8	754	15.9	752	16.2	740	15.8	754
437.leslie3d	28.8	326	30.0	313	29.2	322	28.8	326	30.0	313	29.2	322
444.namd	294	27.3	294	27.3	294	27.3	285	28.1	285	28.1	285	28.1
447.dealII	187	61.2	187	61.2	187	61.2	187	61.2	187	61.2	187	61.2
450.soplex	179	46.7	179	46.5	179	46.6	179	46.7	179	46.5	179	46.6
453.povray	96.5	55.1	96.4	55.2	96.7	55.0	85.4	62.3	86.1	61.8	85.7	62.1
454.calculix	160	51.6	161	51.3	160	51.5	145	56.7	145	56.7	145	56.8
459.GemsFDTD	49.3	215	48.0	221	54.6	194	41.2	257	42.0	253	42.0	253
465.tonto	251	39.1	252	39.0	252	39.0	185	53.1	185	53.1	185	53.2
470.lbm	19.2	716	19.1	718	19.1	718	19.2	716	19.1	718	19.1	718
481.wrf	101	111	101	111	104	107	101	111	101	111	104	107
482.sphinx3	284	68.5	284	68.5	283	68.8	284	68.5	284	68.5	283	68.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:
 Power Management Policy: Custom
 Energy Performance: Performance
 Patrol Scrub: Disabled
 Snoop Mode: Home Snoop with Directory
 Hyper-Threading: Disabled



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 112

Express5800/E120g-M (Intel Xeon E5-2630 v4)

SPECfp_base2006 = 106

CPU2006 license: 9006

Test date: Mar-2016

Test sponsor: NEC Corporation

Hardware Availability: Apr-2016

Tested by: NEC Corporation

Software Availability: Nov-2015

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

OMP_NUM_THREADS = "20"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 112

Express5800/E120g-M (Intel Xeon E5-2630 v4)

SPECfp_base2006 = 106

CPU2006 license: 9006

Test date: Mar-2016

Test sponsor: NEC Corporation

Hardware Availability: Apr-2016

Tested by: NEC Corporation

Software Availability: Nov-2015

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 112

Express5800/E120g-M (Intel Xeon E5-2630 v4)

SPECfp_base2006 = 106

CPU2006 license: 9006

Test date: Mar-2016

Test sponsor: NEC Corporation

Hardware Availability: Apr-2016

Tested by: NEC Corporation

Software Availability: Nov-2015

Peak Optimization Flags (Continued)

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECfp2006 = 112

Express5800/E120g-M (Intel Xeon E5-2630 v4)

SPECfp_base2006 = 106

CPU2006 license: 9006

Test date: Mar-2016

Test sponsor: NEC Corporation

Hardware Availability: Apr-2016

Tested by: NEC Corporation

Software Availability: Nov-2015

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-120g-RevB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-120g-RevB.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jun 30 13:12:22 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 April 2016.