



# SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 210 X6 (Intel Xeon E5-2640 v4, 2.40 GHz)

SPECfp®\_rate2006 = 711

SPECfp\_rate\_base2006 = 694

CPU2006 license: 9008


Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Nov-2016

Hardware Availability: Mar-2016

Software Availability: Mar-2016

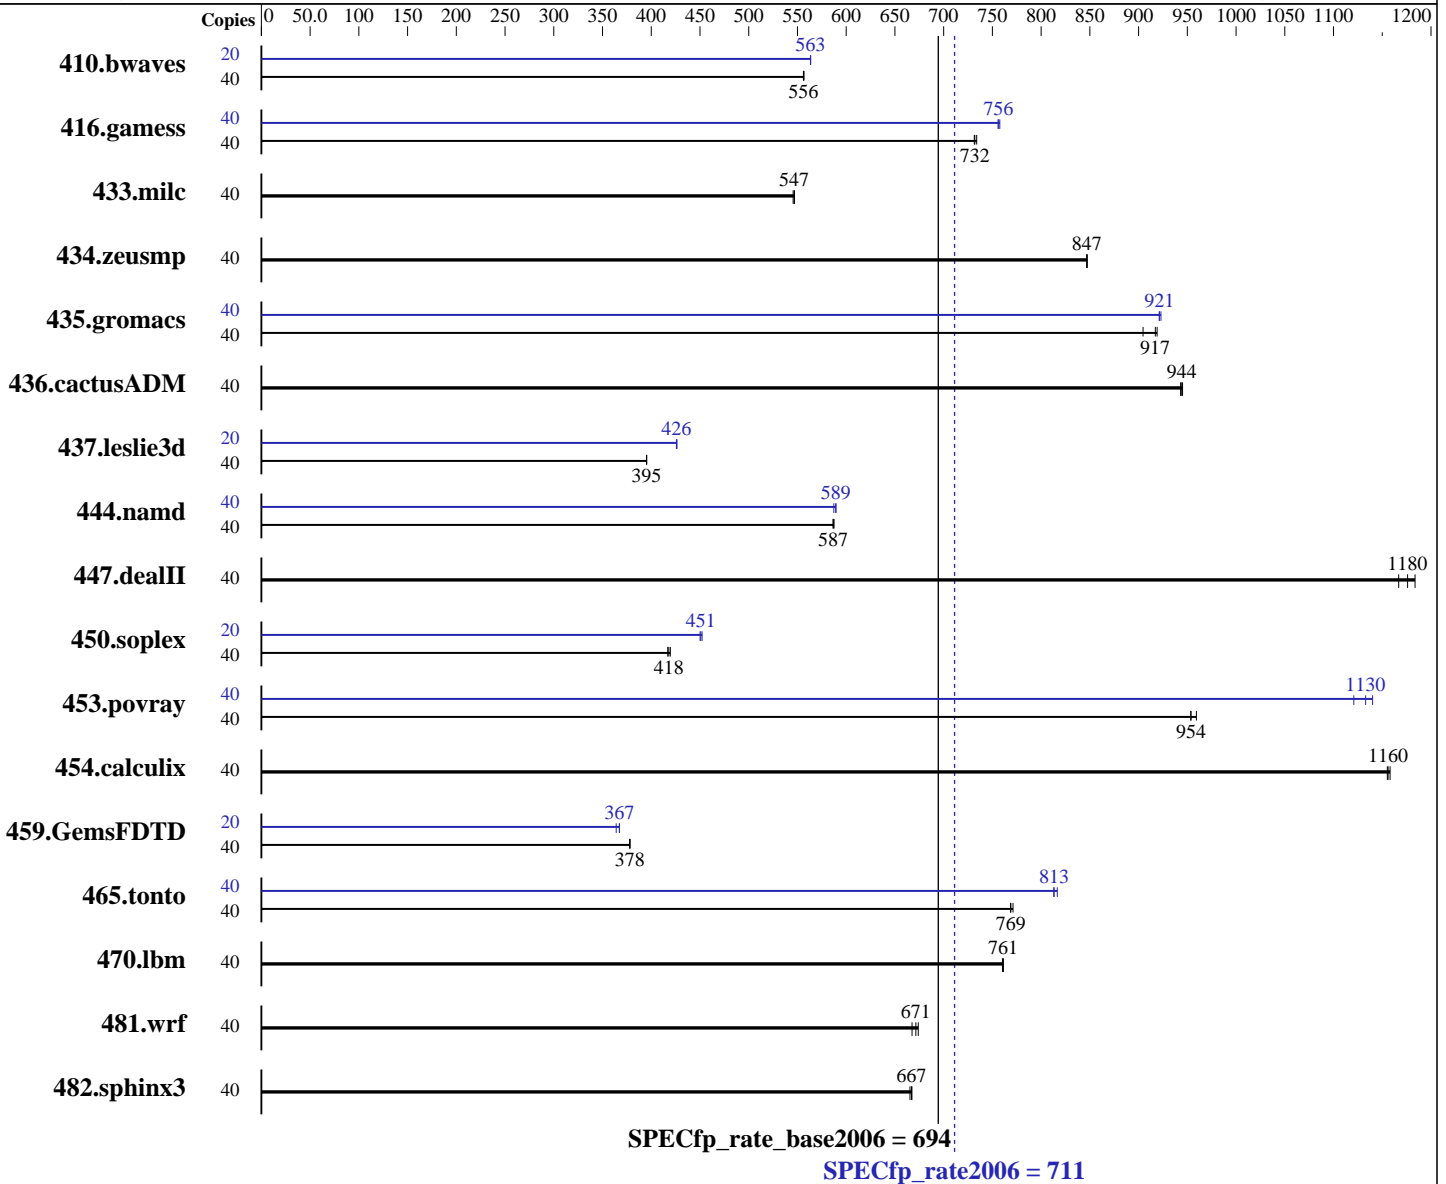

### Hardware

CPU Name: Intel Xeon E5-2640 v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.40 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 7.2 (Maipo)  
 3.10.0-327.18.2.el7.x86\_64  
 Compiler: C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 17.0.0.098 of Intel Fortran Compiler for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 210 X6 (Intel Xeon E5-2640 v4, 2.40 GHz)

SPECfp\_rate2006 = **711**

SPECfp\_rate\_base2006 = **694**

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Nov-2016

Hardware Availability: Mar-2016

Software Availability: Mar-2016

L3 Cache: 25 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R, running at 2133 MHz)  
Disk Subsystem: 1 x 240 GB SATA II SSD  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	40	<b>977</b>	<b>556</b>	976	557	978	556	20	<b>482</b>	<b>563</b>	482	563	482	564
416.gamess	40	1071	731	<b>1070</b>	<b>732</b>	1067	734	40	<b>1035</b>	<b>756</b>	1036	756	1034	758
433.milc	40	673	546	671	547	<b>672</b>	<b>547</b>	40	673	546	671	547	<b>672</b>	<b>547</b>
434.zeusmp	40	430	847	430	847	<b>430</b>	<b>847</b>	40	430	847	430	847	<b>430</b>	<b>847</b>
435.gromacs	40	<b>311</b>	<b>917</b>	316	905	311	919	40	310	921	<b>310</b>	<b>921</b>	309	923
436.cactusADM	40	<b>506</b>	<b>944</b>	507	943	506	945	40	<b>506</b>	<b>944</b>	507	943	506	945
437.leslie3d	40	<b>951</b>	<b>395</b>	952	395	951	395	20	442	426	441	426	<b>441</b>	<b>426</b>
444.namd	40	546	588	<b>547</b>	<b>587</b>	547	587	40	<b>544</b>	<b>589</b>	546	587	544	590
447.dealII	40	387	1180	<b>389</b>	<b>1180</b>	392	1170	40	387	1180	<b>389</b>	<b>1180</b>	392	1170
450.soplex	40	795	420	<b>798</b>	<b>418</b>	800	417	20	369	452	371	450	<b>370</b>	<b>451</b>
453.povray	40	223	954	222	959	<b>223</b>	<b>954</b>	40	187	1140	<b>188</b>	<b>1130</b>	190	1120
454.calculix	40	285	1160	<b>285</b>	<b>1160</b>	286	1160	40	285	1160	<b>285</b>	<b>1160</b>	286	1160
459.GemsFDTD	40	1122	378	1123	378	<b>1123</b>	<b>378</b>	20	578	367	<b>578</b>	<b>367</b>	583	364
465.tonto	40	512	769	510	771	<b>512</b>	<b>769</b>	40	<b>484</b>	<b>813</b>	482	817	484	813
470.lbm	40	<b>722</b>	<b>761</b>	722	761	723	760	40	<b>722</b>	<b>761</b>	722	761	723	760
481.wrf	40	669	668	<b>665</b>	<b>671</b>	663	674	40	669	668	<b>665</b>	<b>671</b>	663	674
482.sphinx3	40	<b>1169</b>	<b>667</b>	1172	665	1168	667	40	<b>1169</b>	<b>667</b>	1172	665	1168	667

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Bios Settings:  
Intel(R) Hyper-Threading Tech = Enabled  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 210 X6 (Intel Xeon E5-2640 v4, 2.40 GHz)

SPECfp\_rate2006 = 711

SPECfp\_rate\_base2006 = 694

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Nov-2016

Hardware Availability: Mar-2016

Software Availability: Mar-2016

### Platform Notes (Continued)

Power & Performance = Performance  
Enforce POR = Disabled  
Memory Operating Speed Selection = 2133  
Set FAN Profile = Performance  
Fan PWM Offset = 0

Sysinfo program /cpu2006.1.2/config/sysinfo.rev6993  
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)  
running on SUT Tue Nov 22 23:46:39 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2640 v4 @ 2.40GHz
 2 "physical id"s (chips)
 40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 10
  siblings  : 20
  physical 0: cores 0 1 2 3 4 8 9 10 11 12
  physical 1: cores 0 1 2 3 4 8 9 10 11 12
cache size : 25600 KB
```

```
From /proc/meminfo
MemTotal:      263860776 kB
HugePages_Total:      1
Hugepagesize:    2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.2 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.2"
PRETTY_NAME="Red Hat Enterprise Linux"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
os-release.rpmsave:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.0 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.0"
PRETTY_NAME="Red Hat Enterprise Linux"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 210 X6 (Intel Xeon E5-2640 v4, 2.40 GHz)

SPECfp\_rate2006 = 711

SPECfp\_rate\_base2006 = 694

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Nov-2016

Hardware Availability: Mar-2016

Software Availability: Mar-2016

## Platform Notes (Continued)

```
system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server
```

```
uname -a:
Linux SUT 3.10.0-327.18.2.el7.x86_64 #2 SMP Wed Jun 1 17:37:13 CEST 2016
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Nov 22 12:35
```

SPEC is set to: /cpu2006.1.2

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal        ext4  212G  45G  157G  23% /
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Intel Corporation SE5C610.86B.01.01.0019.101220160604 10/12/2016

Memory:

```
16x Hynix HMA42GR7AFR4N-UH 16 GB 2 rank 2400 MHz, configured at 2134 MHz
8x NO DIMM NO DIMM
```

(End of data from sysinfo program)

dmidecode does not properly detect memory modules

16 modules of 16 GB were used to run the test (256 GB total)

## General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64:/cpu2006.1.2/sh10.2"
```

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled by default

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**ACTION S.A.**

ACTINA SOLAR 210 X6 (Intel Xeon E5-2640 v4, 2.40 GHz)

**SPECfp\_rate2006 = 711**

**SPECfp\_rate\_base2006 = 694**

**CPU2006 license:** 9008

**Test sponsor:** ACTION S.A.

**Tested by:** ACTION S.A.

**Test date:** Nov-2016

**Hardware Availability:** Mar-2016

**Software Availability:** Mar-2016

## Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**ACTION S.A.**

ACTINA SOLAR 210 X6 (Intel Xeon E5-2640 v4, 2.40 GHz)

**SPECfp\_rate2006 = 711**

**SPECfp\_rate\_base2006 = 694**

**CPU2006 license:** 9008

**Test sponsor:** ACTION S.A.

**Tested by:** ACTION S.A.

**Test date:** Nov-2016

**Hardware Availability:** Mar-2016

**Software Availability:** Mar-2016

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2017/linux/lib/ia32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.deallI: -DSPEC\_CPU\_LP64  
 450.soplex: -D\_FILE\_OFFSET\_BITS=64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**ACTION S.A.**

**SPECfp\_rate2006 = 711**

ACTINA SOLAR 210 X6 (Intel Xeon E5-2640 v4, 2.40 GHz)

**SPECfp\_rate\_base2006 = 694**

**CPU2006 license:** 9008

**Test date:** Nov-2016

**Test sponsor:** ACTION S.A.

**Hardware Availability:** Mar-2016

**Tested by:** ACTION S.A.

**Software Availability:** Mar-2016

## Peak Optimization Flags (Continued)

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -fno-alias -auto-ilp32  
-qopt-mem-layout-trans=3

447.dealII: basepeak = yes

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -qopt-malloc-options=3  
-qopt-mem-layout-trans=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

### Fortran benchmarks:

410.bwaves: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: Same as 410.bwaves

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -auto -inline-calloc  
-qopt-malloc-options=3

### Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32  
-qopt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 210 X6 (Intel Xeon E5-2640 v4, 2.40 GHz)

**SPECfp\_rate2006 = 711**

**SPECfp\_rate\_base2006 = 694**

**CPU2006 license:** 9008

**Test sponsor:** ACTION S.A.

**Tested by:** ACTION S.A.

**Test date:** Nov-2016

**Hardware Availability:** Mar-2016

**Software Availability:** Mar-2016

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevB-aug-2015-For-Intel-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevB-aug-2015-For-Intel-Platform.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Dec 15 11:16:26 2016 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 13 December 2016.