



SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3250 M6
(3.40 GHz, Intel Xeon E3-1230 v5)

SPECfp®2006 = **97.7**

SPECfp_base2006 = **95.7**

CPU2006 license: 9017


Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Nov-2016

Hardware Availability: Apr-2016

Software Availability: Mar-2016

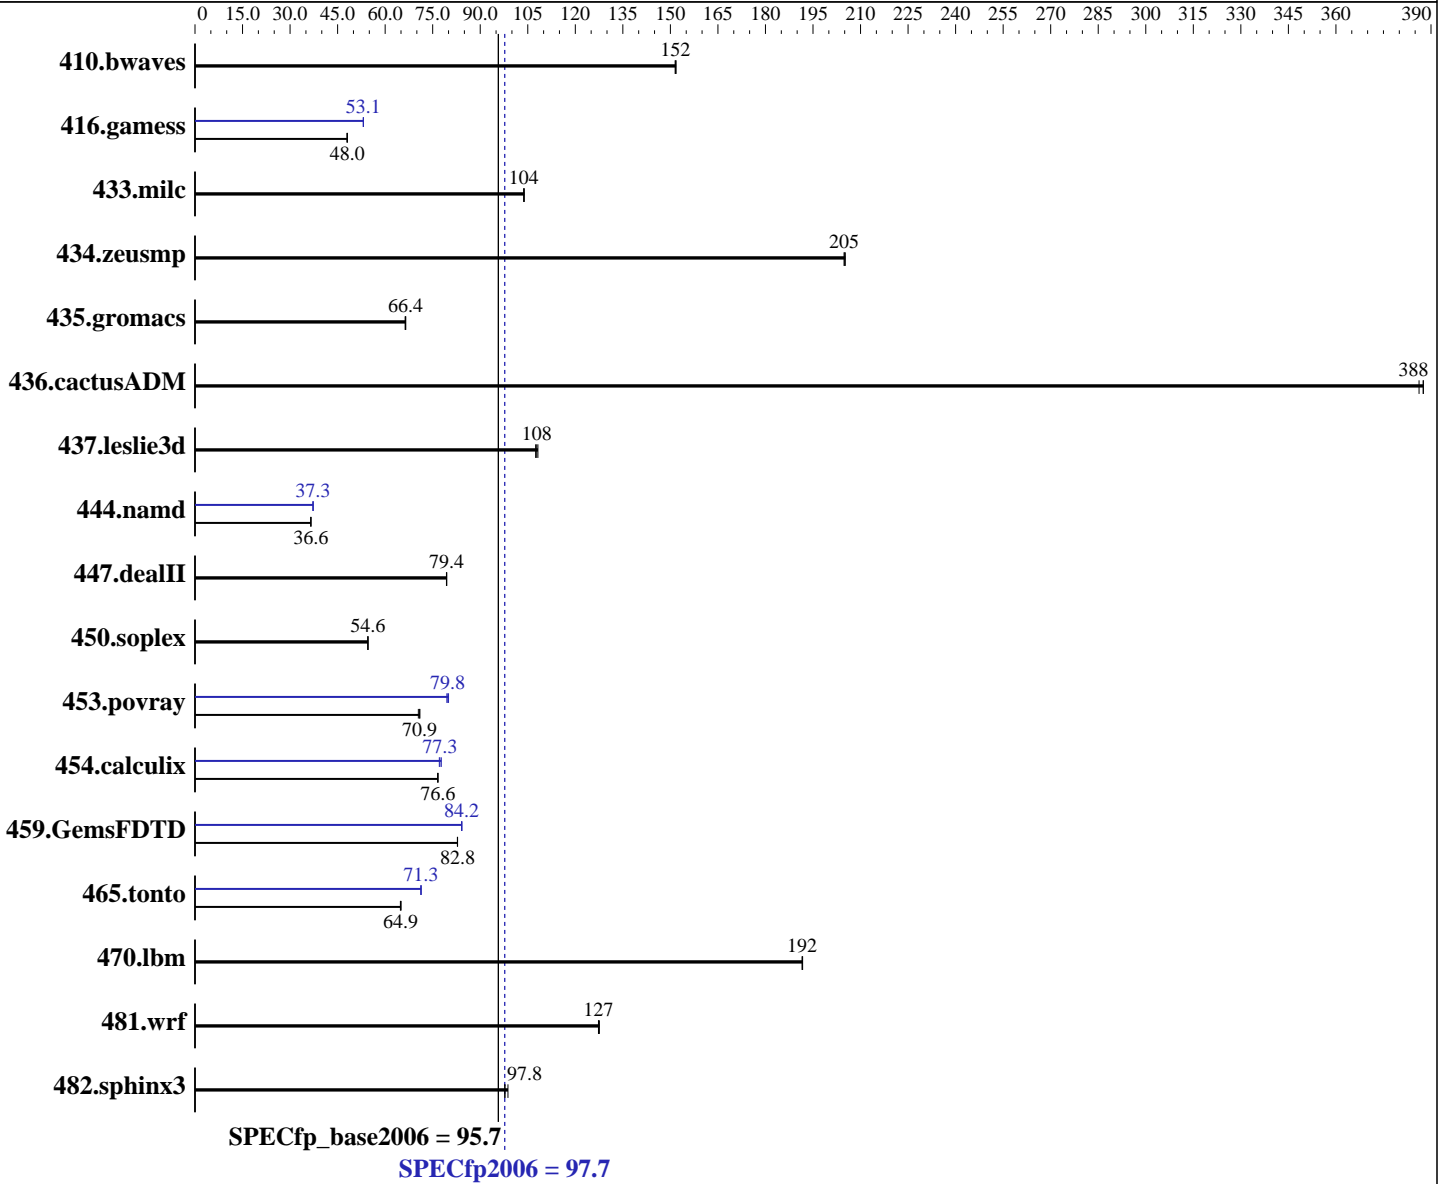

Hardware

CPU Name: Intel Xeon E3-1230 v5
 CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz
 CPU MHz: 3400
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 12 SP1 (x86_64)
 Kernel 3.12.49-11-default
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: xfs
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = **97.7**

Lenovo System x3250 M6
(3.40 GHz, Intel Xeon E3-1230 v5)

SPECfp_base2006 = **95.7**

CPU2006 license: 9017

Test date: Nov-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Apr-2016

Tested by: Lenovo Group Limited

Software Availability: Mar-2016

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 16 GB (2 x 8 GB 2Rx8 PC4-2133P-E)
Disk Subsystem: 1 x 800 GB SATA SSD
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	89.5	152	89.7	152	89.6	152	89.5	152	89.7	152	89.6	152
416.gamess	407	48.1	408	48.0	408	48.0	368	53.2	369	53.1	369	53.1
433.milc	88.4	104	88.5	104	88.5	104	88.4	104	88.5	104	88.5	104
434.zeusmp	44.3	205	44.4	205	44.4	205	44.3	205	44.4	205	44.4	205
435.gromacs	108	66.3	107	66.5	107	66.4	108	66.3	107	66.5	107	66.4
436.cactusADM	30.8	388	30.9	386	30.8	388	30.8	388	30.9	386	30.8	388
437.leslie3d	86.9	108	87.2	108	87.5	107	86.9	108	87.2	108	87.5	107
444.namd	220	36.5	219	36.6	219	36.6	215	37.3	216	37.2	215	37.3
447.dealII	144	79.3	144	79.4	144	79.4	144	79.3	144	79.4	144	79.4
450.soplex	153	54.6	153	54.6	153	54.5	153	54.6	153	54.6	153	54.5
453.povray	75.0	70.9	75.5	70.5	75.1	70.9	66.7	79.8	66.5	80.0	66.9	79.5
454.calculix	108	76.6	108	76.7	108	76.6	107	77.3	106	77.7	107	77.1
459.GemsFDTD	128	82.8	128	82.8	128	82.8	126	84.2	126	84.1	126	84.2
465.tonto	151	65.0	152	64.8	152	64.9	138	71.3	138	71.3	138	71.4
470.lbm	71.7	192	71.7	192	71.7	192	71.7	192	71.7	192	71.7	192
481.wrf	87.7	127	87.5	128	87.7	127	87.7	127	87.5	128	87.7	127
482.sphinx3	197	98.7	199	97.8	199	97.7	197	98.7	199	97.8	199	97.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled

Platform Notes

BIOS Configuration:
Operating Modes set to Maximum Performance
Hyper-Threading set to Disabled
Sysinfo program /home/cpu2006-1.2-ic16.0/config/sysinfo.rev6914
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
running on x3250-02 Fri Nov 25 09:09:34 2016

This section contains SUT (System Under Test) info as seen by
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

Lenovo System x3250 M6
(3.40 GHz, Intel Xeon E3-1230 v5)

SPECfp2006 = 97.7

SPECfp_base2006 = 95.7

CPU2006 license: 9017

Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Nov-2016

Hardware Availability: Apr-2016

Software Availability: Mar-2016

Platform Notes (Continued)

some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E3-1230 v5 @ 3.40GHz

1 "physical id"s (chips)

4 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 4

siblings : 4

physical 0: cores 0 1 2 3

cache size : 8192 KB

From /proc/meminfo

MemTotal: 16421272 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

SuSE-release:

SUSE Linux Enterprise Server 12 (x86_64)

VERSION = 12

PATCHLEVEL = 1

This file is deprecated and will be removed in a future service pack or release.

Please check /etc/os-release for details about this release.

os-release:

NAME="SLES"

VERSION="12-SP1"

VERSION_ID="12.1"

PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"

ID="sles"

ANSI_COLOR="0;32"

CPE_NAME="cpe:/o:suse:sles:12:sp1"

uname -a:

Linux x3250-02 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Nov 25 04:50

SPEC is set to: /home/cpu2006-1.2-ic16.0

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	xfs	691G	3.9G	688G	1%	/home

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 97.7

Lenovo System x3250 M6
(3.40 GHz, Intel Xeon E3-1230 v5)

SPECfp_base2006 = 95.7

CPU2006 license: 9017

Test date: Nov-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Apr-2016

Tested by: Lenovo Group Limited

Software Availability: Mar-2016

Platform Notes (Continued)

BIOS LENOVO -[M3E107GUS-1.20]- 10/28/2016

Memory:

2x NO DIMM Unknown

2x Samsung M391A1G43EB1-CPB 8 GB 2 rank 2133 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/home/cpu2006-1.2-ic16.0/libs/32:/home/cpu2006-1.2-ic16.0/libs/64:/home/cpu2006-1.2-ic16.0/sh"

OMP_NUM_THREADS = "4"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB
memory using RedHat EL 7.1

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64 -nofor_main

436.cactusADM: -DSPEC_CPU_LP64 -nofor_main

437.leslie3d: -DSPEC_CPU_LP64

444.namd: -DSPEC_CPU_LP64

447.dealII: -DSPEC_CPU_LP64

450.soplex: -DSPEC_CPU_LP64

453.povray: -DSPEC_CPU_LP64

454.calculix: -DSPEC_CPU_LP64 -nofor_main

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 97.7

Lenovo System x3250 M6
(3.40 GHz, Intel Xeon E3-1230 v5)

SPECfp_base2006 = 95.7

CPU2006 license: 9017

Test date: Nov-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Apr-2016

Tested by: Lenovo Group Limited

Software Availability: Mar-2016

Base Portability Flags (Continued)

459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 97.7

Lenovo System x3250 M6
(3.40 GHz, Intel Xeon E3-1230 v5)

SPECfp_base2006 = 95.7

CPU2006 license: 9017

Test date: Nov-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Apr-2016

Tested by: Lenovo Group Limited

Software Availability: Mar-2016

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 97.7

Lenovo System x3250 M6
(3.40 GHz, Intel Xeon E3-1230 v5)

SPECfp_base2006 = 95.7

CPU2006 license: 9017

Test date: Nov-2016

Test sponsor: Lenovo Group Limited

Hardware Availability: Apr-2016

Tested by: Lenovo Group Limited

Software Availability: Mar-2016

Peak Optimization Flags (Continued)

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-BDW-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Settings-V1.2-BDW-revC.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Dec 15 11:18:22 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 13 December 2016.