



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Dell Inc.

SPECfp<sup>®</sup>\_rate2006 = 629

PowerEdge C6420 (Intel Xeon Silver 4108, 1.80 GHz)

SPECfp\_rate\_base2006 = 615

CPU2006 license: 55


Test date: Jun-2017

Test sponsor: Dell Inc.

Hardware Availability: Jul-2017

Tested by: Dell Inc.

Software Availability: Jul-2017

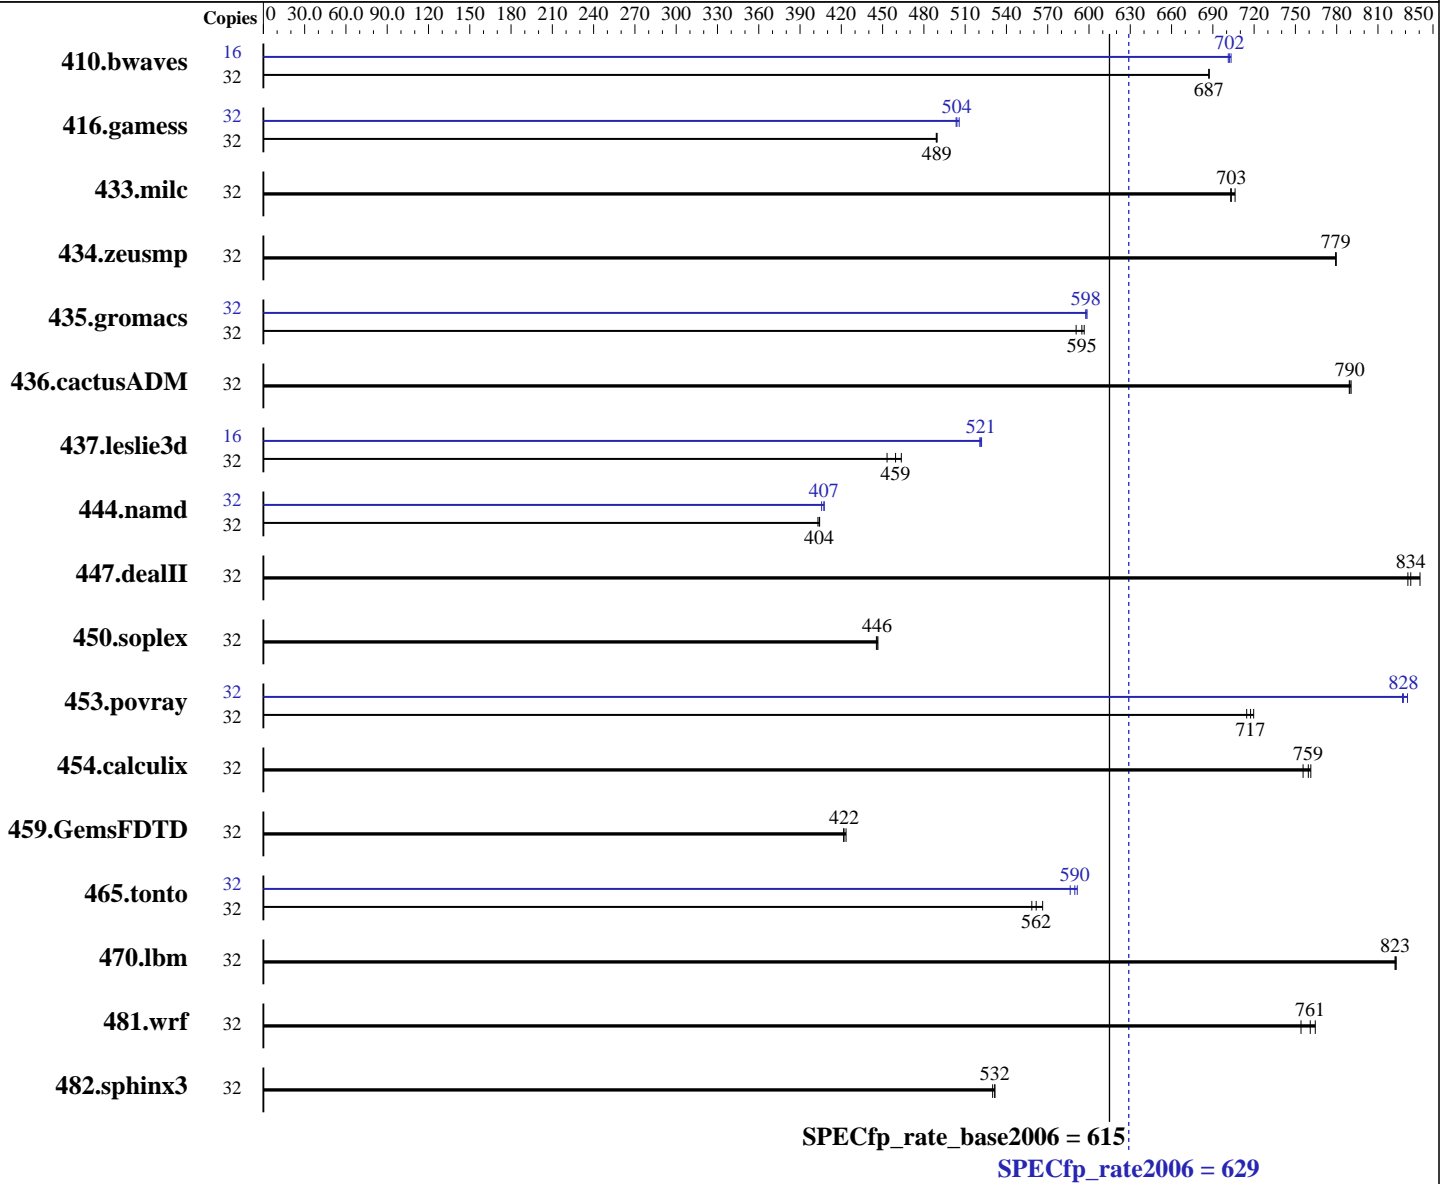

### Hardware

CPU Name: Intel Xeon Silver 4108  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz  
 CPU MHz: 1800  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 12 SP2  
 4.4.21-69-default  
 Compiler: C/C++: Version 17.0.3.191 of Intel C/C++  
 Compiler for Linux;  
 Fortran: Version 17.0.3.191 of Intel Fortran  
 Compiler for Linux  
 Auto Parallel: Yes  
 File System: ext4  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 629

PowerEdge C6420 (Intel Xeon Silver 4108, 1.80 GHz)

SPECfp\_rate\_base2006 = 615

CPU2006 license: 55

Test date: Jun-2017

Test sponsor: Dell Inc.

Hardware Availability: Jul-2017

Tested by: Dell Inc.

Software Availability: Jul-2017

L3 Cache: 11 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 192 GB (12 x 16 GB 2Rx8 PC4-2666V-R, running at 2400 MT/s)  
 Disk Subsystem: 1 x 960 GB SATA SSD  
 Other Hardware: None

Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	32	633	687	<b>633</b>	<b>687</b>	633	687	16	310	701	<b>310</b>	<b>702</b>	309	703		
416.gamess	32	1280	490	1281	489	<b>1280</b>	<b>489</b>	32	1245	503	<b>1243</b>	<b>504</b>	1239	506		
433.milc	32	418	703	<b>418</b>	<b>703</b>	416	706	32	418	703	<b>418</b>	<b>703</b>	416	706		
434.zeusmp	32	374	780	374	779	<b>374</b>	<b>779</b>	32	374	780	374	779	<b>374</b>	<b>779</b>		
435.gromacs	32	383	597	<b>384</b>	<b>595</b>	387	591	32	382	598	382	599	<b>382</b>	<b>598</b>		
436.cactusADM	32	<b>484</b>	<b>790</b>	485	789	484	790	32	<b>484</b>	<b>790</b>	485	789	484	790		
437.lelie3d	32	664	453	649	464	<b>655</b>	<b>459</b>	16	289	521	<b>289</b>	<b>521</b>	288	522		
444.namd	32	<b>635</b>	<b>404</b>	635	404	637	403	32	633	406	<b>630</b>	<b>407</b>	630	408		
447.dealII	32	440	832	436	841	<b>439</b>	<b>834</b>	32	440	832	436	841	<b>439</b>	<b>834</b>		
450.soplex	32	<b>598</b>	<b>446</b>	599	446	598	447	32	<b>598</b>	<b>446</b>	599	446	598	447		
453.povray	32	238	715	237	720	<b>237</b>	<b>717</b>	32	206	828	<b>205</b>	<b>828</b>	205	831		
454.calculix	32	347	761	<b>348</b>	<b>759</b>	349	756	32	347	761	<b>348</b>	<b>759</b>	349	756		
459.GemsFDTD	32	805	422	802	423	<b>805</b>	<b>422</b>	32	805	422	802	423	<b>805</b>	<b>422</b>		
465.tonto	32	<b>561</b>	<b>562</b>	564	558	556	566	32	<b>534</b>	<b>590</b>	532	591	537	586		
470.lbm	32	<b>535</b>	<b>823</b>	534	823	535	823	32	<b>535</b>	<b>823</b>	534	823	535	823		
481.wrf	32	474	754	468	764	<b>470</b>	<b>761</b>	32	474	754	468	764	<b>470</b>	<b>761</b>		
482.sphinx3	32	1173	532	1177	530	<b>1173</b>	<b>532</b>	32	1173	532	1177	530	<b>1173</b>	<b>532</b>		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS settings:  
Sub NUMA Cluster enabled  
Virtualization Technology disabled

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 629

PowerEdge C6420 (Intel Xeon Silver 4108, 1.80 GHz)

SPECfp\_rate\_base2006 = 615

CPU2006 license: 55

Test date: Jun-2017

Test sponsor: Dell Inc.

Hardware Availability: Jul-2017

Tested by: Dell Inc.

Software Availability: Jul-2017

## Platform Notes (Continued)

System Profile set to Custom  
 CPU Performance set to Maximum Performance  
 C States set to autonomous  
 C1E disabled  
 Energy Efficient Turbo disabled  
 Uncore Frequency set to Dynamic  
 Energy Efficiency Policy set to Performance  
 Memory Patrol Scrub disabled  
 Logical Processor enabled  
 CPU Interconnect Bus Link Power Management disabled  
 PCI ASPM L1 Link Power Management disabled  
 Sysinfo program /root/cpu2006-1.2\_ic17u3/config/sysinfo.rev6993  
 Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)  
 running on linux-38mh Thu Jun 22 17:36:53 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Silver 4108 CPU @ 1.80GHz
 2 "physical id"s (chips)
 32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 8
  siblings  : 16
  physical 0: cores 0 1 2 3 4 5 6 7
  physical 1: cores 0 1 2 3 4 5 6 7
cache size : 11264 KB
```

```
From /proc/meminfo
MemTotal:      196687624 kB
HugePages_Total:       0
Hugepagesize:       2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 629

PowerEdge C6420 (Intel Xeon Silver 4108, 1.80 GHz)

SPECfp\_rate\_base2006 = 615

CPU2006 license: 55

Test date: Jun-2017

Test sponsor: Dell Inc.

Hardware Availability: Jul-2017

Tested by: Dell Inc.

Software Availability: Jul-2017

## Platform Notes (Continued)

CPE\_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:

```
Linux linux-38mh 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
(9464f67) x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Jun 22 05:01

SPEC is set to: /root/cpu2006-1.2\_ic17u3

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        ext4  915G  8.4G  906G   1% /
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 1.1.1 06/05/2017

Memory:

```
12x 002C00B3002C 18ASF2G72PDZ-2G6D1 16 GB 2 rank 2666 MHz, configured at 2400
MHz
```

```
4x Not Specified Not Specified
```

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/root/cpu2006-1.2_ic17u3/lib/ia32:/root/cpu2006-1.2_ic17u3/lib/intel64:/root/cpu2006-1.2_ic17u3/sh10.2"
```

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled by default

Filesystem page cache cleared with:

```
shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
```

```
runspec command invoked through numactl i.e.:
```

```
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 629

PowerEdge C6420 (Intel Xeon Silver 4108, 1.80 GHz)

SPECfp\_rate\_base2006 = 615

CPU2006 license: 55

Test date: Jun-2017

Test sponsor: Dell Inc.

Hardware Availability: Jul-2017

Tested by: Dell Inc.

Software Availability: Jul-2017

## Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32  
-qopt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks:

icc -m64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 629

PowerEdge C6420 (Intel Xeon Silver 4108, 1.80 GHz)

SPECfp\_rate\_base2006 = 615

CPU2006 license: 55

Test date: Jun-2017

Test sponsor: Dell Inc.

Hardware Availability: Jul-2017

Tested by: Dell Inc.

Software Availability: Jul-2017

## Peak Compiler Invocation (Continued)

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -fno-alias -auto-ilp32  
-qopt-mem-layout-trans=3

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -qopt-mem-layout-trans=3

Fortran benchmarks:

410.bwaves: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp\_rate2006 = 629

PowerEdge C6420 (Intel Xeon Silver 4108, 1.80 GHz)

SPECfp\_rate\_base2006 = 615

CPU2006 license: 55

Test date: Jun-2017

Test sponsor: Dell Inc.

Hardware Availability: Jul-2017

Tested by: Dell Inc.

Software Availability: Jul-2017

## Peak Optimization Flags (Continued)

434.zeusmp: basepeak = yes

437.leslie3d: Same as 410.bwaves

459.GemsFDTD: basepeak = yes

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -auto -inline-calloc  
-qopt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -qopt-prefetch -auto-ilp32  
-qopt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Flags-PowerEdge14G-revB.20170725.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Flags-PowerEdge14G-revB.20170725.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Tue Jul 25 15:53:23 2017 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 25 July 2017.