



SPEC® CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Gold 6134, 3.20 GHz)

SPECint®2006 = 78.3

SPECint_base2006 = 75.0

CPU2006 license: 9019


Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Dec-2017

Hardware Availability: Aug-2017

Software Availability: Jun-2017

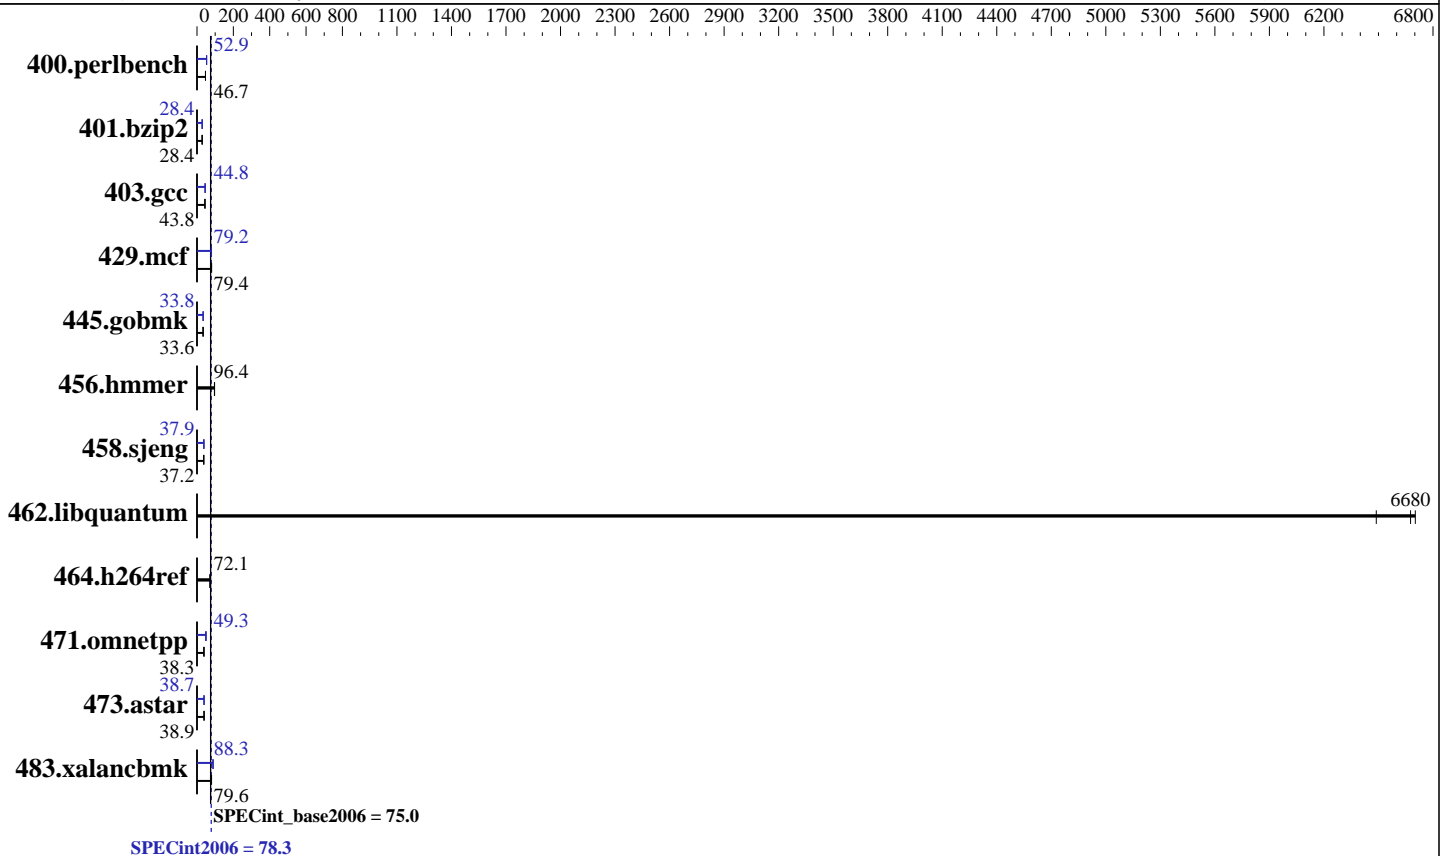

Hardware

CPU Name: Intel Xeon Gold 6134
CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz
CPU MHz: 3200
FPU: Integrated
CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 1 MB I+D on chip per core
L3 Cache: 24.75 MB I+D on chip per chip
Other Cache: None
Memory: 384 GB (24 x 16 GB 2Rx4 PC4-2666V-R)
Disk Subsystem: 1 x 600 GB SAS HDD, 10K RPM
Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 7.3 (Maipo)
 3.10.0-514.el7.x86_64
Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux
Auto Parallel: Yes
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Gold 6134, 3.20 GHz)

SPECint2006 = **78.3**

SPECint_base2006 = **75.0**

CPU2006 license: 9019
Test sponsor: Cisco Systems
Tested by: Cisco Systems

Test date: Dec-2017
Hardware Availability: Aug-2017
Software Availability: Jun-2017

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	209	46.8	<u>209</u>	<u>46.7</u>	210	46.6	185	52.8	<u>185</u>	<u>52.9</u>	184	53.0
401.bzip2	340	28.4	<u>340</u>	<u>28.4</u>	339	28.5	339	28.5	<u>339</u>	<u>28.4</u>	339	28.4
403.gcc	184	43.8	<u>184</u>	<u>43.8</u>	184	43.7	180	44.8	180	44.8	<u>180</u>	<u>44.8</u>
429.mcf	<u>115</u>	<u>79.4</u>	117	78.2	113	80.6	114	80.0	117	77.7	<u>115</u>	<u>79.2</u>
445.gobmk	311	33.7	<u>312</u>	<u>33.6</u>	313	33.6	311	33.8	<u>310</u>	<u>33.8</u>	310	33.8
456.hammer	<u>96.8</u>	<u>96.4</u>	97.4	95.8	96.5	96.7	<u>96.8</u>	<u>96.4</u>	97.4	95.8	96.5	96.7
458.sjeng	326	37.1	<u>326</u>	<u>37.2</u>	325	37.2	319	37.9	<u>320</u>	<u>37.9</u>	320	37.8
462.libquantum	3.19	6490	<u>3.10</u>	<u>6680</u>	3.09	6700	3.19	6490	<u>3.10</u>	<u>6680</u>	3.09	6700
464.h264ref	307	72.2	<u>307</u>	<u>72.1</u>	309	71.7	307	72.2	<u>307</u>	<u>72.1</u>	309	71.7
471.omnetpp	166	37.6	161	38.7	<u>163</u>	<u>38.3</u>	132	47.5	124	50.3	<u>127</u>	<u>49.3</u>
473.astar	181	38.9	180	39.0	<u>180</u>	<u>38.9</u>	<u>181</u>	<u>38.7</u>	181	38.7	182	38.7
483.xalancbmk	<u>86.7</u>	<u>79.6</u>	86.0	80.2	86.8	79.5	78.0	88.4	78.3	88.2	<u>78.1</u>	<u>88.3</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:

```

Intel HyperThreading Technology set to Disabled
CPU performance set to Enterprise
Power Performance Tuning set to OS Controls
SNC set to Disabled
Patrol Scrub set to Disabled
Sysinfo program /home/cpu2006-1.2/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on localhost.localdomain Fri Dec 22 15:23:25 2017

```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```

model name : Intel(R) Xeon(R) Gold 6134 CPU @ 3.20GHz
2 "physical id"s (chips)
16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Gold 6134, 3.20 GHz)

SPECint2006 = 78.3

SPECint_base2006 = 75.0

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Dec-2017

Hardware Availability: Aug-2017

Software Availability: Jun-2017

Platform Notes (Continued)

following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 8
siblings  : 8
physical 0: cores 0 1 2 3 4 10 19 24
physical 1: cores 0 2 3 4 16 19 25 26
cache size : 25344 KB
```

From /proc/meminfo

```
MemTotal:      394867472 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

From /etc/*release* /etc/*version*

```
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.3 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.3"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server
```

uname -a:

```
Linux localhost.localdomain 3.10.0-514.el7.x86_64 #1 SMP Wed Oct 19 11:24:13 EDT 2016 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Dec 22 15:18

SPEC is set to: /home/cpu2006-1.2

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdb1       xfs   508G  24G  485G   5% /
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Cisco Systems, Inc. C220M5.3.1.1d.0.0615170645 06/15/2017 Cisco Systems, Inc. C220M5.3.1.1d.0.0615170645 06/15/2017

Memory:

48x 0xCE00 M393A2G40EB2-CTD 16 GB 2 rank 2666 MHz

(End of data from sysinfo program)

The correct amount of Memory installed is 384 GB (24 x 16 GB) and the dmidecode is reporting invalid number of DIMMs installed
Installed Memory:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Gold 6134, 3.20 GHz)

SPECint2006 = 78.3

SPECint_base2006 = 75.0

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Dec-2017

Hardware Availability: Aug-2017

Software Availability: Jun-2017

Platform Notes (Continued)

24x 0xCE00 M393A2G40EB2-CTD 16 GB 2 rank 2666 MHz

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/home/cpu2006-1.2/lib/ia32:/home/cpu2006-1.2/lib/intel64:/home/cpu2006-1.2/sh10.2"

OMP_NUM_THREADS = "16"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

No: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

This benchmark result is intended to provide perspective on past performance using the historical hardware and/or software described on this result page.

The system as described on this result page was formerly generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC OSG Policy document, <http://www.spec.org/osg/policy.html>

This measured result may not be representative of the result that would be measured were this benchmark run with hardware and software available as of the publication date.

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

401.bzip2: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Cisco Systems

SPECint2006 = 78.3

Cisco UCS C220 M5 (Intel Xeon Gold 6134, 3.20 GHz)

SPECint_base2006 = 75.0

CPU2006 license: 9019

Test date: Dec-2017

Test sponsor: Cisco Systems

Hardware Availability: Aug-2017

Tested by: Cisco Systems

Software Availability: Jun-2017

Base Portability Flags (Continued)

```

403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

```

Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch
-auto-p32

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh10.2 -lsmartheap64

```

Base Other Flags

C benchmarks:

```

403.gcc: -Dalloca=_alloca

```

Peak Compiler Invocation

C benchmarks (except as noted below):

```

icc -m64

```

```

400.perlbench: icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

```

```

445.gobmk: icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

```

C++ benchmarks (except as noted below):

```

icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

```

```

473.astar: icpc -m64

```



SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Gold 6134, 3.20 GHz)

SPECint2006 = 78.3

SPECint_base2006 = 75.0

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Dec-2017

Hardware Availability: Aug-2017

Software Availability: Jun-2017

Peak Portability Flags

```

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
               -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
               -no-prec-div(pass 2) -qopt-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
            -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div -auto-ilp32 -qopt-prefetch

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc
          -qopt-malloc-options=3 -auto-ilp32

429.mcf: -xCORE-AVX2 -ipo -O3 -no-prec-div -parallel
          -qopt-prefetch -auto-p32

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
            -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2)

456.hmmer: basepeak = yes

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
            -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

```

C++ benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Gold 6134, 3.20 GHz)

SPECint2006 = 78.3

SPECint_base2006 = 75.0

CPU2006 license: 9019

Test sponsor: Cisco Systems

Tested by: Cisco Systems

Test date: Dec-2017

Hardware Availability: Aug-2017

Software Availability: Jun-2017

Peak Optimization Flags (Continued)

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -qopt-ra-region-strategy=block
-Wl,-z,muldefs -L/sh10.2 -lsmartheap

473.astar: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-auto-p32 -Wl,-z,muldefs -L/sh10.2 -lsmartheap64

483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-Wl,-z,muldefs -L/sh10.2 -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revH.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Mon Feb 26 10:21:27 2018 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 23 February 2018.