



# SPEC® CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650  
(2.10 GHz, Intel Xeon Gold 6152)

SPECspeed2017\_fp\_base = 113

SPECspeed2017\_fp\_peak = 114

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Oct-2017

Hardware Availability: Aug-2017

Software Availability: Sep-2017

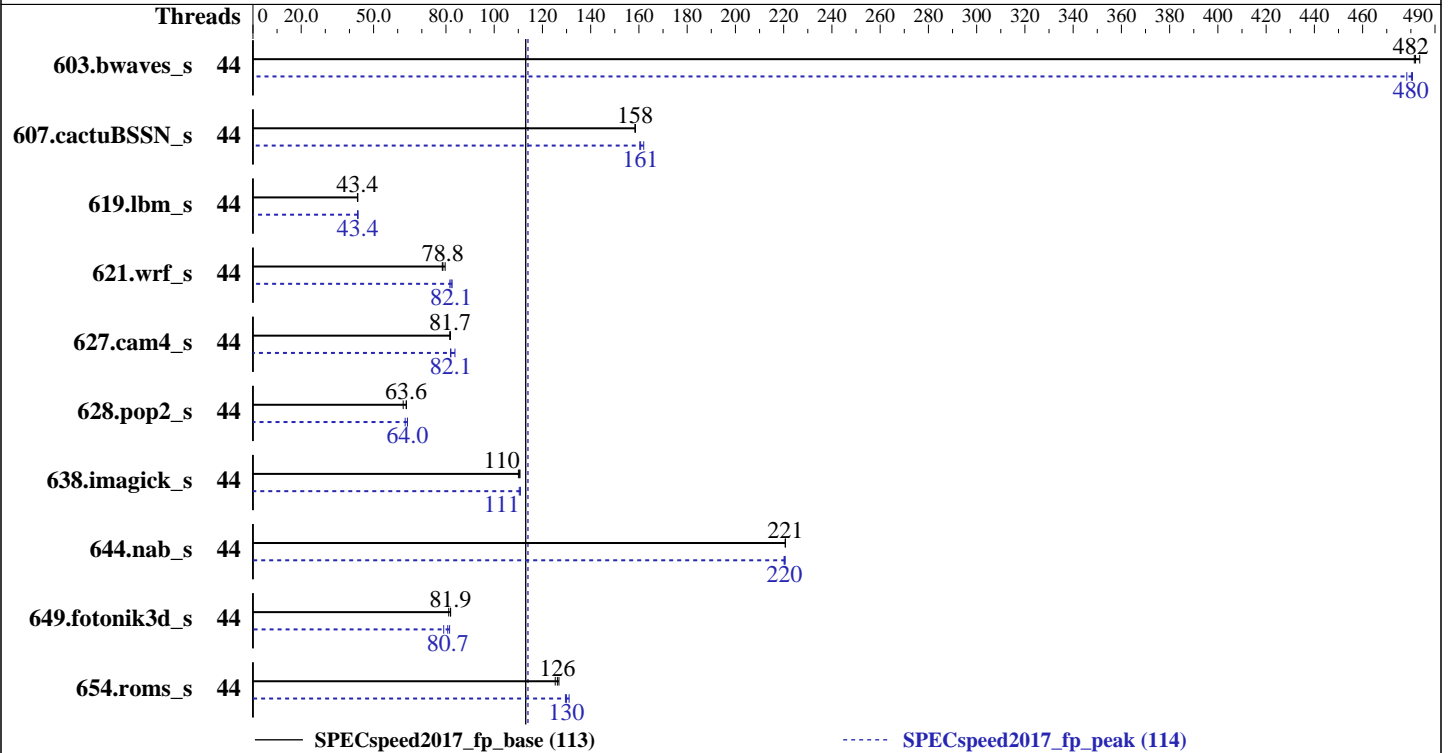

### Hardware

CPU Name: Intel Xeon Gold 6152  
 Max MHz.: 3700  
 Nominal: 2100  
 Enabled: 44 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 30.25 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2666V-R)  
 Storage: 1 x 800 GB SAS SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP2 (x86\_64)  
 Kernel 4.4.21-69-default  
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++  
 Compiler for Linux;  
 Fortran: Version 18.0.0.128 of Intel Fortran  
 Compiler for Linux  
 Parallel: Yes  
 Firmware: Lenovo BIOS Version IVE109Q 1.00 released Jun-2017  
 File System: btrfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650  
(2.10 GHz, Intel Xeon Gold 6152)

SPECspeed2017\_fp\_base = 113

SPECspeed2017\_fp\_peak = 114

CPU2017 License: 9017  
Test Sponsor: Lenovo Global Technology  
Tested by: Lenovo Global Technology

Test Date: Oct-2017  
Hardware Availability: Aug-2017  
Software Availability: Sep-2017

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	44	123	481	122	484	<u>122</u>	<u>482</u>	44	<u>123</u>	<u>480</u>	123	481	123	478
607.cactuBSSN_s	44	<u>105</u>	<u>158</u>	105	158	105	159	44	104	160	<u>104</u>	<u>161</u>	103	162
619.lbm_s	44	<u>121</u>	<u>43.4</u>	121	43.5	121	43.3	44	121	43.3	120	43.6	<u>121</u>	<u>43.4</u>
621.wrf_s	44	<u>168</u>	<u>78.8</u>	169	78.5	166	79.7	44	160	82.6	<u>161</u>	<u>82.1</u>	162	81.6
627.cam4_s	44	109	81.7	108	81.9	<u>109</u>	<u>81.7</u>	44	<u>108</u>	<u>82.1</u>	106	83.7	108	81.9
628.pop2_s	44	191	62.3	<u>187</u>	<u>63.6</u>	187	63.6	44	<u>185</u>	<u>64.0</u>	185	64.1	188	63.1
638.imagick_s	44	<u>131</u>	<u>110</u>	131	110	130	111	44	<u>130</u>	<u>111</u>	131	110	130	111
644.nab_s	44	<u>79.2</u>	<u>221</u>	79.2	221	79.2	221	44	79.2	221	<u>79.3</u>	<u>220</u>	79.4	220
649.fotonik3d_s	44	111	81.9	112	81.2	<u>111</u>	<u>81.9</u>	44	<u>113</u>	<u>80.7</u>	115	79.1	112	81.5
654.roms_s	44	126	125	<u>125</u>	<u>126</u>	124	127	44	122	130	<u>121</u>	<u>130</u>	120	131

SPECspeed2017\_fp\_base = 113

SPECspeed2017\_fp\_peak = 114

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,compact"  
LD\_LIBRARY\_PATH = "/home/cpu2017.1.0.2.ic18.0/lib/ia32:/home/cpu2017.1.0.2.ic18.0/lib/intel64"  
LD\_LIBRARY\_PATH = "\$LD\_LIBRARY\_PATH:/home/cpu2017.1.0.2.ic18.0/je5.0.1-32:/home/cpu2017.1.0.2.ic18.0/je5.0.1-64"  
OMP\_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches

## Platform Notes

BIOS configuration:  
Choose Operating Mode set to Maximum Performance  
Hyper-Threading set to Disable  
MONITORMWAIT set to Enable  
Adjacent Cache Prefetch set to Disable  
XPT Prefetcher set to Enable  
Stale AtoS set to Enable  
DCA set to Enable

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650  
(2.10 GHz, Intel Xeon Gold 6152)

SPECspeed2017\_fp\_base = 113

SPECspeed2017\_fp\_peak = 114

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Oct-2017  
**Hardware Availability:** Aug-2017  
**Software Availability:** Sep-2017

### Platform Notes (Continued)

sysinfo program /home/cpu2017.1.0.2.ic18.0/bin/sysinfo  
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on Cyborg-SPECcpu2006-SUSE12SP2 Sun Oct 22 16:47:15 2017

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Gold 6152 CPU @ 2.10GHz  
2 "physical id"s (chips)  
44 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 22  
siblings : 22  
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27 28  
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27 28

From lscpu:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 44  
On-line CPU(s) list: 0-43  
Thread(s) per core: 1  
Core(s) per socket: 22  
Socket(s): 2  
NUMA node(s): 2  
Vendor ID: GenuineIntel  
CPU family: 6  
Model: 85  
Model name: Intel(R) Xeon(R) Gold 6152 CPU @ 2.10GHz  
Stepping: 4  
CPU MHz: 2095.088  
BogoMIPS: 4190.17  
Virtualization: VT-x  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 1024K  
L3 cache: 30976K  
NUMA node0 CPU(s): 0-21  
NUMA node1 CPU(s): 22-43  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds\_cpl vmx smx est tm2 ssse3 sdbg

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650  
(2.10 GHz, Intel Xeon Gold 6152)

SPECspeed2017\_fp\_base = 113

SPECspeed2017\_fp\_peak = 114

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Oct-2017  
**Hardware Availability:** Aug-2017  
**Software Availability:** Sep-2017

### Platform Notes (Continued)

```
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb pln pts dtherm intel_pt
tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2
erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc
```

```
/proc/cpuinfo cache data
cache size : 30976 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21
node 0 size: 193109 MB
node 0 free: 191813 MB
node 1 cpus: 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43
node 1 size: 193504 MB
node 1 free: 192280 MB
node distances:
node 0 1
0: 10 21
1: 21 10
```

```
From /proc/meminfo
MemTotal: 395892616 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

```
uname -a:
Linux Cyborg-SPECcpu2006-SUSE12SP2 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC
2016 (9464f67) x86_64 x86_64 x86_64 GNU/Linux
```

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650  
(2.10 GHz, Intel Xeon Gold 6152)

SPECspeed2017\_fp\_base = 113

SPECspeed2017\_fp\_peak = 114

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Oct-2017  
**Hardware Availability:** Aug-2017  
**Software Availability:** Sep-2017

### Platform Notes (Continued)

run-level 3 Oct 22 11:46

SPEC is set to: /home/cpu2017.1.0.2.ic18.0  
Filesystem      Type      Size   Used Avail Use% Mounted on  
/dev/sdb2       btrfs    744G   173G  570G  24% /home

Additional information from dmidecode follows.   WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Lenovo -[IVE109Q-1.00]- 06/28/2017  
Memory:  
24x Samsung M393A2K43BB1-CTD 16 GB 2 rank 2666

(End of data from sysinfo program)

### Compiler Version Notes

=====  
CC 619.lbm\_s(base) 638.imagick\_s(base, peak) 644.nab\_s(base, peak)  
-----

icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
CC 619.lbm\_s(peak)  
-----

icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
FC 607.cactuBSSN\_s(base)  
-----

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
FC 607.cactuBSSN\_s(peak)  
-----

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR650  
(2.10 GHz, Intel Xeon Gold 6152)

SPECspeed2017\_fp\_base = 113

SPECspeed2017\_fp\_peak = 114

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Oct-2017  
**Hardware Availability:** Aug-2017  
**Software Availability:** Sep-2017

## Compiler Version Notes (Continued)

```
-----
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
FC 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)
-----
```

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
FC 603.bwaves_s(peak) 649.fotonik3d_s(peak) 654.roms_s(peak)
-----
```

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
CC 621.wrf_s(base) 627.cam4_s(base, peak) 628.pop2_s(base)
-----
```

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
CC 621.wrf_s(peak) 628.pop2_s(peak)
-----
```

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

## Base Compiler Invocation

C benchmarks:  
icc

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed2017\_fp\_base = 113

ThinkSystem SR650  
(2.10 GHz, Intel Xeon Gold 6152)

SPECspeed2017\_fp\_peak = 114

CPU2017 License: 9017

Test Date: Oct-2017

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

## Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

## Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:

```
-DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
```

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650  
(2.10 GHz, Intel Xeon Gold 6152)

SPECspeed2017\_fp\_base = 113

SPECspeed2017\_fp\_peak = 114

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Oct-2017

Hardware Availability: Aug-2017

Software Availability: Sep-2017

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

`-nostandard-realloc-lhs -align array32byte`

## Base Other Flags

C benchmarks:

`-m64 -std=c11`

Fortran benchmarks:

`-m64`

Benchmarks using both Fortran and C:

`-m64 -std=c11`

Benchmarks using Fortran, C, and C++:

`-m64 -std=c11`

## Peak Compiler Invocation

C benchmarks:

`icc`

Fortran benchmarks:

`ifort`

Benchmarks using both Fortran and C:

`ifort icc`

Benchmarks using Fortran, C, and C++:

`icpc icc ifort`

## Peak Portability Flags

Same as Base Portability Flags





# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed2017\_fp\_base = 113

ThinkSystem SR650  
(2.10 GHz, Intel Xeon Gold 6152)

SPECspeed2017\_fp\_peak = 114

CPU2017 License: 9017

Test Date: Oct-2017

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

## Peak Optimization Flags

C benchmarks:

```
619.lbm_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX512
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div
-qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP
```

```
638.imagick_s: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp
-DSPEC_OPENMP
```

644.nab\_s: Same as 638.imagick\_s

Fortran benchmarks:

```
-prof-gen(pass 1) -prof-use(pass 2) -DSPEC_SUPPRESS_OPENMP
-DSPEC_OPENMP -O2 -xCORE-AVX512 -qopt-prefetch -ipo -O3
-ffinite-math-only -no-prec-div -qopt-mem-layout-trans=3 -qopenmp
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
621.wrf_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX512
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div
-qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte
```

```
627.cam4_s: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte
```

628.pop2\_s: Same as 621.wrf\_s

Benchmarks using Fortran, C, and C++:

```
-prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX512 -qopt-prefetch
-ipo -O3 -ffinite-math-only -no-prec-div -qopt-mem-layout-trans=3
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP -nostandard-realloc-lhs
-align array32byte
```

## Peak Other Flags

C benchmarks:

```
-m64 -std=c11
```

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR650  
(2.10 GHz, Intel Xeon Gold 6152)

SPECspeed2017\_fp\_base = 113

SPECspeed2017\_fp\_peak = 114

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Oct-2017

**Hardware Availability:** Aug-2017

**Software Availability:** Sep-2017

## Peak Other Flags (Continued)

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-Flags-V1.2-SKL-E.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-Flags-V1.2-SKL-E.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2017-10-22 04:47:15-0400.

Report generated on 2018-10-31 14:51:15 by CPU2017 PDF formatter v6067.

Originally published on 2017-11-22.