



SPEC® CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940
(Intel Xeon Gold 6142, 2.60 GHz)

SPECspeed2017_int_base = 8.83

SPECspeed2017_int_peak = 9.07

CPU2017 License: 55


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

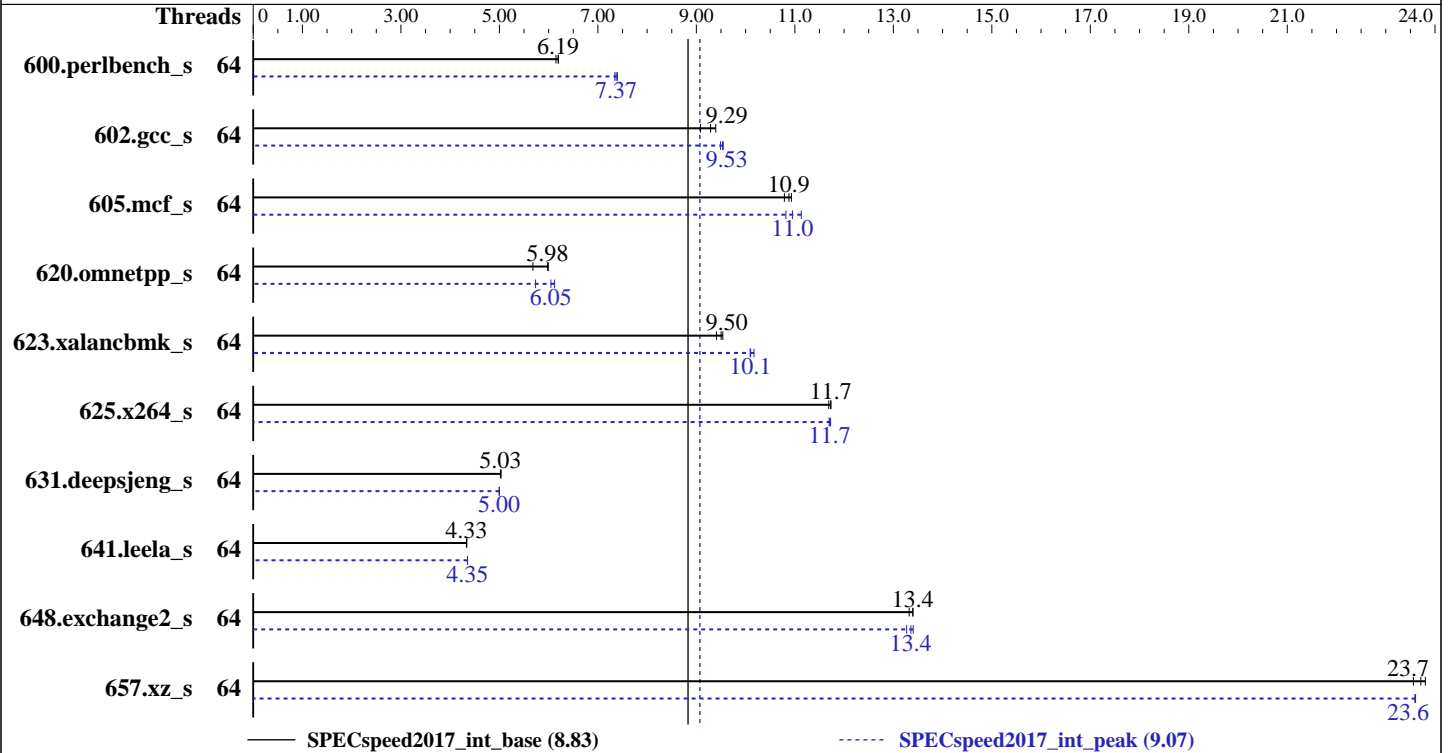

Hardware

CPU Name: Intel Xeon Gold 6142
 Max MHz.: 3700
 Nominal: 2600
 Enabled: 64 cores, 4 chips
 Orderable: 2,4 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 22 MB I+D on chip per chip
 Other: None
 Memory: 768 GB (48 x 16 GB 2Rx8 PC4-2666V-R)
 Storage: 1 x 900 GB 15K RPM SAS12
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP2
 4.4.21-69-default
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++
 Compiler for Linux;
 Fortran: Version 18.0.0.128 of Intel Fortran
 Compiler for Linux
 Parallel: Yes
 Firmware: Version 1.1.7 released Sep-2017
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc: jemalloc memory allocator library
 V5.0.1;
 jemalloc: configured and built at default for
 32bit (i686) and 64bit (x86_64) targets;
 jemalloc: built with the RedHat Enterprise 7.4,
 and the system compiler gcc 4.8.5;
 jemalloc: sources available from jemalloc.net or
 releases



SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940
(Intel Xeon Gold 6142, 2.60 GHz)

SPECspeed2017_int_base = 8.83

SPECspeed2017_int_peak = 9.07

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Oct-2017
Hardware Availability: Sep-2017
Software Availability: Sep-2017

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	64	286	6.20	<u>287</u>	<u>6.19</u>	289	6.15	64	<u>241</u>	<u>7.37</u>	242	7.34	240	7.40
602.gcc_s	64	<u>429</u>	<u>9.29</u>	424	9.39	438	9.09	64	<u>418</u>	<u>9.53</u>	417	9.55	420	9.49
605.mcf_s	64	438	10.8	432	10.9	<u>434</u>	<u>10.9</u>	64	436	10.8	424	11.1	<u>431</u>	<u>11.0</u>
620.omnetpp_s	64	287	5.68	272	5.99	<u>273</u>	<u>5.98</u>	64	284	5.73	266	6.12	<u>270</u>	<u>6.05</u>
623.xalancbmk_s	64	149	9.54	151	9.41	<u>149</u>	<u>9.50</u>	64	<u>140</u>	<u>10.1</u>	140	10.1	139	10.2
625.x264_s	64	151	11.7	150	11.7	<u>150</u>	<u>11.7</u>	64	<u>151</u>	<u>11.7</u>	150	11.7	151	11.7
631.deepsjeng_s	64	285	5.02	285	5.03	<u>285</u>	<u>5.03</u>	64	<u>287</u>	<u>5.00</u>	287	5.00	287	5.00
641.leela_s	64	394	4.33	<u>394</u>	<u>4.33</u>	393	4.34	64	392	4.35	392	4.35	<u>392</u>	<u>4.35</u>
648.exchange2_s	64	<u>219</u>	<u>13.4</u>	221	13.3	219	13.4	64	<u>220</u>	<u>13.4</u>	222	13.3	219	13.4
657.xz_s	64	260	23.8	262	23.6	<u>261</u>	<u>23.7</u>	64	262	23.6	262	23.6	<u>262</u>	<u>23.6</u>

SPECspeed2017_int_base = 8.83

SPECspeed2017_int_peak = 9.07

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

OMP_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

Platform Notes

BIOS settings:

Logical Processor Disabled

Virtualization Technology Disabled

Sub NUMA Cluster Disabled

System Profile set to Custom

CPU Performance set to Maximum Performance

C1E Disabled

C States set to Autonomous

Uncore Frequency set to Dynamic

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940
(Intel Xeon Gold 6142, 2.60 GHz)

SPECspeed2017_int_base = 8.83

SPECspeed2017_int_peak = 9.07

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Platform Notes (Continued)

Memory Patrol Scrub Disabled
Energy Efficiency Policy set to Performance
CPU Interconnect Bus Link Power Management Disabled
PCI ASPM L1 Link Power Management Disabled
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on linux-2h8y Sat Oct 7 20:01:00 2017

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 6142 CPU @ 2.60GHz
4 "physical id"s (chips)
64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 16
siblings : 16
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 2: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 3: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

From lscpu:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 64
On-line CPU(s) list: 0-63
Thread(s) per core: 1
Core(s) per socket: 16
Socket(s): 4
NUMA node(s): 4
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 6142 CPU @ 2.60GHz
Stepping: 4
CPU MHz: 2593.934
BogoMIPS: 5187.86
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 22528K

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940
(Intel Xeon Gold 6142, 2.60 GHz)

SPECspeed2017_int_base = 8.83

SPECspeed2017_int_peak = 9.07

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Platform Notes (Continued)

NUMA node0 CPU(s): 0,4,8,12,16,20,24,28,32,36,40,44,48,52,56,60

NUMA node1 CPU(s): 1,5,9,13,17,21,25,29,33,37,41,45,49,53,57,61

NUMA node2 CPU(s): 2,6,10,14,18,22,26,30,34,38,42,46,50,54,58,62

NUMA node3 CPU(s): 3,7,11,15,19,23,27,31,35,39,43,47,51,55,59,63

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb pln pts dtherm intel_pt tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc

```
/proc/cpuinfo cache data
cache size : 22528 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)

node 0 cpus: 0 4 8 12 16 20 24 28 32 36 40 44 48 52 56 60

node 0 size: 192119 MB

node 0 free: 191492 MB

node 1 cpus: 1 5 9 13 17 21 25 29 33 37 41 45 49 53 57 61

node 1 size: 193521 MB

node 1 free: 192991 MB

node 2 cpus: 2 6 10 14 18 22 26 30 34 38 42 46 50 54 58 62

node 2 size: 193521 MB

node 2 free: 192904 MB

node 3 cpus: 3 7 11 15 19 23 27 31 35 39 43 47 51 55 59 63

node 3 size: 193518 MB

node 3 free: 192980 MB

node distances:

node 0 1 2 3

0: 10 21 21 21

1: 21 10 21 21

2: 21 21 10 21

3: 21 21 21 10

From /proc/meminfo

MemTotal: 791225344 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

/usr/bin/lsb_release -d

SUSE Linux Enterprise Server 12 SP2

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940
(Intel Xeon Gold 6142, 2.60 GHz)

SPECspeed2017_int_base = 8.83

SPECspeed2017_int_peak = 9.07

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Platform Notes (Continued)

From /etc/*release* /etc/*version*

SuSE-release:

SUSE Linux Enterprise Server 12 (x86_64)

VERSION = 12

PATCHLEVEL = 2

This file is deprecated and will be removed in a future service pack or release.

Please check /etc/os-release for details about this release.

os-release:

NAME="SLES"

VERSION="12-SP2"

VERSION_ID="12.2"

PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"

ID="sles"

ANSI_COLOR="0;32"

CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:

Linux linux-2h8y 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016 (9464f67)

x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Oct 7 20:00

SPEC is set to: /home/cpu2017

Filesystem Type Size Used Avail Use% Mounted on

/dev/sda4 xfs 796G 17G 780G 3% /home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 1.1.7 08/10/2017

Memory:

48x 00CE063200CE M393A2K43BB1-CTD 16 GB 2 rank 2666

(End of data from sysinfo program)

Compiler Version Notes

=====
CC 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base) 625.x264_s(base,
peak) 657.xz_s(base)

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940
(Intel Xeon Gold 6142, 2.60 GHz)

SPECspeed2017_int_base = 8.83

SPECspeed2017_int_peak = 9.07

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Compiler Version Notes (Continued)

=====
CC 600.perlbench_s(peak) 602.gcc_s(peak) 605.mcf_s(peak) 657.xz_s(peak)

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CXXC 620.omnetpp_s(base) 623.xalanbmk_s(base) 631.deepsjeng_s(base)
641.leela_s(base)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CXXC 620.omnetpp_s(peak) 623.xalanbmk_s(peak) 631.deepsjeng_s(peak)
641.leela_s(peak)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 648.exchange2_s(base, peak)

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort



SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940
(Intel Xeon Gold 6142, 2.60 GHz)

SPECspeed2017_int_base = 8.83

SPECspeed2017_int_peak = 9.07

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Base Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

Fortran benchmarks:

```
-m64
```



SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940
(Intel Xeon Gold 6142, 2.60 GHz)

SPECspeed2017_int_base = 8.83

SPECspeed2017_int_peak = 9.07

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Peak Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xCORE-AVX512 -qopt-mem-layout-trans=3 -ipo -O3
-no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -fno-strict-overflow
-L/usr/local/je5.0.1-64/lib -ljemalloc

602.gcc_s: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xCORE-AVX512 -qopt-mem-layout-trans=3 -ipo -O3
-no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -L/usr/local/je5.0.1-64/lib -ljemalloc

605.mcf_s: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940
(Intel Xeon Gold 6142, 2.60 GHz)

SPECspeed2017_int_base = 8.83

SPECspeed2017_int_peak = 9.07

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Peak Optimization Flags (Continued)

625.x264_s: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc

657.xz_s: Same as 602.gcc_s

C++ benchmarks:

620.omnetpp_s: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc

623.xalancbmk_s: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-32/lib -ljemalloc

631.deepsjeng_s: Same as 620.omnetpp_s

641.leela_s: Same as 620.omnetpp_s

Fortran benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc

Peak Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks (except as noted below):

-m64

623.xalancbmk_s: -m32

Fortran benchmarks:

-m64



SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940
(Intel Xeon Gold 6142, 2.60 GHz)

SPECspeed2017_int_base = 8.83

SPECspeed2017_int_peak = 9.07

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revC.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2017-10-07 23:01:00-0400.

Report generated on 2018-10-31 15:50:03 by CPU2017 PDF formatter v6067.

Originally published on 2017-12-21.