



SPEC® CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology


ThinkSystem SR650
(3.00 GHz, Intel Xeon Gold 6136)

SPECspeed2017_fp_base = 102

SPECspeed2017_fp_peak = 103

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Oct-2017
Hardware Availability: Aug-2017
Software Availability: Sep-2017

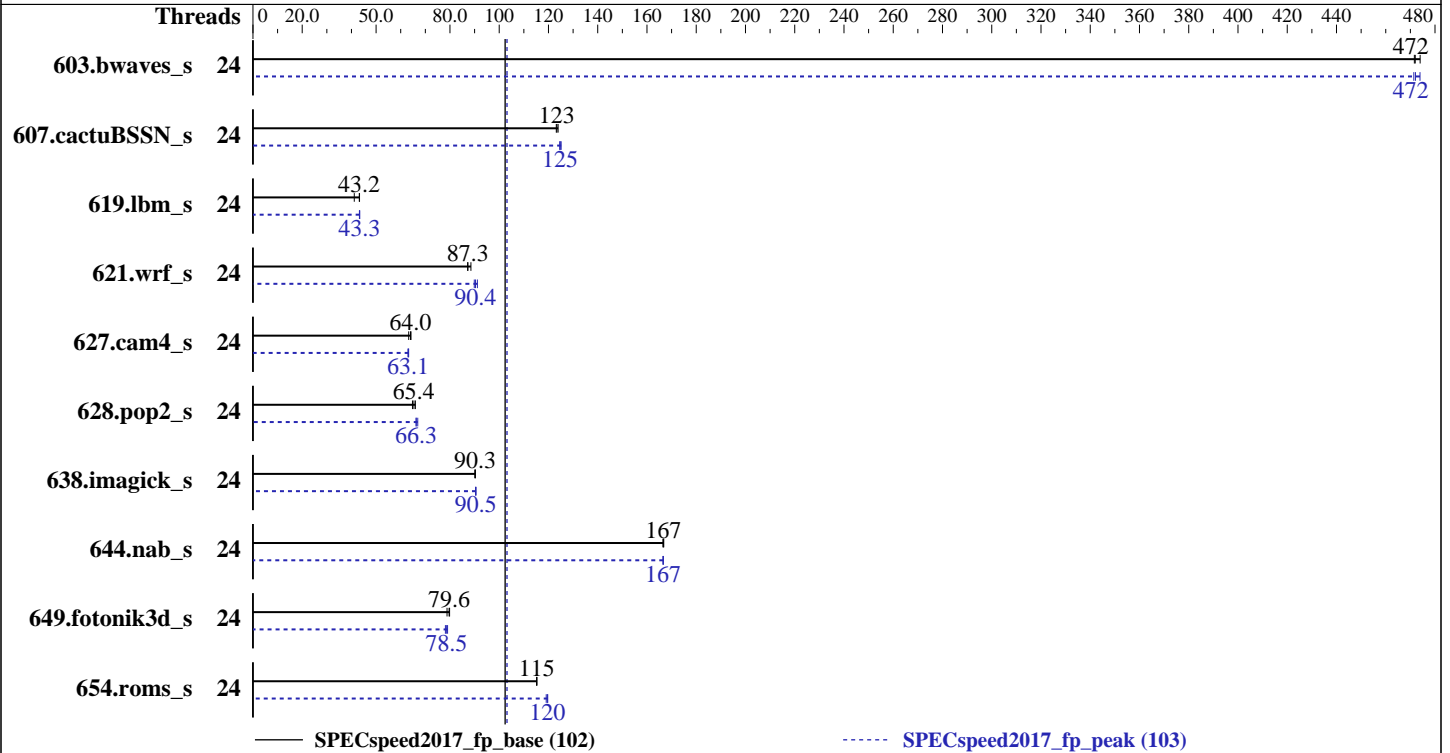

Hardware

CPU Name: Intel Xeon Gold 6136
Max MHz.: 3700
Nominal: 3000
Enabled: 24 cores, 2 chips
Orderable: 1,2 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 24.75 MB I+D on chip per chip
Other: None
Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2666V-R)
Storage: 1 x 800 GB SAS SSD
Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP2 (x86_64)
Kernel 4.4.21-69-default
Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;
Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
Parallel: Yes
Firmware: Lenovo BIOS Version IVE109Q 1.00 released Jun-2017
File System: btrfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: None



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650
(3.00 GHz, Intel Xeon Gold 6136)

SPECSpeed2017_fp_base = 102

SPECSpeed2017_fp_peak = 103

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Oct-2017
Hardware Availability: Aug-2017
Software Availability: Sep-2017

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	24	125	472	124	474	<u>125</u>	<u>472</u>	24	125	471	<u>125</u>	<u>472</u>	124	474
607.cactuBSSN_s	24	<u>135</u>	<u>123</u>	135	124	135	123	24	133	125	134	125	<u>134</u>	<u>125</u>
619.lbm_s	24	121	43.3	127	41.1	<u>121</u>	<u>43.2</u>	24	121	43.3	121	43.2	<u>121</u>	<u>43.3</u>
621.wrf_s	24	152	87.2	<u>152</u>	<u>87.3</u>	149	88.5	24	147	89.9	<u>146</u>	<u>90.4</u>	145	91.1
627.cam4_s	24	140	63.2	138	64.2	<u>139</u>	<u>64.0</u>	24	141	63.0	140	63.2	<u>140</u>	<u>63.1</u>
628.pop2_s	24	183	64.8	180	66.0	<u>182</u>	<u>65.4</u>	24	<u>179</u>	<u>66.3</u>	179	66.3	177	66.9
638.imagick_s	24	160	90.3	160	90.1	<u>160</u>	<u>90.3</u>	24	160	90.4	159	90.6	<u>159</u>	<u>90.5</u>
644.nab_s	24	<u>105</u>	<u>167</u>	105	167	105	166	24	105	167	<u>105</u>	<u>167</u>	105	167
649.fotonik3d_s	24	114	79.8	<u>114</u>	<u>79.6</u>	116	78.8	24	<u>116</u>	<u>78.5</u>	117	78.1	115	79.0
654.roms_s	24	<u>137</u>	<u>115</u>	137	115	137	115	24	<u>132</u>	<u>120</u>	132	119	132	120

SPECSpeed2017_fp_base = **102**

SPECSpeed2017_fp_peak = **103**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017.1.0.2.ic18.0/lib/ia32:/home/cpu2017.1.0.2.ic18.0/lib/intel64"
LD_LIBRARY_PATH = "\$LD_LIBRARY_PATH:/home/cpu2017.1.0.2.ic18.0/je5.0.1-32:/home/cpu2017.1.0.2.ic18.0/je5.0.1-64"
OMP_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation

Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches

No: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
No: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
No: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

This benchmark result is intended to provide perspective on past performance using the historical hardware and/or software described on this result page.

The system as described on this result page was formerly

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed2017_fp_base = 102

ThinkSystem SR650
(3.00 GHz, Intel Xeon Gold 6136)

SPECspeed2017_fp_peak = 103

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Oct-2017
Hardware Availability: Aug-2017
Software Availability: Sep-2017

General Notes (Continued)

generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC OSG Policy document, <http://www.spec.org/osg/policy.html>

This measured result may not be representative of the result that would be measured were this benchmark run with hardware and software available as of the publication date.

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance

Hyper-Threading set to Disable

MONITORMWAIT set to Enable

Adjacent Cache Prefetch set to Disable

XPT Prefetcher set to Enable

Stale AtoS set to Enable

DCA set to Enable

 Sysinfo program /home/cpu2017.1.0.2.ic18.0/bin/sysinfo

 Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

 running on Cyborg-SPECcpu2006-SUSE12SP2 Mon Oct 23 18:11:52 2017

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

 model name : Intel(R) Xeon(R) Gold 6136 CPU @ 3.00GHz

 2 "physical id"s (chips)

 24 "processors"

 cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

 cpu cores : 12

 siblings : 12

 physical 0: cores 0 1 2 3 4 9 10 16 18 19 25 26

 physical 1: cores 0 1 2 3 4 9 10 16 18 19 25 26

From lscpu:

 Architecture: x86_64

 CPU op-mode(s): 32-bit, 64-bit

 Byte Order: Little Endian

 CPU(s): 24

 On-line CPU(s) list: 0-23

 Thread(s) per core: 1

 Core(s) per socket: 12

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650
(3.00 GHz, Intel Xeon Gold 6136)

SPECspeed2017_fp_base = 102

SPECspeed2017_fp_peak = 103

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Oct-2017
Hardware Availability: Aug-2017
Software Availability: Sep-2017

Platform Notes (Continued)

```

Socket(s):                2
NUMA node(s):            2
Vendor ID:               GenuineIntel
CPU family:              6
Model:                   85
Model name:              Intel(R) Xeon(R) Gold 6136 CPU @ 3.00GHz
Stepping:                4
CPU MHz:                 2992.971
BogoMIPS:                5985.94
Virtualization:         VT-x
L1d cache:               32K
L1i cache:               32K
L2 cache:                1024K
L3 cache:                25344K
NUMA node0 CPU(s):      0-11
NUMA node1 CPU(s):      12-23

```

```

Flags:                    fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb pln pts dtherm intel_pt
tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2
erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc

```

```

/proc/cpuinfo cache data
cache size : 25344 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11
node 0 size: 193109 MB
node 0 free: 192311 MB
node 1 cpus: 12 13 14 15 16 17 18 19 20 21 22 23
node 1 size: 193504 MB
node 1 free: 192823 MB
node distances:
node  0  1
 0:  10  21
 1:  21  10

```

```

From /proc/meminfo
MemTotal:      395892616 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650
(3.00 GHz, Intel Xeon Gold 6136)

SPECspeed2017_fp_base = 102

SPECspeed2017_fp_peak = 103

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Oct-2017
Hardware Availability: Aug-2017
Software Availability: Sep-2017

Platform Notes (Continued)

```

From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 2
  # This file is deprecated and will be removed in a future service pack or release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP2"
  VERSION_ID="12.2"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:
Linux Cyborg-SPECcpu2006-SUSE12SP2 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC
2016 (9464f67) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Oct 23 18:10

SPEC is set to: /home/cpu2017.1.0.2.ic18.0
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdb2       btrfs 744G  173G  570G  24% /home

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
BIOS Lenovo -[IVE109Q-1.00]- 06/28/2017
Memory:
  24x Samsung M393A2K43BB1-CTD 16 GB 2 rank 2666

(End of data from sysinfo program)

```

Compiler Version Notes

```

=====
CC 619.lbm_s(base) 638.imagick_s(base, peak) 644.nab_s(base, peak)
-----
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----

```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650
(3.00 GHz, Intel Xeon Gold 6136)

SPECspeed2017_fp_base = 102

SPECspeed2017_fp_peak = 103

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Oct-2017
Hardware Availability: Aug-2017
Software Availability: Sep-2017

Compiler Version Notes (Continued)

=====
CC 619.lbm_s(peak)

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 607.cactuBSSN_s(base)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 607.cactuBSSN_s(peak)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 603.bwaves_s(peak) 649.fotonik3d_s(peak) 654.roms_s(peak)

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 621.wrf_s(base) 627.cam4_s(base, peak) 628.pop2_s(base)

ifort (IFORT) 18.0.0 20170811

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed2017_fp_base = 102

ThinkSystem SR650
(3.00 GHz, Intel Xeon Gold 6136)

SPECspeed2017_fp_peak = 103

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Oct-2017
Hardware Availability: Aug-2017
Software Availability: Sep-2017

Compiler Version Notes (Continued)

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 621.wrf_s(peak) 628.pop2_s(peak)

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
ifort icc

Benchmarks using Fortran, C, and C++:
icpc icc ifort

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed2017_fp_base = 102

ThinkSystem SR650
(3.00 GHz, Intel Xeon Gold 6136)

SPECspeed2017_fp_peak = 103

CPU2017 License: 9017

Test Date: Oct-2017

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:

```
-DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp  
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP  
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP  
-nostandard-realloc-lhs -align array32byte
```

Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

Fortran benchmarks:

```
-m64
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11
```

Peak Compiler Invocation

C benchmarks:

```
icc
```

Fortran benchmarks:

```
ifort
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECspeed2017_fp_base = 102

ThinkSystem SR650
(3.00 GHz, Intel Xeon Gold 6136)

SPECspeed2017_fp_peak = 103

CPU2017 License: 9017

Test Date: Oct-2017

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

```
ifort icc
```

Benchmarks using Fortran, C, and C++:

```
icpc icc ifort
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
619.lbm_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX512  
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div  
-qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp  
-DSPEC_OPENMP
```

```
638.imagick_s: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp  
-DSPEC_OPENMP
```

644.nab_s: Same as 638.imagick_s

Fortran benchmarks:

```
-prof-gen(pass 1) -prof-use(pass 2) -DSPEC_SUPPRESS_OPENMP  
-DSPEC_OPENMP -O2 -xCORE-AVX512 -qopt-prefetch -ipo -O3  
-ffinite-math-only -no-prec-div -qopt-mem-layout-trans=3 -qopenmp  
-nonstandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
621.wrf_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX512  
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div  
-qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp  
-DSPEC_OPENMP -nonstandard-realloc-lhs -align array32byte
```

```
627.cam4_s: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp  
-DSPEC_OPENMP -nonstandard-realloc-lhs -align array32byte
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650
(3.00 GHz, Intel Xeon Gold 6136)

SPECspeed2017_fp_base = 102

SPECspeed2017_fp_peak = 103

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Oct-2017

Hardware Availability: Aug-2017

Software Availability: Sep-2017

Peak Optimization Flags (Continued)

628.pop2_s: Same as 621.wrf_s

Benchmarks using Fortran, C, and C++:

```
-prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX512 -qopt-prefetch  
-ipo -O3 -ffinite-math-only -no-prec-div -qopt-mem-layout-trans=3  
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP -nostandard-realloc-lhs  
-align array32byte
```

Peak Other Flags

C benchmarks:

```
-m64 -std=c11
```

Fortran benchmarks:

```
-m64
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-A.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2017-10-23 06:11:51-0400.

Report generated on 2018-10-31 16:50:58 by CPU2017 PDF formatter v6067.

Originally published on 2018-03-06.