



SPEC® CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed2017_fp_base = 36.6

PowerEdge C6420 (Intel Xeon Bronze 3104, 1.70 GHz)

SPECspeed2017_fp_peak = 37.2

CPU2017 License: 55


Test Date: Dec-2017

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

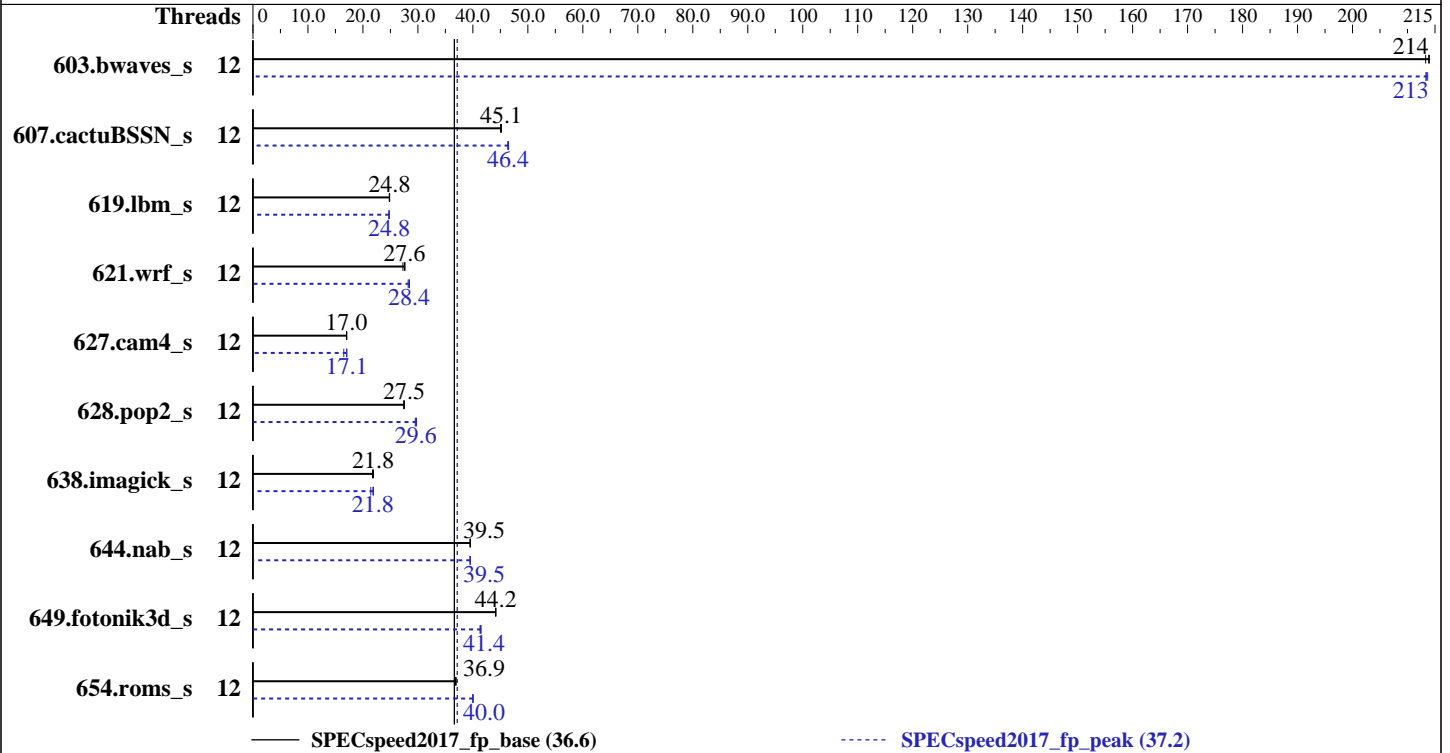

Hardware

CPU Name: Intel Xeon Bronze 3104
 Max MHz.: 1700
 Nominal: 1700
 Enabled: 12 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 8.25 MB I+D on chip per chip
 Other: None
 Memory: 192 GB (12 x 16 GB 2Rx8 PC4-2666V-R, running at 2133)
 Storage: 480GB SATA SSD
 Other: None

Software

OS: CentOS Linux release 7.4.1708 (Core)
 3.10.0-693.5.2.el7.x86_64
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++
 Compiler for Linux;
 Fortran: Version 18.0.0.128 of Intel Fortran
 Compiler for Linux
 Parallel: Yes
 Firmware: Version 1.0.8 released Jul-2017
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECSpeed2017_fp_base = 36.6

PowerEdge C6420 (Intel Xeon Bronze 3104, 1.70 GHz)

SPECSpeed2017_fp_peak = 37.2

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Dec-2017
Hardware Availability: Sep-2017
Software Availability: Sep-2017

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	12	277	213	276	214	276	214	12	276	213	277	213	276	214
607.cactuBSSN_s	12	369	45.1	369	45.2	370	45.0	12	359	46.5	360	46.3	359	46.4
619.lbm_s	12	211	24.9	211	24.8	211	24.8	12	211	24.8	212	24.8	212	24.7
621.wrf_s	12	480	27.6	478	27.7	485	27.3	12	469	28.2	465	28.5	466	28.4
627.cam4_s	12	520	17.0	521	17.0	520	17.1	12	520	17.1	537	16.5	520	17.1
628.pop2_s	12	431	27.5	432	27.5	433	27.4	12	399	29.8	401	29.6	402	29.5
638.imagick_s	12	663	21.7	661	21.8	659	21.9	12	661	21.8	658	21.9	673	21.4
644.nab_s	12	442	39.5	442	39.5	442	39.5	12	442	39.5	442	39.5	442	39.5
649.fotonik3d_s	12	206	44.2	206	44.2	207	44.1	12	221	41.3	220	41.5	220	41.4
654.roms_s	12	426	36.9	427	36.9	427	36.9	12	394	40.0	393	40.0	394	40.0

SPECSpeed2017_fp_base = 36.6

SPECSpeed2017_fp_peak = 37.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/root/cpu2017/lib/ia32:/root/cpu2017/lib/intel64:/root/cpu2017/je5.0.1-32:/root/cpu2017/je5.0.1-64"

OMP_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

No: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

This benchmark result is intended to provide perspective on past performance using the historical hardware and/or software described on this result page.

The system as described on this result page was formerly

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed2017_fp_base = 36.6

PowerEdge C6420 (Intel Xeon Bronze 3104, 1.70 GHz)

SPECspeed2017_fp_peak = 37.2

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

General Notes (Continued)

generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC OSG Policy document, <http://www.spec.org/osg/policy.html>

This measured result may not be representative of the result that would be measured were this benchmark run with hardware and software available as of the publication date.

Platform Notes

BIOS settings:

Virtualization Technology disabled

System Profile set to Custom

CPU Power Management set to Maximum Performance

Memory Frequency set to Maximum Performance

Turbo Boost enabled

C States disabled

Memory Patrol Scrub disabled

PCI ASPM L1 Link Power Management disabled

Sysinfo program /root/cpu2017/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on localhost.localdomain Sat Dec 16 10:19:10 2017

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Bronze 3104 CPU @ 1.70GHz

2 "physical id"s (chips)

12 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 6

siblings : 6

physical 0: cores 0 1 2 3 4 5

physical 1: cores 0 1 2 3 4 5

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 12

On-line CPU(s) list: 0-11

Thread(s) per core: 1

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed2017_fp_base = 36.6

PowerEdge C6420 (Intel Xeon Bronze 3104, 1.70 GHz)

SPECspeed2017_fp_peak = 37.2

CPU2017 License: 55

Test Date: Dec-2017

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

Platform Notes (Continued)

```

Core(s) per socket:      6
Socket(s):               2
NUMA node(s):           2
Vendor ID:               GenuineIntel
CPU family:              6
Model:                   85
Model name:              Intel(R) Xeon(R) Bronze 3104 CPU @ 1.70GHz
Stepping:                4
CPU MHz:                 1700.000
BogoMIPS:                3400.00
Virtualization:          VT-x
L1d cache:               32K
L1i cache:               32K
L2 cache:                1024K
L3 cache:                8448K
NUMA node0 CPU(s):      0,2,4,6,8,10
NUMA node1 CPU(s):      1,3,5,7,9,11
Flags:                    fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 fma
cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx fl16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 intel_pt
tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2
erms invpcid rtm cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb
avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc
cqm_mbm_total cqm_mbm_local dtherm arat pln pts

```

```

/proc/cpuinfo cache data
cache size : 8448 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0 2 4 6 8 10
node 0 size: 96965 MB
node 0 free: 88575 MB
node 1 cpus: 1 3 5 7 9 11
node 1 size: 98304 MB
node 1 free: 93253 MB
node distances:
node    0    1
 0:   10   21
 1:   21   10

```

```

From /proc/meminfo
MemTotal:      196690028 kB

```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed2017_fp_base = 36.6

PowerEdge C6420 (Intel Xeon Bronze 3104, 1.70 GHz)

SPECspeed2017_fp_peak = 37.2

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Platform Notes (Continued)

HugePages_Total: 128
Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

```
centos-release: CentOS Linux release 7.4.1708 (Core)
centos-release-upstream: Derived from Red Hat Enterprise Linux 7.4 (Source)
os-release:
  NAME="CentOS Linux"
  VERSION="7 (Core)"
  ID="centos"
  ID_LIKE="rhel fedora"
  VERSION_ID="7"
  PRETTY_NAME="CentOS Linux 7 (Core)"
  ANSI_COLOR="0;31"
  CPE_NAME="cpe:/o:centos:centos:7"
redhat-release: CentOS Linux release 7.4.1708 (Core)
system-release: CentOS Linux release 7.4.1708 (Core)
system-release-cpe: cpe:/o:centos:centos:7
```

uname -a:

```
Linux localhost.localdomain 3.10.0-693.5.2.el7.x86_64 #1 SMP Fri Oct 20 20:32:50 UTC
2017 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Dec 15 00:07

SPEC is set to: /root/cpu2017

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        xfs   433G   24G  409G   6% /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 1.0.8 07/12/2017

Memory:

```
12x 002C00B3002C 18ASF2G72PDZ-2G6D1 16 GB 2 rank 2666, configured at 2133
4x Not Specified Not Specified
```

(End of data from sysinfo program)

Compiler Version Notes

=====
CC 619.lbm_s(base) 638.imagick_s(base, peak) 644.nab_s(base, peak)
=====

icc (ICC) 18.0.0 20170811

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed2017_fp_base = 36.6

PowerEdge C6420 (Intel Xeon Bronze 3104, 1.70 GHz)

SPECspeed2017_fp_peak = 37.2

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Compiler Version Notes (Continued)

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 619.lbm_s(peak)

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 607.cactuBSSN_s(base)

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 607.cactuBSSN_s(peak)

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 603.bwaves_s(peak) 649.fotonik3d_s(peak) 654.roms_s(peak)

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed2017_fp_base = 36.6

PowerEdge C6420 (Intel Xeon Bronze 3104, 1.70 GHz)

SPECspeed2017_fp_peak = 37.2

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Compiler Version Notes (Continued)

CC 621.wrf_s(base) 627.cam4_s(base, peak) 628.pop2_s(base)

```
-----
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

=====
CC 621.wrf_s(peak) 628.pop2_s(peak)

```
-----
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

Base Compiler Invocation

C benchmarks:

icc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed2017_fp_base = 36.6

PowerEdge C6420 (Intel Xeon Bronze 3104, 1.70 GHz)

SPECspeed2017_fp_peak = 37.2

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Base Portability Flags (Continued)

654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP

Fortran benchmarks:

-DSPEC_OPENMP -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp
-nostandard-realloc-lhs -align array32byte

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs -align array32byte

Benchmarks using Fortran, C, and C++:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs -align array32byte

Base Other Flags

C benchmarks:

-m64 -std=c11

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed2017_fp_base = 36.6

PowerEdge C6420 (Intel Xeon Bronze 3104, 1.70 GHz)

SPECspeed2017_fp_peak = 37.2

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Peak Compiler Invocation

C benchmarks:

icc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
619.lbm_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX2
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div
-qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP
```

```
638.imagick_s: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp
-DSPEC_OPENMP
```

644.nab_s: Same as 638.imagick_s

Fortran benchmarks:

```
-prof-gen(pass 1) -prof-use(pass 2) -DSPEC_SUPPRESS_OPENMP
-DSPEC_OPENMP -O2 -xCORE-AVX2 -qopt-prefetch -ipo -O3
-ffinite-math-only -no-prec-div -qopt-mem-layout-trans=3 -qopenmp
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
621.wrf_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX2
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div
-qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed2017_fp_base = 36.6

PowerEdge C6420 (Intel Xeon Bronze 3104, 1.70 GHz)

SPECspeed2017_fp_peak = 37.2

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Peak Optimization Flags (Continued)

621.wrf_s (continued):

```
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte
```

627.cam4_s: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

```
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp
```

```
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte
```

628.pop2_s: Same as 621.wrf_s

Benchmarks using Fortran, C, and C++:

```
-prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX2 -qopt-prefetch
```

```
-ipo -O3 -ffinite-math-only -no-prec-div -qopt-mem-layout-trans=3
```

```
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP -nostandard-realloc-lhs
```

```
-align array32byte
```

Peak Other Flags

C benchmarks:

```
-m64 -std=c11
```

Fortran benchmarks:

```
-m64
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revD.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2017-12-16 11:19:09-0500.

Report generated on 2018-10-31 16:24:45 by CPU2017 PDF formatter v6067.

Originally published on 2018-02-27.