



# SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology


ThinkSystem SD530  
(2.20 GHz, Intel Xeon Silver 4114T)

SPECrate2017\_int\_base = 92.4

SPECrate2017\_int\_peak = 97.4

CPU2017 License: 9017  
Test Sponsor: Lenovo Global Technology  
Tested by: Lenovo Global Technology

Test Date: Mar-2018  
Hardware Availability: Aug-2017  
Software Availability: Sep-2017

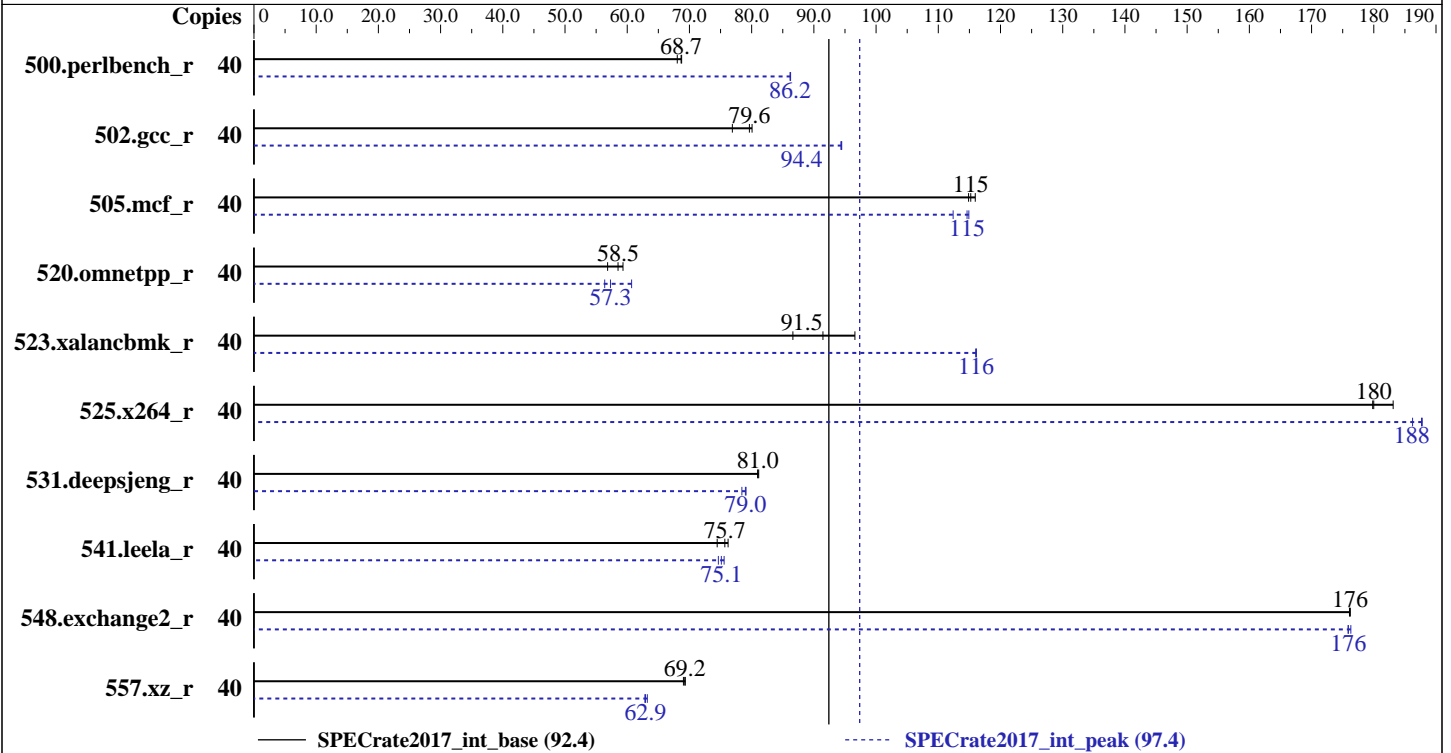

### Hardware

CPU Name: Intel Xeon Silver 4114T  
Max MHz.: 3000  
Nominal: 2200  
Enabled: 20 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 13.75 MB I+D on chip per chip  
Other: None  
Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2666V-R, running at 2400)  
Storage: 1 x 800 GB SAS SSD  
Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP2 (x86\_64)  
Kernel 4.4.114-92.64-default  
Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;  
Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux  
Parallel: No  
Firmware: Lenovo BIOS Version TEE121Q 1.30 released Feb-2018  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other: jemalloc: jemalloc memory allocator library V5.0.1



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate2017\_int\_base = 92.4

ThinkSystem SD530  
(2.20 GHz, Intel Xeon Silver 4114T)

SPECrate2017\_int\_peak = 97.4

CPU2017 License: 9017  
Test Sponsor: Lenovo Global Technology  
Tested by: Lenovo Global Technology

Test Date: Mar-2018  
Hardware Availability: Aug-2017  
Software Availability: Sep-2017

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	40	926	68.7	<b>928</b>	<b>68.7</b>	936	68.0	40	738	86.3	<b>739</b>	<b>86.2</b>	739	86.2
502.gcc_r	40	737	76.9	707	80.1	<b>711</b>	<b>79.6</b>	40	600	94.5	600	94.3	<b>600</b>	<b>94.4</b>
505.mcf_r	40	558	116	563	115	<b>561</b>	<b>115</b>	40	563	115	<b>564</b>	<b>115</b>	575	112
520.omnetpp_r	40	923	56.8	<b>897</b>	<b>58.5</b>	885	59.3	40	865	60.7	931	56.4	<b>916</b>	<b>57.3</b>
523.xalancbmk_r	40	488	86.6	<b>462</b>	<b>91.5</b>	437	96.6	40	<b>364</b>	<b>116</b>	364	116	364	116
525.x264_r	40	<b>389</b>	<b>180</b>	389	180	382	183	40	373	188	<b>373</b>	<b>188</b>	376	186
531.deepsjeng_r	40	<b>566</b>	<b>81.0</b>	566	81.0	565	81.1	40	<b>580</b>	<b>79.0</b>	584	78.4	580	79.1
541.leela_r	40	<b>875</b>	<b>75.7</b>	890	74.5	869	76.2	40	887	74.6	876	75.6	<b>882</b>	<b>75.1</b>
548.exchange2_r	40	<b>595</b>	<b>176</b>	595	176	595	176	40	596	176	594	176	<b>596</b>	<b>176</b>
557.xz_r	40	626	69.0	623	69.3	<b>624</b>	<b>69.2</b>	40	683	63.2	687	62.8	<b>686</b>	<b>62.9</b>

SPECrate2017\_int\_base = 92.4

SPECrate2017\_int\_peak = 97.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017.1.0.2.ic18.0/lib/ia32:/home/cpu2017.1.0.2.ic18.0/lib/intel64"  
LD\_LIBRARY\_PATH = "\$LD\_LIBRARY\_PATH:/home/cpu2017.1.0.2.ic18.0/je5.0.1-32:/home/cpu2017.1.0.2.ic18.0/je5.0.1-64"  
Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
jemalloc: configured and built at default for  
32bit (i686) and 64bit (x86\_64) targets;  
jemalloc: built with the RedHat Enterprise 7.4,  
and the system compiler gcc 4.8.5;  
jemalloc: sources available from jemalloc.net or  
<https://github.com/jemalloc/jemalloc/releases>

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECrate2017\_int\_base = 92.4

ThinkSystem SD530  
(2.20 GHz, Intel Xeon Silver 4114T)

SPECrate2017\_int\_peak = 97.4

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2018  
**Hardware Availability:** Aug-2017  
**Software Availability:** Sep-2017

## General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:  
Choose Operating Mode set to Maximum Performance  
SNC set to Enable  
DCU Streamer Prefetcher set to Disable  
MONITOR/MWAIT set to Enable  
Execute Disable Bit set to Disable  
DCA set to Enable  
Sysinfo program /home/cpu2017.1.0.2.ic18.0/bin/sysinfo  
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on stark-02-03 Tue Mar 27 16:37:08 2018

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Silver 4114T CPU @ 2.20GHz  
2 "physical id"s (chips)  
40 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 10  
siblings : 20  
physical 0: cores 0 1 2 3 4 8 9 10 11 12  
physical 1: cores 0 1 2 3 4 8 9 10 11 12

From lscpu:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 40  
On-line CPU(s) list: 0-39  
Thread(s) per core: 2  
Core(s) per socket: 10  
Socket(s): 2  
NUMA node(s): 2  
Vendor ID: GenuineIntel

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate2017\_int\_base = 92.4

ThinkSystem SD530  
(2.20 GHz, Intel Xeon Silver 4114T)

SPECrate2017\_int\_peak = 97.4

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2018  
**Hardware Availability:** Aug-2017  
**Software Availability:** Sep-2017

### Platform Notes (Continued)

```

CPU family:           6
Model:                85
Model name:           Intel(R) Xeon(R) Silver 4114T CPU @ 2.20GHz
Stepping:             4
CPU MHz:              2194.859
BogoMIPS:             4389.71
Virtualization:      VT-x
L1d cache:           32K
L1i cache:           32K
L2 cache:             1024K
L3 cache:            14080K
NUMA node0 CPU(s):   0-9,20-29
NUMA node1 CPU(s):   10-19,30-39
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts dtherm
intel_pt rsb_ctxsw spec_ctrl retpoline kaiser tpr_shadow vnmi flexpriority ept vpid
fsgsbase tsc_adjust bmil hle avx2 smep bmi2 erms invpcid rtm cqm mpx avx512f
avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec
xgetbv1 cqm_llc cqm_occup_llc

```

```

/proc/cpuinfo cache data
cache size : 14080 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 20 21 22 23 24 25 26 27 28 29
node 0 size: 193110 MB
node 0 free: 192433 MB
node 1 cpus: 10 11 12 13 14 15 16 17 18 19 30 31 32 33 34 35 36 37 38 39
node 1 size: 193504 MB
node 1 free: 192973 MB
node distances:
node  0  1
  0:  10  21
  1:  21  10

```

```

From /proc/meminfo
MemTotal:      395893728 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*

```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECrate2017\_int\_base = 92.4

ThinkSystem SD530  
(2.20 GHz, Intel Xeon Silver 4114T)

SPECrate2017\_int\_peak = 97.4

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2018  
**Hardware Availability:** Aug-2017  
**Software Availability:** Sep-2017

## Platform Notes (Continued)

```

SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 2
  # This file is deprecated and will be removed in a future service pack or release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP2"
  VERSION_ID="12.2"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:
  Linux stark-02-03 4.4.114-92.64-default #1 SMP Thu Feb 1 19:18:19 UTC 2018 (c6ce5db)
  x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jan 14 00:43

SPEC is set to: /home/cpu2017.1.0.2.ic18.0
  Filesystem      Type  Size  Used Avail Use% Mounted on
  /dev/sda4       xfs   689G  108G  581G  16% /home

Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
  BIOS Lenovo -[TEE121Q-1.30]- 02/07/2018
  Memory:
  4x NO DIMM NO DIMM
  12x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666, configured at 2400

(End of data from sysinfo program)

```

## Compiler Version Notes

```

=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
   525.x264_r(base, peak) 557.xz_r(base, peak)
-----
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----

```

(Continued on next page)



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SD530  
(2.20 GHz, Intel Xeon Silver 4114T)

SPECrate2017\_int\_base = 92.4

SPECrate2017\_int\_peak = 97.4

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2018  
**Hardware Availability:** Aug-2017  
**Software Availability:** Sep-2017

## Compiler Version Notes (Continued)

=====  
CC 500.perlbench\_r(peak) 502.gcc\_r(peak)  
-----

icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
CXXC 520.omnetpp\_r(base) 523.xalanbmk\_r(base) 531.deepsjeng\_r(base)  
541.leela\_r(base)  
-----

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
CXXC 520.omnetpp\_r(peak) 523.xalanbmk\_r(peak) 531.deepsjeng\_r(peak)  
541.leela\_r(peak)  
-----

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
FC 548.exchange2\_r(base, peak)  
-----

ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017\_int\_base = 92.4

ThinkSystem SD530  
(2.20 GHz, Intel Xeon Silver 4114T)

SPECrate2017\_int\_peak = 97.4

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2018

Hardware Availability: Aug-2017

Software Availability: Sep-2017

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

## Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

Fortran benchmarks:

```
-m64
```



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017\_int\_base = 92.4

ThinkSystem SD530  
(2.20 GHz, Intel Xeon Silver 4114T)

SPECrate2017\_int\_peak = 97.4

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Mar-2018

Hardware Availability: Aug-2017

Software Availability: Sep-2017

## Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-fno-strict-overflow -L/usr/local/je5.0.1-64/lib
-ljemalloc
```

```
502.gcc_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

```
505.mcf_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib
-ljemalloc
```

```
525.x264_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -fno-alias
```

(Continued on next page)





# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017\_int\_base = 92.4

ThinkSystem SD530  
(2.20 GHz, Intel Xeon Silver 4114T)

SPECrate2017\_int\_peak = 97.4

CPU2017 License: 9017

Test Date: Mar-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

## Peak Optimization Flags (Continued)

525.x264\_r (continued):

```
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

557.xz\_r: Same as 505.mcf\_r

C++ benchmarks:

```
520.omnetpp_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
523.xalancbmk_r: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32  
-Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

531.deepsjeng\_r: Same as 520.omnetpp\_r

541.leela\_r: Same as 520.omnetpp\_r

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

## Peak Other Flags

C benchmarks (except as noted below):

```
-m64 -std=c11
```

502.gcc\_r: -m32 -std=c11

C++ benchmarks (except as noted below):

```
-m64
```

523.xalancbmk\_r: -m32

Fortran benchmarks:

```
-m64
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-C.html>



# SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SD530  
(2.20 GHz, Intel Xeon Silver 4114T)

SPECrate2017\_int\_base = 92.4

SPECrate2017\_int\_peak = 97.4

**CPU2017 License:** 9017

**Test Sponsor:** Lenovo Global Technology

**Tested by:** Lenovo Global Technology

**Test Date:** Mar-2018

**Hardware Availability:** Aug-2017

**Software Availability:** Sep-2017

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-C.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-03-27 04:37:07-0400.

Report generated on 2018-10-31 17:26:27 by CPU2017 PDF formatter v6067.

Originally published on 2018-06-26.