



# SPEC® CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Huawei

SPECspeed2017\_fp\_base = 81.7

## Huawei 5288 V5 (Intel Xeon Gold 5118)

SPECspeed2017\_fp\_peak = 83.5

CPU2017 License: 3175


Test Sponsor: Huawei

Tested by: Huawei

Test Date: Jul-2018

Hardware Availability: Jul-2017

Software Availability: Jan-2018

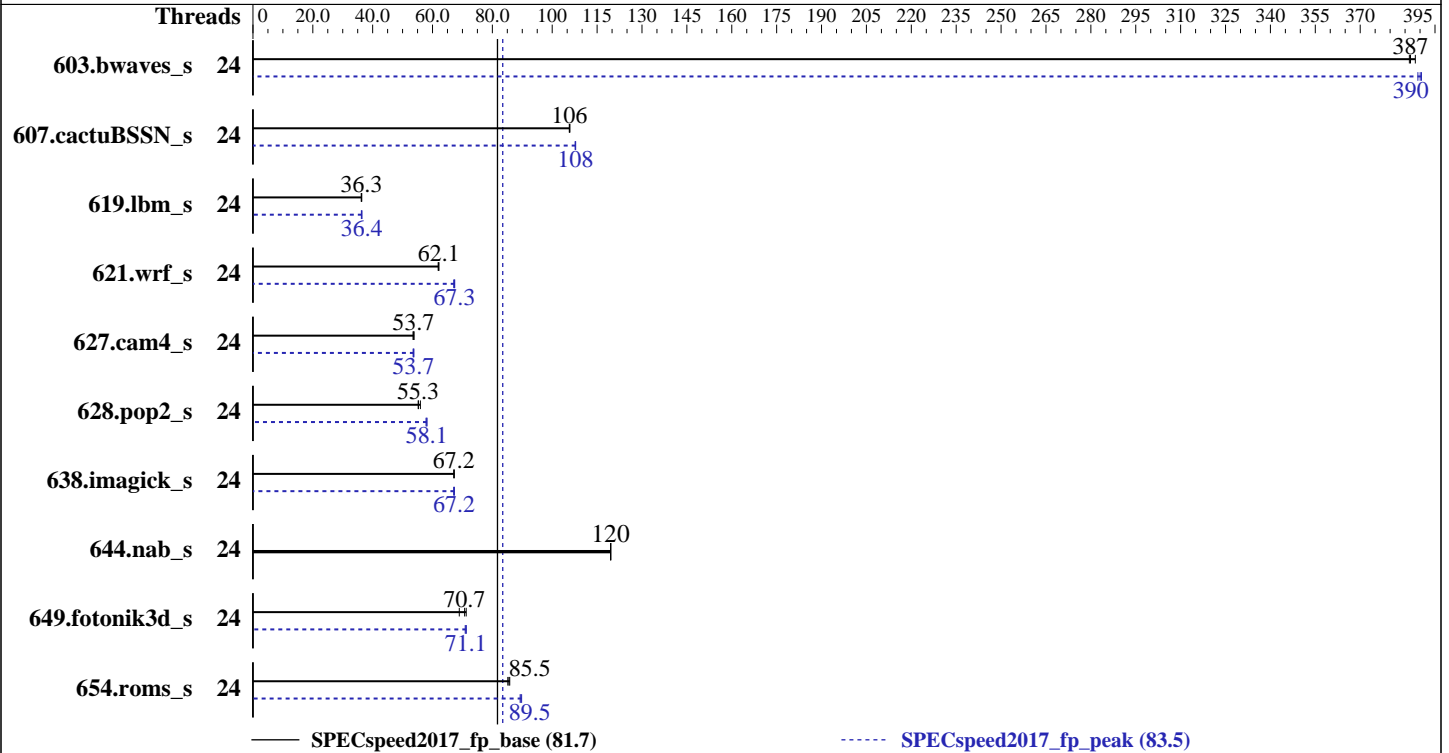

### Hardware

CPU Name: Intel Xeon Gold 5118  
 Max MHz.: 3200  
 Nominal: 2300  
 Enabled: 24 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 16.5 MB I+D on chip per chip  
 Other: None  
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2666V-R, running at 2400)  
 Storage: 1 x 1200 GB SAS, 10000 RPM  
 Other: None

### Software

OS: Red Hat Enterprise Linux Server release 7.4 (Maipo)  
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux  
 Parallel: Yes  
 Firmware: Version 0.81 Released Jul-2018  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Huawei

SPECspeed2017\_fp\_base = 81.7

## Huawei 5288 V5 (Intel Xeon Gold 5118)

SPECspeed2017\_fp\_peak = 83.5

CPU2017 License: 3175  
Test Sponsor: Huawei  
Tested by: Huawei

Test Date: Jul-2018  
Hardware Availability: Jul-2017  
Software Availability: Jan-2018

### Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	24	152	388	<b>153</b>	<b>387</b>	153	386	24	152	389	151	390	<b>151</b>	<b>390</b>
607.cactuBSSN_s	24	158	106	157	106	<b>158</b>	<b>106</b>	24	155	108	<b>155</b>	<b>108</b>	155	108
619.lbm_s	24	144	36.4	145	36.2	<b>144</b>	<b>36.3</b>	24	145	36.2	<b>144</b>	<b>36.4</b>	144	36.4
621.wrf_s	24	213	62.1	214	61.9	<b>213</b>	<b>62.1</b>	24	<b>196</b>	<b>67.3</b>	197	67.1	196	67.4
627.cam4_s	24	166	53.5	165	53.8	<b>165</b>	<b>53.7</b>	24	<b>165</b>	<b>53.7</b>	166	53.5	165	53.8
628.pop2_s	24	212	56.0	215	55.3	<b>215</b>	<b>55.3</b>	24	<b>204</b>	<b>58.1</b>	204	58.2	205	57.8
638.imagick_s	24	<b>215</b>	<b>67.2</b>	215	67.1	214	67.3	24	214	67.3	<b>215</b>	<b>67.2</b>	215	67.1
644.nab_s	24	<b>146</b>	<b>120</b>	146	120	146	120	24	<b>146</b>	<b>120</b>	146	120	146	120
649.fotonik3d_s	24	132	68.9	<b>129</b>	<b>70.7</b>	128	71.3	24	129	70.9	<b>128</b>	<b>71.1</b>	128	71.3
654.roms_s	24	185	85.2	<b>184</b>	<b>85.5</b>	183	85.8	24	175	89.8	176	89.3	<b>176</b>	<b>89.5</b>

SPECspeed2017\_fp\_base = 81.7

SPECspeed2017\_fp\_peak = 83.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

### General Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/spec2017/lib/ia32:/spec2017/lib/intel64:/spec2017/je5.0.1-32:/spec2017/je5.0.1-64"

OMP\_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

### Platform Notes

BIOS configuration:

Power Policy Set to Load Balance

Hyper-Threading Set to Disable

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Huawei

SPECspeed2017\_fp\_base = 81.7

## Huawei 5288 V5 (Intel Xeon Gold 5118)

SPECspeed2017\_fp\_peak = 83.5

**CPU2017 License:** 3175  
**Test Sponsor:** Huawei  
**Tested by:** Huawei

**Test Date:** Jul-2018  
**Hardware Availability:** Jul-2017  
**Software Availability:** Jan-2018

### Platform Notes (Continued)

XPT Prefetch Set to Enabled  
Sysinfo program /spec2017/bin/sysinfo  
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on localhost.localdomain Tue Jul 31 00:47:13 2018

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Gold 5118 CPU @ 2.30GHz  
2 "physical id"s (chips)  
24 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 12  
siblings : 12  
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13  
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13

From lscpu:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 24  
On-line CPU(s) list: 0-23  
Thread(s) per core: 1  
Core(s) per socket: 12  
Socket(s): 2  
NUMA node(s): 2  
Vendor ID: GenuineIntel  
CPU family: 6  
Model: 85  
Model name: Intel(R) Xeon(R) Gold 5118 CPU @ 2.30GHz  
Stepping: 4  
CPU MHz: 2301.000  
CPU max MHz: 2301.0000  
CPU min MHz: 1000.0000  
BogoMIPS: 4600.00  
Virtualization: VT-x  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 1024K  
L3 cache: 16896K  
NUMA node0 CPU(s): 0-11  
NUMA node1 CPU(s): 12-23  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017\_fp\_base = 81.7

Huawei 5288 V5 (Intel Xeon Gold 5118)

SPECspeed2017\_fp\_peak = 83.5

CPU2017 License: 3175  
Test Sponsor: Huawei  
Tested by: Huawei

Test Date: Jul-2018  
Hardware Availability: Jul-2017  
Software Availability: Jan-2018

## Platform Notes (Continued)

pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp  
lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc  
aperfmpperf eagerfpu pni pclmulqdq dtes64 ds\_cpl vmx smx est tm2 ssse3 fma cx16 xtpr  
pdc\_m pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx  
f16c rdrand lahf\_lm abm 3dnowprefetch epb cat\_l3 cdp\_l3 invpcid\_single intel\_pt  
spec\_ctrl ibpb\_support tpr\_shadow vnmi flexpriority ept vpid fsgsbase tsc\_adjust  
bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt\_a avx512f avx512dq rdseed adx  
smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm\_llc  
cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local dtherm ida arat pln pts

/proc/cpuinfo cache data  
cache size : 16896 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)  
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11  
node 0 size: 391349 MB  
node 0 free: 378298 MB  
node 1 cpus: 12 13 14 15 16 17 18 19 20 21 22 23  
node 1 size: 393216 MB  
node 1 free: 381536 MB  
node distances:  
node 0 1  
0: 10 21  
1: 21 10

From /proc/meminfo  
MemTotal: 790512260 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*  
os-release:  
NAME="Red Hat Enterprise Linux Server"  
VERSION="7.4 (Maipo)"  
ID="rhel"  
ID\_LIKE="fedora"  
VARIANT="Server"  
VARIANT\_ID="server"  
VERSION\_ID="7.4"  
PRETTY\_NAME="Red Hat Enterprise Linux Server 7.4 (Maipo)"  
redhat-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)  
system-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)  
system-release-cpe: cpe:/o:redhat:enterprise\_linux:7.4:ga:server

uname -a:

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Huawei

SPECspeed2017\_fp\_base = 81.7

## Huawei 5288 V5 (Intel Xeon Gold 5118)

SPECspeed2017\_fp\_peak = 83.5

**CPU2017 License:** 3175  
**Test Sponsor:** Huawei  
**Tested by:** Huawei

**Test Date:** Jul-2018  
**Hardware Availability:** Jul-2017  
**Software Availability:** Jan-2018

### Platform Notes (Continued)

Linux localhost.localdomain 3.10.0-693.11.6.el7.x86\_64 #1 SMP Thu Dec 28 14:23:39 EST 2017 x86\_64 x86\_64 x86\_64 GNU/Linux

run-level 3 Jul 30 18:47

SPEC is set to: /spec2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	xf	781G	95G	687G	13%	/

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS INSYDE Corp. 0.81 07/02/2018

Memory:

24x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666, configured at 2400

(End of data from sysinfo program)

### Compiler Version Notes

=====  
CC 619.lbm\_s(base) 638.imagick\_s(base, peak) 644.nab\_s(base, peak)

-----  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
CC 619.lbm\_s(peak)

-----  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
FC 607.cactuBSSN\_s(base)

-----  
icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Huawei**

SPECspeed2017\_fp\_base = 81.7

**Huawei 5288 V5 (Intel Xeon Gold 5118)**

SPECspeed2017\_fp\_peak = 83.5

**CPU2017 License:** 3175  
**Test Sponsor:** Huawei  
**Tested by:** Huawei

**Test Date:** Jul-2018  
**Hardware Availability:** Jul-2017  
**Software Availability:** Jan-2018

## Compiler Version Notes (Continued)

=====  
FC 607.cactuBSSN\_s(peak)  
-----

icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
FC 603.bwaves\_s(base) 649.fotonik3d\_s(base) 654.roms\_s(base)  
-----

ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
FC 603.bwaves\_s(peak) 649.fotonik3d\_s(peak) 654.roms\_s(peak)  
-----

ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
CC 621.wrf\_s(base) 627.cam4\_s(base, peak) 628.pop2\_s(base)  
-----

ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
CC 621.wrf\_s(peak) 628.pop2\_s(peak)  
-----

ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017\_fp\_base = 81.7

Huawei 5288 V5 (Intel Xeon Gold 5118)

SPECspeed2017\_fp\_peak = 83.5

CPU2017 License: 3175  
Test Sponsor: Huawei  
Tested by: Huawei

Test Date: Jul-2018  
Hardware Availability: Jul-2017  
Software Availability: Jan-2018

## Base Compiler Invocation

C benchmarks:

icc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactuBSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
627.cam4\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
628.pop2\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
-assume byterecl  
638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64  
649.fotonik3d\_s: -DSPEC\_LP64  
654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -qopenmp -DSPEC\_OPENMP

Fortran benchmarks:

-DSPEC\_OPENMP -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp  
-nostandard-realloc-lhs -align array32byte

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -qopenmp -DSPEC\_OPENMP  
-nostandard-realloc-lhs -align array32byte

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017\_fp\_base = 81.7

Huawei 5288 V5 (Intel Xeon Gold 5118)

SPECspeed2017\_fp\_peak = 83.5

CPU2017 License: 3175  
Test Sponsor: Huawei  
Tested by: Huawei

Test Date: Jul-2018  
Hardware Availability: Jul-2017  
Software Availability: Jan-2018

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs -align array32byte
```

## Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

Fortran benchmarks:

```
-m64
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11
```

## Peak Compiler Invocation

C benchmarks:

```
icc
```

Fortran benchmarks:

```
ifort
```

Benchmarks using both Fortran and C:

```
ifort icc
```

Benchmarks using Fortran, C, and C++:

```
icpc icc ifort
```

## Peak Portability Flags

Same as Base Portability Flags





# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017\_fp\_base = 81.7

Huawei 5288 V5 (Intel Xeon Gold 5118)

SPECspeed2017\_fp\_peak = 83.5

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: Jul-2018

Hardware Availability: Jul-2017

Software Availability: Jan-2018

## Peak Optimization Flags

C benchmarks:

```
619.lbm_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX2
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div
-qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP
```

```
638.imagick_s: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp
-DSPEC_OPENMP
```

```
644.nab_s: basepeak = yes
```

Fortran benchmarks:

```
-prof-gen(pass 1) -prof-use(pass 2) -DSPEC_SUPPRESS_OPENMP
-DSPEC_OPENMP -O2 -xCORE-AVX2 -qopt-prefetch -ipo -O3
-ffinite-math-only -no-prec-div -qopt-mem-layout-trans=3 -qopenmp
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
621.wrf_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX2
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div
-qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte
```

```
627.cam4_s: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte
```

```
628.pop2_s: Same as 621.wrf_s
```

Benchmarks using Fortran, C, and C++:

```
-prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX2 -qopt-prefetch
-ipo -O3 -ffinite-math-only -no-prec-div -qopt-mem-layout-trans=3
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP -nostandard-realloc-lhs
-align array32byte
```

## Peak Other Flags

C benchmarks:

```
-m64 -std=c11
```

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECspeed2017\_fp\_base = 81.7

Huawei 5288 V5 (Intel Xeon Gold 5118)

SPECspeed2017\_fp\_peak = 83.5

CPU2017 License: 3175  
Test Sponsor: Huawei  
Tested by: Huawei

Test Date: Jul-2018  
Hardware Availability: Jul-2017  
Software Availability: Jan-2018

## Peak Other Flags (Continued)

Fortran benchmarks:  
-m64

Benchmarks using both Fortran and C:  
-m64 -std=c11

Benchmarks using Fortran, C, and C++:  
-m64 -std=c11

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.9-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.9-revC.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-07-31 00:47:12-0400.  
Report generated on 2018-10-31 18:46:56 by CPU2017 PDF formatter v6067.  
Originally published on 2018-08-22.