



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860
(3.00 GHz, Intel Xeon Gold 6154)

SPECrate2017_int_base = 418

SPECrate2017_int_peak = 442

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jul-2018

Hardware Availability: Nov-2017

Software Availability: May-2018

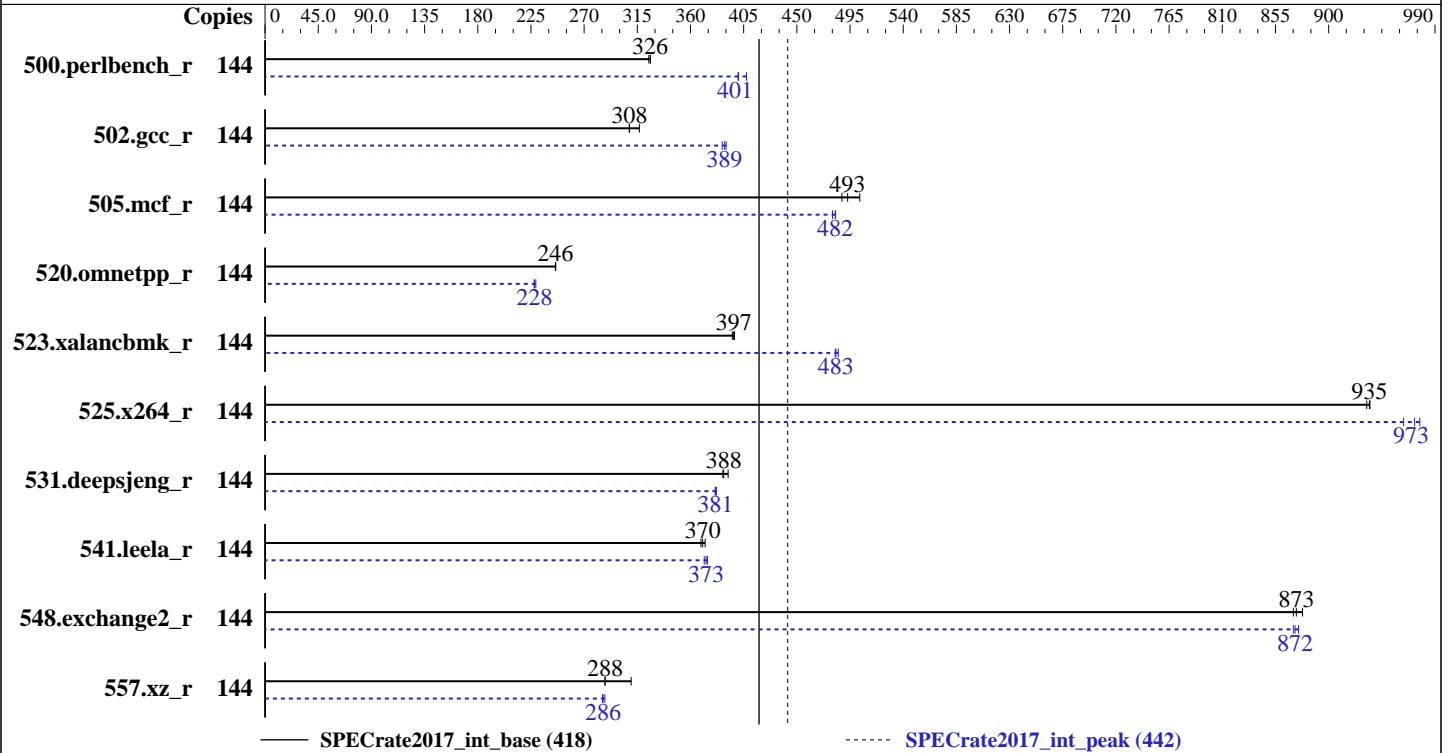

Hardware

CPU Name: Intel Xeon Gold 6154
 Max MHz.: 3700
 Nominal: 3000
 Enabled: 72 cores, 4 chips, 2 threads/core
 Orderable: 2,4 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 24.75 MB I+D on chip per chip
 Other: None
 Memory: 768 GB (48 x 16 GB 2Rx8 PC4-2666V-R)
 Storage: 1 x 800 GB SAS SSD
 Other: None

Software

OS: Red Hat Enterprise Linux Server release 7.4 (Maipo)
 Kernel 3.10.0-693.25.7.el7.x86_64
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;
 Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
 Parallel: No
 Firmware: Lenovo BIOS Version TEE123N 1.40 released Jun-2018
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc: jemalloc memory allocator library V5.0.1



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860
(3.00 GHz, Intel Xeon Gold 6154)

SPECrate2017_int_base = 418

SPECrate2017_int_peak = 442

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jul-2018
Hardware Availability: Nov-2017
Software Availability: May-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	144	703	326	703	326	706	325	144	563	407	572	401	573	400
502.gcc_r	144	661	308	661	308	644	317	144	524	389	523	390	527	387
505.mcf_r	144	462	503	472	493	477	488	144	482	483	485	480	482	482
520.omnetpp_r	144	768	246	769	246	769	246	144	825	229	829	228	830	228
523.xalancbmk_r	144	383	397	383	397	385	395	144	315	483	313	485	315	482
525.x264_r	144	270	935	270	932	270	935	144	262	963	258	977	259	973
531.deepsjeng_r	144	421	392	425	388	426	387	144	433	381	433	381	432	382
541.leela_r	144	640	372	646	369	644	370	144	639	373	637	374	642	372
548.exchange2_r	144	434	870	432	873	430	878	144	431	875	434	870	433	872
557.xz_r	144	502	310	541	288	540	288	144	541	288	545	286	544	286

SPECrate2017_int_base = 418

SPECrate2017_int_peak = 442

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2017.1.0.2.ic18.0/lib/ia32:/home/cpu2017.1.0.2.ic18.0/lib/intel64"
LD_LIBRARY_PATH = "$LD_LIBRARY_PATH:/home/cpu2017.1.0.2.ic18.0/je5.0.1-32:/home/cpu2017.1.0.2.ic18.0/je5.0.1-64"
Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
jemalloc: configured and built at default for
32bit (i686) and 64bit (x86_64) targets;
jemalloc: built with the RedHat Enterprise 7.4,
and the system compiler gcc 4.8.5;
jemalloc: sources available from jemalloc.net or
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860
(3.00 GHz, Intel Xeon Gold 6154)

SPECrate2017_int_base = 418

SPECrate2017_int_peak = 442

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jul-2018
Hardware Availability: Nov-2017
Software Availability: May-2018

General Notes (Continued)

<https://github.com/jemalloc/jemalloc/releases>

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Choose Operating Mode set to Custom Mode

CPU P-state Control set to None

Page Policy set to Adaptive

C-States set to Legacy

Energy Efficient Turbo set to Disable

Platform Controlled Type set to Maximum Performance

DCU Streamer Prefetcher set to Disable

DCU IP Prefetcher set to Disable

SNC set to Enable

 Sysinfo program /home/cpu2017.1.0.2.icl8.0/bin/sysinfo

 Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

 running on SR860 Mon Jul 30 11:38:45 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6154 CPU @ 3.00GHz

 4 "physical id"s (chips)

 144 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

 cpu cores : 18

 siblings : 36

 physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

 physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

 physical 2: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

 physical 3: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 144

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017_int_base = 418

ThinkSystem SR860
(3.00 GHz, Intel Xeon Gold 6154)

SPECrate2017_int_peak = 442

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: Jul-2018
Hardware Availability: Nov-2017
Software Availability: May-2018

Platform Notes (Continued)

```

On-line CPU(s) list:    0-143
Thread(s) per core:    2
Core(s) per socket:    18
Socket(s):              4
NUMA node(s):          8
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  85
Model name:             Intel(R) Xeon(R) Gold 6154 CPU @ 3.00GHz
Stepping:               4
CPU MHz:                3001.000
CPU max MHz:            3001.0000
CPU min MHz:            1200.0000
BogoMIPS:               6000.00
Virtualization:         VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:               1024K
L3 cache:               25344K
NUMA node0 CPU(s):     0-2,5,6,9,10,14,15,72-74,77,78,81,82,86,87
NUMA node1 CPU(s):     3,4,7,8,11-13,16,17,75,76,79,80,83-85,88,89
NUMA node2 CPU(s):     18-20,23,24,27,28,32,33,90-92,95,96,99,100,104,105
NUMA node3 CPU(s):     21,22,25,26,29-31,34,35,93,94,97,98,101-103,106,107
NUMA node4 CPU(s):     36-38,41,42,45,46,50,51,108-110,113,114,117,118,122,123
NUMA node5 CPU(s):     39,40,43,44,47-49,52,53,111,112,115,116,119-121,124,125
NUMA node6 CPU(s):     54-56,59,60,63,64,68,69,126-128,131,132,135,136,140,141
NUMA node7 CPU(s):     57,58,61,62,65-67,70,71,129,130,133,134,137-139,142,143
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 fma cx16 xtpr
pdc cm cid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx
f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 invpcid_single intel_pt
tpr_shadow vmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2
erms invpcid rtm cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb
avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc
cqm_mbm_total cqm_mbm_local ibpb ibrs stibp dtherm ida arat pln pts spec_ctrl
intel_stibp ssbd

```

```
/proc/cpuinfo cache data
cache size : 25344 KB
```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 5 6 9 10 14 15 72 73 74 77 78 81 82 86 87
node 0 size: 97981 MB

```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860
(3.00 GHz, Intel Xeon Gold 6154)

SPECrate2017_int_base = 418

SPECrate2017_int_peak = 442

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jul-2018

Hardware Availability: Nov-2017

Software Availability: May-2018

Platform Notes (Continued)

```

node 0 free: 95600 MB
node 1 cpus: 3 4 7 8 11 12 13 16 17 75 76 79 80 83 84 85 88 89
node 1 size: 98304 MB
node 1 free: 95987 MB
node 2 cpus: 18 19 20 23 24 27 28 32 33 90 91 92 95 96 99 100 104 105
node 2 size: 98304 MB
node 2 free: 96077 MB
node 3 cpus: 21 22 25 26 29 30 31 34 35 93 94 97 98 101 102 103 106 107
node 3 size: 98304 MB
node 3 free: 96009 MB
node 4 cpus: 36 37 38 41 42 45 46 50 51 108 109 110 113 114 117 118 122 123
node 4 size: 98304 MB
node 4 free: 96060 MB
node 5 cpus: 39 40 43 44 47 48 49 52 53 111 112 115 116 119 120 121 124 125
node 5 size: 98304 MB
node 5 free: 96060 MB
node 6 cpus: 54 55 56 59 60 63 64 68 69 126 127 128 131 132 135 136 140 141
node 6 size: 98304 MB
node 6 free: 96062 MB
node 7 cpus: 57 58 61 62 65 66 67 70 71 129 130 133 134 137 138 139 142 143
node 7 size: 98304 MB
node 7 free: 95948 MB
node distances:
node  0  1  2  3  4  5  6  7
  0: 10 11 21 21 21 21 31 31
  1: 11 10 21 21 21 21 31 31
  2: 21 21 10 11 31 31 21 21
  3: 21 21 11 10 31 31 21 21
  4: 21 21 31 31 10 11 21 21
  5: 21 21 31 31 11 10 21 21
  6: 31 31 21 21 21 21 10 11
  7: 31 31 21 21 21 21 11 10

```

From /proc/meminfo

```

MemTotal:      792250616 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

From /etc/*release* /etc/*version*

```

os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.4 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VARIANT="Server"
VARIANT_ID="server"
VERSION_ID="7.4"

```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860
(3.00 GHz, Intel Xeon Gold 6154)

SPECrate2017_int_base = 418

SPECrate2017_int_peak = 442

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jul-2018

Hardware Availability: Nov-2017

Software Availability: May-2018

Platform Notes (Continued)

```
PRETTY_NAME="Red Hat Enterprise Linux Server 7.4 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.4:ga:server
```

```
uname -a:
Linux SR860 3.10.0-693.25.7.el7.x86_64 #1 SMP Sat May 19 04:36:04 UTC 2018 x86_64
x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jul 30 11:36
```

```
SPEC is set to: /home/cpu2017.1.0.2.ic18.0
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   686G  114G  573G  17% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS Lenovo -[TEE123N-1.40]- 06/12/2018
Memory:
48x Samsung M393A2K43BB1-CTD 16 GB 2 rank 2666
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====  
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)  
525.x264_r(base, peak) 557.xz_r(base, peak)  
-----
```

```
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----
```

```
=====  
CC 500.perlbench_r(peak) 502.gcc_r(peak)  
-----
```

```
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----
```

```
=====  
CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)  
541.leela_r(base)  
-----
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860
(3.00 GHz, Intel Xeon Gold 6154)

SPECrate2017_int_base = 418

SPECrate2017_int_peak = 442

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jul-2018

Hardware Availability: Nov-2017

Software Availability: May-2018

Compiler Version Notes (Continued)

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CXXC 520.omnetpp_r(peak) 523.xalancbmk_r(peak) 531.deepsjeng_r(peak)
541.leela_r(peak)

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 548.exchange2_r(base, peak)

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64

502 gcc_r: -DSPEC_LP64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860
(3.00 GHz, Intel Xeon Gold 6154)

SPECrate2017_int_base = 418

SPECrate2017_int_peak = 442

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jul-2018

Hardware Availability: Nov-2017

Software Availability: May-2018

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64 -std=c11
```

```
502.gcc_r: icc -m32 -std=c11 -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
523.xalancbmk_r: icpc -m32 -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32
```

Fortran benchmarks:

```
ifort -m64
```

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64  
502.gcc_r: -D_FILE_OFFSET_BITS=64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX  
525.x264_r: -DSPEC_LP64  
531.deepsjeng_r: -DSPEC_LP64  
541.leela_r: -DSPEC_LP64  
548.exchange2_r: -DSPEC_LP64  
557.xz_r: -DSPEC_LP64
```




SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860
(3.00 GHz, Intel Xeon Gold 6154)

SPECrate2017_int_base = 418

SPECrate2017_int_peak = 442

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jul-2018

Hardware Availability: Nov-2017

Software Availability: May-2018

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-fno-strict-overflow -L/usr/local/je5.0.1-64/lib
-ljemalloc
```

```
502.gcc_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

```
505.mcf_r: -w1,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib
-ljemalloc
```

```
525.x264_r: -w1,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -fno-alias
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

557.xz_r: Same as 505.mcf_r

C++ benchmarks:

```
520.omnetpp_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
523.xalancbmk_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

531.deepsjeng_r: Same as 520.omnetpp_r

541.leela_r: Same as 520.omnetpp_r

Fortran benchmarks:

```
-w1,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-G.html>



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860
(3.00 GHz, Intel Xeon Gold 6154)

SPECrate2017_int_base = 418

SPECrate2017_int_peak = 442

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jul-2018

Hardware Availability: Nov-2017

Software Availability: May-2018

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-G.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-07-29 23:38:44-0400.

Report generated on 2018-10-31 18:41:37 by CPU2017 PDF formatter v6067.

Originally published on 2018-08-21.