



SPEC® CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.00 GHz, Intel Xeon Gold 5117)

SPECspeed2017_fp_base = 79.5

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2018

Hardware Availability: Aug-2018

Software Availability: Mar-2018

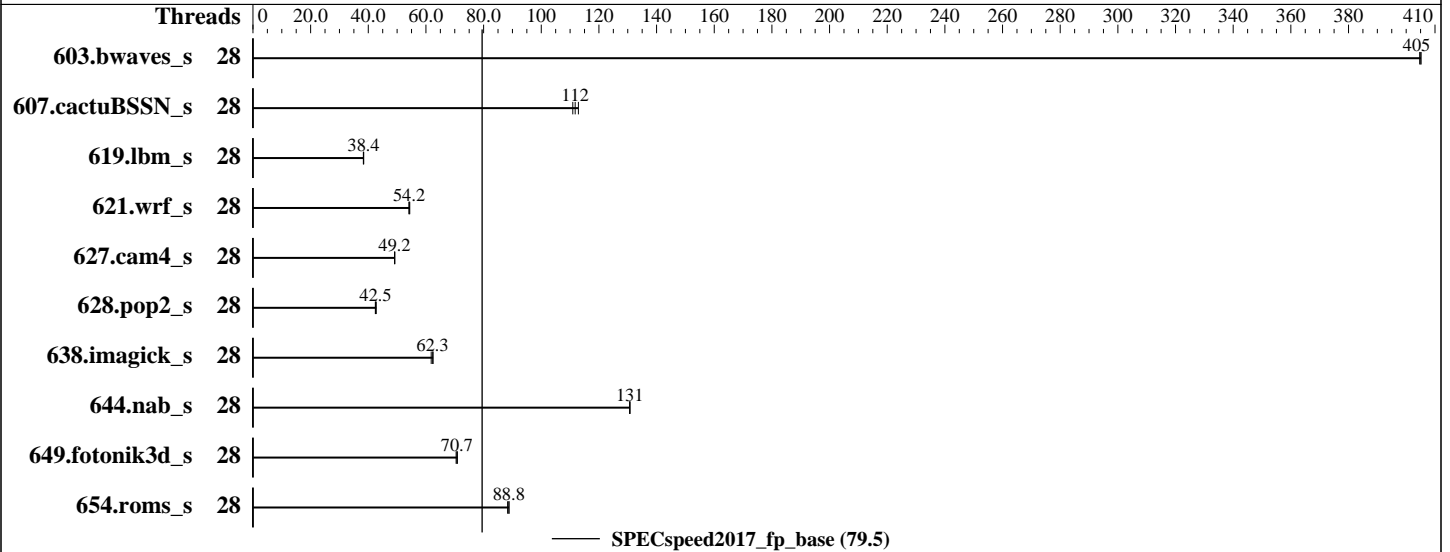

Hardware

CPU Name: Intel Xeon Gold 5117
 Max MHz.: 2800
 Nominal: 2000
 Enabled: 28 cores, 2 chips
 Orderable: 1, 2 chip(s)
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 19.25 MB I+D on chip per chip
 Other: None
 Memory: 192 GB (24 x 8 GB 2Rx8 PC4-2666V-R, running at 2400)
 Storage: 1 x 400 GB SATA SSD, RAID 0
 Other: None

Software

OS: Red Hat Enterprise Linux Server release 7.4 (Maipo)
 Kernel 3.10.0-693.20.1.el7.x86_64
 Compiler: C/C++: Version 18.0.2.199 of Intel C/C++ Compiler for Linux;
 Fortran: Version 18.0.2.199 of Intel Fortran Compiler for Linux
 Parallel: Yes
 Firmware: HPE BIOS Version U30 08/31/2018 released Aug-2018
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc memory allocator V5.0.1



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.00 GHz, Intel Xeon Gold 5117)

SPECspeed2017_fp_base = 79.5

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Sep-2018
Hardware Availability: Aug-2018
Software Availability: Mar-2018

Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	28	146	405	146	405	146	405							
607.cactuBSSN_s	28	148	113	150	111	149	112							
619.lbm_s	28	137	38.4	136	38.4	137	38.3							
621.wrf_s	28	244	54.1	243	54.4	244	54.2							
627.cam4_s	28	180	49.1	180	49.2	180	49.2							
628.pop2_s	28	280	42.4	278	42.8	279	42.5							
638.imagick_s	28	231	62.5	231	62.3	233	61.8							
644.nab_s	28	134	131	134	131	134	131							
649.fotonik3d_s	28	129	70.5	129	70.9	129	70.7							
654.roms_s	28	177	88.8	177	88.8	178	88.3							

SPECspeed2017_fp_base = 79.5

SPECspeed2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3 > /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
IRQ balance service was stopped using "systemctl stop irqbalance.service"
Tuned-adm profile was set to Throughput-Performance using "tuned-adm profile throughput-performance"
```

General Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=core,compact"
LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"
OMP_STACKSIZE = "192M"
```

Binaries compiled on a system with 1x Intel Core i7-6700K CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

```
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.00 GHz, Intel Xeon Gold 5117)

SPECspeed2017_fp_base = 79.5

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2018

Hardware Availability: Aug-2018

Software Availability: Mar-2018

General Notes (Continued)

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler GCC 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Configuration:

Hyper-Threading set to Disabled
Thermal Configuration set to Maximum Cooling
LLC Prefetch set to Enabled
LLC Dead Line Allocation set to Disabled
Stale A to S set to Disabled
XPT Prefetch set to Disabled
Memory Patrol Scrubbing set to Disabled
Workload Profile set to General Peak Frequency Compute
Energy/Performance Bias set to Maximum Performance
Workload Profile set to Custom
Uncore Frequency Scaling set to Auto
NUMA Group Size Optimization set to Flat
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on rhel7.4dl380 Tue Sep 25 07:26:04 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 5117 CPU @ 2.00GHz
 2 "physical id"s (chips)
 28 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 14
siblings : 14
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                28
On-line CPU(s) list:   0-27
Thread(s) per core:    1
Core(s) per socket:    14
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.00 GHz, Intel Xeon Gold 5117)

SPECspeed2017_fp_base = 79.5

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Sep-2018
Hardware Availability: Aug-2018
Software Availability: Mar-2018

Platform Notes (Continued)

```

Socket(s):                2
NUMA node(s):             2
Vendor ID:                GenuineIntel
CPU family:               6
Model:                    85
Model name:               Intel(R) Xeon(R) Gold 5117 CPU @ 2.00GHz
Stepping:                 4
CPU MHz:                  2000.000
BogoMIPS:                 4000.00
Virtualization:          VT-x
L1d cache:                32K
L1i cache:                32K
L2 cache:                 1024K
L3 cache:                 19712K
NUMA node0 CPU(s):       0-13
NUMA node1 CPU(s):       14-27

```

```

Flags:                    fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 fma
cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 invpcid_single
intel_pt spec_ctrl ibpb_support tpr_shadow vnmi flexpriority ept vpid fsgsbase
tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq
rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts

```

```

/proc/cpuinfo cache data
cache size : 19712 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

From /proc/meminfo
MemTotal:      197737828 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.4 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VARIANT="Server"
VARIANT_ID="server"
VERSION_ID="7.4"

```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.00 GHz, Intel Xeon Gold 5117)

SPECspeed2017_fp_base = 79.5

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2018

Hardware Availability: Aug-2018

Software Availability: Mar-2018

Platform Notes (Continued)

```
PRETTY_NAME="Red Hat Enterprise Linux Server 7.4 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.4 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.4:ga:server
```

uname -a:

```
Linux rhel7.4dl380 3.10.0-693.20.1.el7.x86_64 #1 SMP Wed Feb 7 16:53:38 EST 2018
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Mitigation: PTI
CVE-2017-5753 (Spectre variant 1): Mitigation: Load fences
CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS (kernel)
```

run-level 3 Sep 21 02:03

SPEC is set to: /home/cpu2017

```
Filesystem Type Size Used Avail Use% Mounted on
/dev/mapper/rhel_rhel7-home xfs 318G 17G 301G 6% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE U30 08/31/2018

Memory:

24x UNKNOWN NOT AVAILABLE 8 GB 2 rank 2666, configured at 2400

(End of data from sysinfo program)

Compiler Version Notes

```
=====  
CC 619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)  
-----
```

icc (ICC) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

```
=====  
FC 607.cactuBSSN_s(base)  
-----
```

icpc (ICC) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

icc (ICC) 18.0.2 20180210

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.00 GHz, Intel Xeon Gold 5117)

SPECspeed2017_fp_base = 79.5

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Sep-2018

Hardware Availability: Aug-2018

Software Availability: Mar-2018

Compiler Version Notes (Continued)

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

ifort (IFORT) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
FC 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)
=====

ifort (IFORT) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====
CC 621.wrf_s(base) 627.cam4_s(base) 628.pop2_s(base)
=====

ifort (IFORT) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

icc (ICC) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64

Base Portability Flags

603.bwaves_s: -DSPEC_LP64

607.cactuBSSN_s: -DSPEC_LP64

619.lbm_s: -DSPEC_LP64

621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian

627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG

628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian

-assume byterecl

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen10

(2.00 GHz, Intel Xeon Gold 5117)

SPECspeed2017_fp_base = 79.5

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 3
Test Sponsor: HPE
Tested by: HPE

Test Date: Sep-2018
Hardware Availability: Aug-2018
Software Availability: Mar-2018

Base Portability Flags (Continued)

638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc

Fortran benchmarks:

-Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp
-nostandard-realloc-lhs -L/usr/local/je5.0.1-64/lib -ljemalloc

Benchmarks using both Fortran and C:

-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs -L/usr/local/je5.0.1-64/lib -ljemalloc

Benchmarks using Fortran, C, and C++:

-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs -L/usr/local/je5.0.1-64/lib -ljemalloc

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2018-09-25 07:26:04-0400.

Report generated on 2018-10-31 19:06:16 by CPU2017 PDF formatter v6067.

Originally published on 2018-10-16.