



SPEC® CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro


SuperWorkstation 5039A-i (X11SRA , Intel Xeon W-2175)

SPECspeed2017_int_base = 9.78

SPECspeed2017_int_peak = 10.1

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Sep-2018
Hardware Availability: Oct-2017
Software Availability: Feb-2018

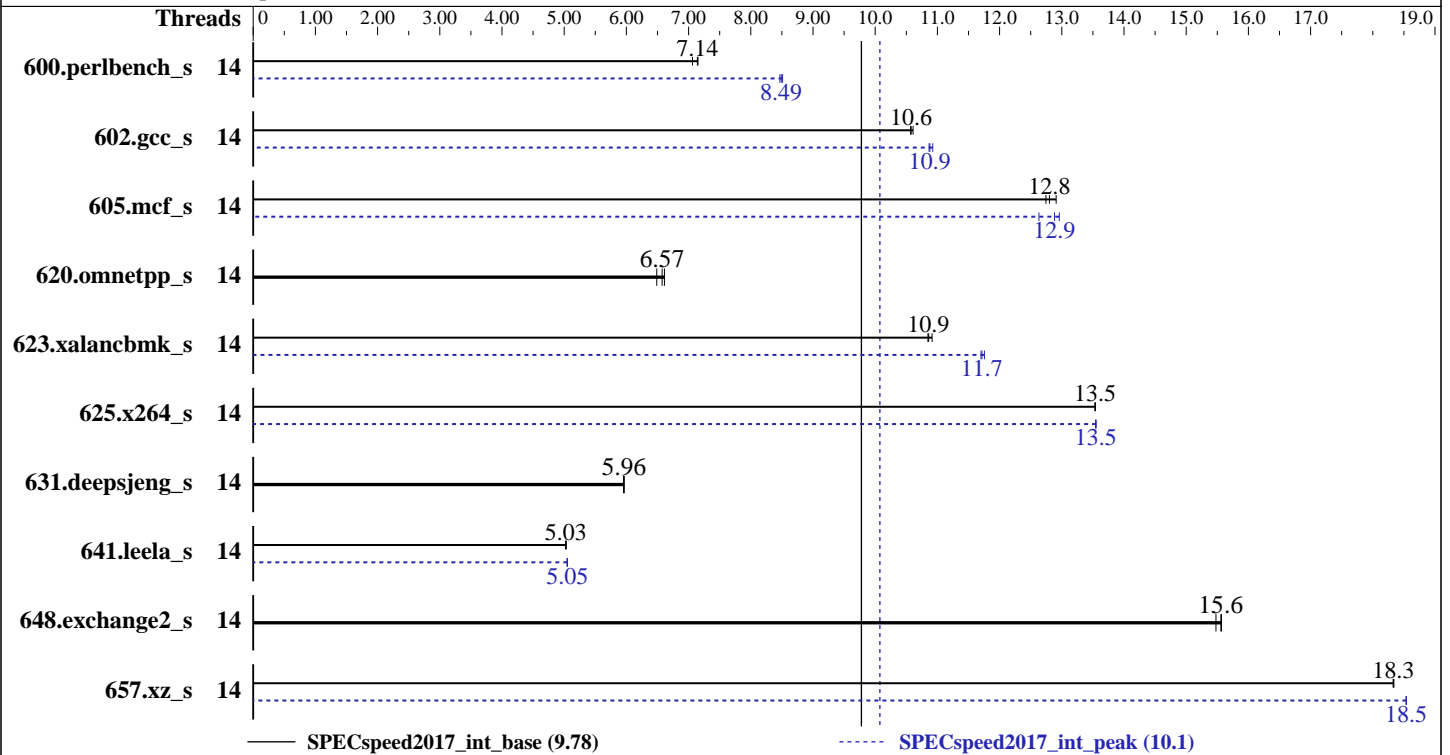

Hardware

CPU Name: Intel Xeon W-2175
Max MHz.: 4300
Nominal: 2500
Enabled: 14 cores, 1 chip
Orderable: 1 chip
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 19.25 MB I+D on chip per chip
Other: None
Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2666V-E)
Storage: 1 x 200 GB SATA III SSD
Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP3 (x86_64)
Kernel 4.4.114-94.11-default
Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;
Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
Parallel: Yes
Firmware: Supermicro BIOS version 1.2 released Aug-2018
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: jemalloc memory allocator library V5.0.1



SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperWorkstation 5039A-i (X11SRA , Intel Xeon W-2175)

SPECspeed2017_int_base = 9.78

SPECspeed2017_int_peak = 10.1

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Sep-2018
Hardware Availability: Oct-2017
Software Availability: Feb-2018

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	14	251	7.06	<u>249</u>	<u>7.14</u>	248	7.15	14	<u>209</u>	<u>8.49</u>	210	8.47	209	8.51
602.gcc_s	14	375	10.6	<u>376</u>	<u>10.6</u>	377	10.6	14	366	10.9	<u>366</u>	<u>10.9</u>	364	10.9
605.mcf_s	14	366	12.9	370	12.7	<u>369</u>	<u>12.8</u>	14	<u>366</u>	<u>12.9</u>	374	12.6	364	13.0
620.omnetpp_s	14	247	6.61	<u>248</u>	<u>6.57</u>	251	6.49	14	247	6.61	<u>248</u>	<u>6.57</u>	251	6.49
623.xalancbmk_s	14	131	10.8	<u>130</u>	<u>10.9</u>	130	10.9	14	121	11.7	121	11.8	<u>121</u>	<u>11.7</u>
625.x264_s	14	130	13.5	<u>130</u>	<u>13.5</u>	130	13.5	14	130	13.5	<u>130</u>	<u>13.5</u>	130	13.6
631.deepsjeng_s	14	241	5.95	<u>240</u>	<u>5.96</u>	240	5.96	14	241	5.95	<u>240</u>	<u>5.96</u>	240	5.96
641.leela_s	14	340	5.02	339	5.03	<u>339</u>	<u>5.03</u>	14	338	5.05	338	5.05	<u>338</u>	<u>5.05</u>
648.exchange2_s	14	190	15.5	189	15.6	<u>189</u>	<u>15.6</u>	14	190	15.5	189	15.6	<u>189</u>	<u>15.6</u>
657.xz_s	14	337	18.3	<u>337</u>	<u>18.3</u>	337	18.3	14	<u>333</u>	<u>18.5</u>	334	18.5	333	18.5

SPECspeed2017_int_base = 9.78

SPECspeed2017_int_peak = 10.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

OMP_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

jemalloc: configured and built at default for 32bit (i686) and 64bit (x86_64) targets;

jemalloc: built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5;

jemalloc: sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.



SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperWorkstation 5039A-i (X11SRA , Intel Xeon W-2175)

SPECspeed2017_int_base = 9.78

SPECspeed2017_int_peak = 10.1

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Sep-2018
Hardware Availability: Oct-2017
Software Availability: Feb-2018

Platform Notes

BIOS Settings:

Hyper-Threading [ALL] = Disable
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on linux-k7zv Mon Sep 10 09:59:13 2018

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) W-2175 CPU @ 2.50GHz
 1 "physical id"s (chips)
 14 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores      : 14
siblings       : 14
physical 0:    cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
```

From lscpu:

```
Architecture:    x86_64
CPU op-mode(s):  32-bit, 64-bit
Byte Order:      Little Endian
CPU(s):          14
On-line CPU(s) list:  0-13
Thread(s) per core:  1
Core(s) per socket:  14
Socket(s):       1
NUMA node(s):    1
Vendor ID:       GenuineIntel
CPU family:      6
Model:           85
Model name:      Intel(R) Xeon(R) W-2175 CPU @ 2.50GHz
Stepping:        4
CPU MHz:         1200.000
CPU max MHz:     2501.0000
CPU min MHz:     1000.0000
BogoMIPS:        4991.90
Virtualization:  VT-x
L1d cache:       32K
L1i cache:       32K
L2 cache:        1024K
L3 cache:        19712K
NUMA node0 CPU(s):  0-13
Flags:            fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
```

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperWorkstation 5039A-i (X11SRA , Intel Xeon W-2175)

SPECspeed2017_int_base = 9.78

SPECspeed2017_int_peak = 10.1

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Sep-2018
Hardware Availability: Oct-2017
Software Availability: Feb-2018

Platform Notes (Continued)

```
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 sse3 sdbg
fma cx16 xtpr pdc_m pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx fl16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
dtherm intel_pt rsb_ctxsw spec_ctrl retpoline kaiser tpr_shadow vnmi flexpriority
ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx
avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512v1 xsaveopt
xsavec xgetbv1 cqm_llc cqm_occup_llc
```

```
/proc/cpuinfo cache data
cache size : 19712 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 1 nodes (0)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13
node 0 size: 64119 MB
node 0 free: 63586 MB
node distances:
node 0
0: 10
```

```
From /proc/meminfo
MemTotal: 65658476 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

From /etc/*release* /etc/*version*

```
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 3
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
```

```
os-release:
NAME="SLES"
VERSION="12-SP3"
VERSION_ID="12.3"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp3"
```

```
uname -a:
Linux linux-k7zv 4.4.114-94.11-default #1 SMP Thu Feb 1 19:28:26 UTC 2018 (4309ff9)
x86_64 x86_64 x86_64 GNU/Linux
```

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperWorkstation 5039A-i (X11SRA , Intel Xeon W-2175)

SPECspeed2017_int_base = 9.78

SPECspeed2017_int_peak = 10.1

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Sep-2018
Hardware Availability: Oct-2017
Software Availability: Feb-2018

Platform Notes (Continued)

run-level 3 Sep 10 09:52

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	145G	13G	132G	9%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 1.2 08/23/2018

Memory:

4x Micron 18ADF2G72AZ-2G6H1R 16 GB 2 rank 2666
4x NO DIMM NO DIMM

(End of data from sysinfo program)

Compiler Version Notes

```
=====
CC 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base) 625.x264_s(base,
   peak) 657.xz_s(base)
-----
```

```
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
CC 600.perlbench_s(peak) 602.gcc_s(peak) 605.mcf_s(peak) 657.xz_s(peak)
-----
```

```
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
CXXC 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base)
     641.leela_s(base)
-----
```

```
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
CXXC 620.omnetpp_s(peak) 623.xalancbmk_s(peak) 631.deepsjeng_s(peak)
     641.leela_s(peak)
-----
```

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperWorkstation 5039A-i (X11SRA , Intel Xeon W-2175)

SPECspeed2017_int_base = 9.78

SPECspeed2017_int_peak = 10.1

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Sep-2018
Hardware Availability: Oct-2017
Software Availability: Feb-2018

Compiler Version Notes (Continued)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

FC 648.exchange2_s(base, peak)

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperWorkstation 5039A-i (X11SRA , Intel Xeon W-2175)

SPECspeed2017_int_base = 9.78

SPECspeed2017_int_peak = 10.1

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Sep-2018
Hardware Availability: Oct-2017
Software Availability: Feb-2018

Base Optimization Flags (Continued)

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

Fortran benchmarks:

```
-m64
```

Peak Compiler Invocation

C benchmarks:

```
icc
```

C++ benchmarks:

```
icpc
```

Fortran benchmarks:

```
ifort
```

Peak Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64  
602.gcc_s: -DSPEC_LP64  
605.mcf_s: -DSPEC_LP64  
620.omnetpp_s: -DSPEC_LP64
```

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperWorkstation 5039A-i (X11SRA , Intel Xeon W-2175)

SPECspeed2017_int_base = 9.78

SPECspeed2017_int_peak = 10.1

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Sep-2018
Hardware Availability: Oct-2017
Software Availability: Feb-2018

Peak Portability Flags (Continued)

623.xalancbmk_s: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

600.perlbench_s: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xCORE-AVX512 -qopt-mem-layout-trans=3 -ipo -O3
-no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -fno-strict-overflow
-L/usr/local/je5.0.1-64/lib -ljemalloc

602.gcc_s: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xCORE-AVX512 -qopt-mem-layout-trans=3 -ipo -O3
-no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -L/usr/local/je5.0.1-64/lib -ljemalloc

605.mcf_s: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc

625.x264_s: -w1,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc

657.xz_s: Same as 602.gcc_s

C++ benchmarks:

620.omnetpp_s: basepeak = yes

623.xalancbmk_s: -L/opt/intel/compilers_and_libraries_2018/linux/lib/ia32
-w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-32/lib -ljemalloc

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Supermicro

SuperWorkstation 5039A-i (X11SRA , Intel Xeon W-2175)

SPECspeed2017_int_base = 9.78

SPECspeed2017_int_peak = 10.1

CPU2017 License: 001176
Test Sponsor: Supermicro
Tested by: Supermicro

Test Date: Sep-2018
Hardware Availability: Oct-2017
Software Availability: Feb-2018

Peak Optimization Flags (Continued)

631.deepsjeng_s: basepeak = yes

```
641.leela_s: -w1, -z, muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3  
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

648.exchange2_s: basepeak = yes

Peak Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks (except as noted below):

```
-m64
```

623.xalancbmk_s: -m32

Fortran benchmarks:

```
-m64
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-BSF-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Supermicro-Platform-Settings-V1.2-BSF-revA.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-09-09 21:59:13-0400.

Report generated on 2018-10-31 19:06:49 by CPU2017 PDF formatter v6067.

Originally published on 2018-10-16.