



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1320 M4, Intel Celeron G4900, 3.10GHz

SPECrate2017_int_base = 8.73

SPECrate2017_int_peak = 9.37

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Nov-2018

Hardware Availability: Nov-2018

Software Availability: Sep-2018

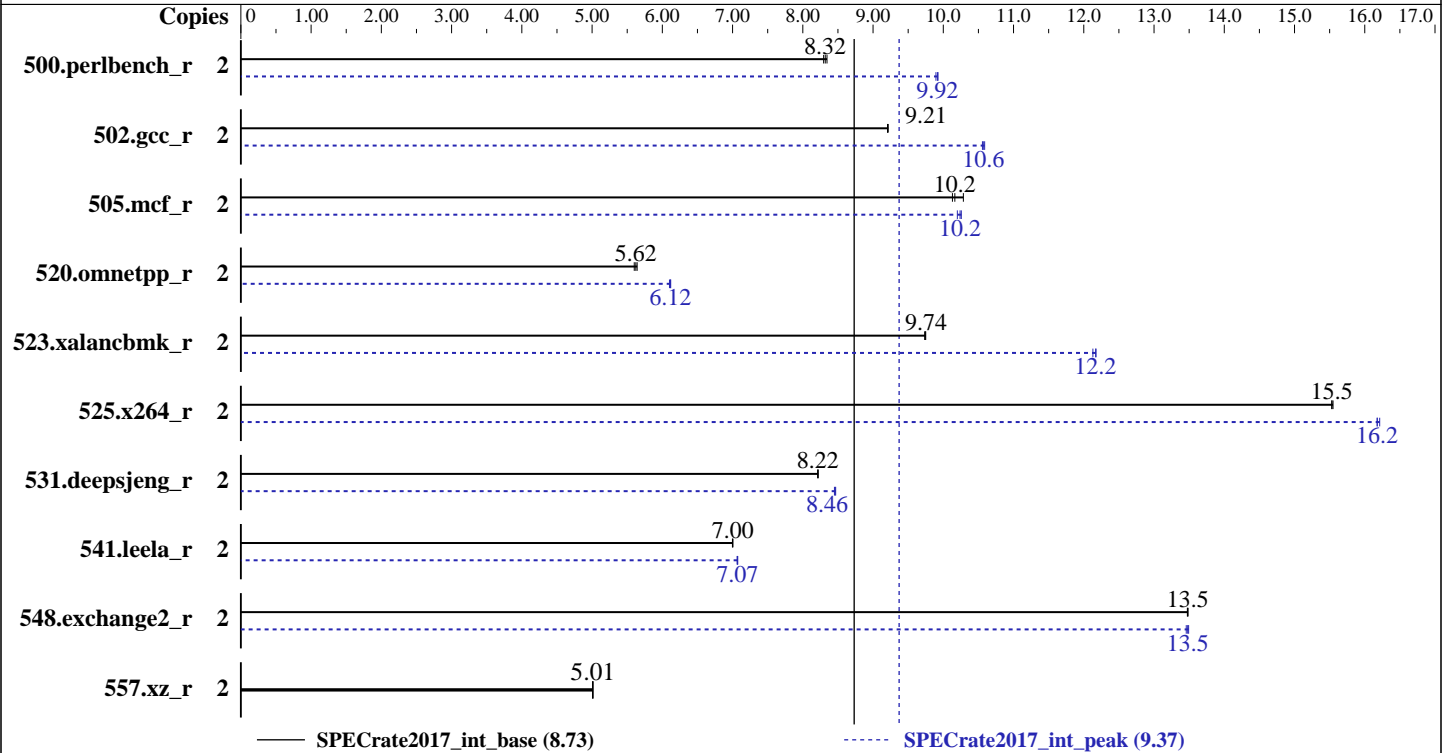

Hardware

CPU Name: Intel Celeron G4900
 Max MHz.: 3100
 Nominal: 3100
 Enabled: 2 cores, 1 chip
 Orderable: 1 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 256 KB I+D on chip per core
 L3: 2 MB I+D on chip per chip
 Other: None
 Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2666V-E, running at 2400)
 Storage: 1 x SATA HDD, 1TB, 7200RPM
 Other: None

Software

OS: SUSE Linux Enterprise Server 15
 4.12.14-23-default
 Compiler: C/C++: Version 19.0.0.117 of Intel C/C++
 Compiler for Linux;
 Fortran: Version 19.0.0.117 of Intel Fortran
 Compiler for Linux
 Parallel: No
 Firmware: Fujitsu BIOS Version V5.0.0.13 R1.4.0 for D3673-A1x. Released Nov-2018 tested as V5.0.0.13 R1.0.0 for D3673-A1x Sep-2018
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator library V5.0.1



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1320 M4, Intel Celeron G4900, 3.10GHz

SPECrate2017_int_base = 8.73

SPECrate2017_int_peak = 9.37

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Nov-2018
Hardware Availability: Nov-2018
Software Availability: Sep-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	2	382	8.34	383	8.32	384	8.30	2	322	9.90	321	9.92	321	9.92
502.gcc_r	2	308	9.21	307	9.22	308	9.21	2	268	10.6	267	10.6	268	10.6
505.mcf_r	2	314	10.3	319	10.1	318	10.2	2	316	10.2	317	10.2	315	10.3
520.omnetpp_r	2	467	5.62	469	5.60	465	5.64	2	429	6.12	430	6.10	429	6.12
523.xalancbmk_r	2	217	9.73	217	9.75	217	9.74	2	173	12.2	174	12.1	174	12.2
525.x264_r	2	225	15.5	225	15.5	226	15.5	2	216	16.2	216	16.2	216	16.2
531.deepsjeng_r	2	279	8.22	279	8.21	279	8.22	2	271	8.47	271	8.46	271	8.45
541.leela_r	2	473	7.00	473	7.00	473	7.00	2	468	7.07	469	7.06	468	7.07
548.exchange2_r	2	389	13.5	389	13.5	389	13.5	2	388	13.5	389	13.5	389	13.5
557.xz_r	2	431	5.01	431	5.01	431	5.01	2	431	5.01	431	5.01	431	5.01

SPECrate2017_int_base = 8.73

SPECrate2017_int_peak = 9.37

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/Benchmark/speccpu2017-ic19-20181011/icc19-lib/ia32"
LD_LIBRARY_PATH = "\$LD_LIBRARY_PATH:/home/Benchmark/speccpu2017-ic19-20181011/icc19-lib/intel64"
LD_LIBRARY_PATH = "\$LD_LIBRARY_PATH:/home/Benchmark/speccpu2017-ic19-20181011/je5.0.1-32"
LD_LIBRARY_PATH = "\$LD_LIBRARY_PATH:/home/Benchmark/speccpu2017-ic19-20181011/je5.0.1-64"

Binaries compiled on a system with 2x Intel Xeon E5-2667 v2 CPU + 64GB RAM
memory using SUSE Linux Enterprise Server 12 SP2
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3 > /proc/sys/vm/drop_caches
jemalloc: configured and built at default for 32bit (i686) and 64bit (x86_64) targets
jemalloc: built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5
jemalloc: sources available via jemalloc.net

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1320 M4, Intel Celeron G4900,
3.10GHz

SPECrate2017_int_base = 8.73

SPECrate2017_int_peak = 9.37

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Nov-2018
Hardware Availability: Nov-2018
Software Availability: Sep-2018

General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Fan Control = Full

Sysinfo program /home/Benchmark/speccpu2017-1.0.2/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on TX1330M4 Fri Nov 9 14:30:48 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Celeron(R) G4900 CPU @ 3.10GHz

1 "physical id"s (chips)

2 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 2

siblings : 2

physical 0: cores 0 1

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 2

On-line CPU(s) list: 0,1

Thread(s) per core: 1

Core(s) per socket: 2

Socket(s): 1

NUMA node(s): 1

Vendor ID: GenuineIntel

CPU family: 6

Model: 158

Model name: Intel(R) Celeron(R) G4900 CPU @ 3.10GHz

Stepping: 11

CPU MHz: 3100.000

CPU max MHz: 3100.0000

CPU min MHz: 800.0000

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1320 M4, Intel Celeron G4900,
3.10GHz

SPECrate2017_int_base = 8.73

SPECrate2017_int_peak = 9.37

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Nov-2018

Hardware Availability: Nov-2018

Software Availability: Sep-2018

Platform Notes (Continued)

```

BogoMIPS:          6192.00
Virtualization:    VT-x
L1d cache:         32K
L1i cache:         32K
L2 cache:          256K
L3 cache:          2048K
NUMA node0 CPU(s): 0,1
Flags:             fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx est tm2 ssse3 sdbg
cx16 xtptr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb invpcid_single pti tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust smep erms invpcid mpx rdseed smap
clflushopt intel_pt xsaveopt xsavec xgetbv1 xsaves ibpb ibrs stibp dtherm arat pln
pts hwp hwp_notify hwp_act_window hwp_epp ssbd

```

```

/proc/cpuinfo cache data
cache size : 2048 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 1 nodes (0)
node 0 cpus: 0 1
node 0 size: 63917 MB
node 0 free: 63435 MB
node distances:
node 0
0: 10

```

```

From /proc/meminfo
MemTotal:          65451300 kB
HugePages_Total:   0
Hugepagesize:      2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15"
VERSION_ID="15"
PRETTY_NAME="SUSE Linux Enterprise Server 15"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15"

```

uname -a:

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1320 M4, Intel Celeron G4900, 3.10GHz

SPECrate2017_int_base = 8.73

SPECrate2017_int_peak = 9.37

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Nov-2018
Hardware Availability: Nov-2018
Software Availability: Sep-2018

Platform Notes (Continued)

Linux TX1330M4 4.12.14-23-default #1 SMP Tue May 29 21:04:44 UTC 2018 (cd0437b) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Nov 9 14:05

SPEC is set to: /home/Benchmark/speccpu2017-1.0.2
Filesystem Type Size Used Avail Use% Mounted on
/dev/sda3 xfs 828G 111G 718G 14% /home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS FUJITSU // American Megatrends Inc. V5.0.0.13 R1.0.0 for D3673-A1x
09/14/2018

Memory:
4x SK Hynix HMA82GU6CJR8N-VK 16 GB 2 rank 2667, configured at 2400

(End of data from sysinfo program)

Compiler Version Notes

```
=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
   525.x264_r(base, peak) 557.xz_r(base, peak)
-----

icc (ICC) 19.0.0.117 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----

CC 500.perlbench_r(peak) 502.gcc_r(peak)
-----

icc (ICC) 19.0.0.117 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----

CXXC 520.omnetpp_r(base) 523.xalanbmk_r(base) 531.deepsjeng_r(base)
     541.leela_r(base)
-----

icpc (ICC) 19.0.0.117 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
=====
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1320 M4, Intel Celeron G4900,
3.10GHz

SPECrate2017_int_base = 8.73

SPECrate2017_int_peak = 9.37

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Nov-2018
Hardware Availability: Nov-2018
Software Availability: Sep-2018

Compiler Version Notes (Continued)

CXXC 520.omnetpp_r(peak) 523.xalancbmk_r(peak) 531.deepsjeng_r(peak)
541.leela_r(peak)

icpc (ICC) 19.0.0.117 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

FC 548.exchange2_r(base, peak)

ifort (IFORT) 19.0.0.117 20180804
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icc -m64 -std=c11

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502 gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1320 M4, Intel Celeron G4900,
3.10GHz

SPECrate2017_int_base = 8.73

SPECrate2017_int_peak = 9.37

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Nov-2018

Hardware Availability: Nov-2018

Software Availability: Sep-2018

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64 -std=c11
```

```
502.gcc_r: icc -m32 -std=c11 -L/opt/intel/compilers_and_libraries/linux/lib/ia32
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
523.xalancbmk_r: icpc -m32 -L/opt/intel/compilers_and_libraries/linux/lib/ia32
```

Fortran benchmarks:

```
ifort -m64
```

Peak Portability Flags

```
500.perlbenc_r: -DSPEC_LP64 -DSPEC_LINUX_X64
```

```
502.gcc_r: -D_FILE_OFFSET_BITS=64
```

```
505.mcf_r: -DSPEC_LP64
```

```
520.omnetpp_r: -DSPEC_LP64
```

```
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
```

```
525.x264_r: -DSPEC_LP64
```

```
531.deepsjeng_r: -DSPEC_LP64
```

```
541.leela_r: -DSPEC_LP64
```

```
548.exchange2_r: -DSPEC_LP64
```

```
557.xz_r: -DSPEC_LP64
```



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1320 M4, Intel Celeron G4900,
3.10GHz

SPECrate2017_int_base = 8.73

SPECrate2017_int_peak = 9.37

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Nov-2018

Hardware Availability: Nov-2018

Software Availability: Sep-2018

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xSSE4.2 -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3 -fno-strict-overflow  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
502.gcc_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xSSE4.2 -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-32/lib  
-ljemalloc
```

```
505.mcf_r: -Wl,-z,muldefs -xSSE4.2 -ipo -O3 -no-prec-div  
-qopt-prefetch -qopt-mem-layout-trans=3  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
525.x264_r: -Wl,-z,muldefs -xSSE4.2 -ipo -O3 -no-prec-div  
-qopt-prefetch -qopt-mem-layout-trans=3 -fno-alias  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
557.xz_r: basepeak = yes
```

C++ benchmarks:

```
520.omnetpp_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xSSE4.2 -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib  
-ljemalloc
```

```
523.xalancbmk_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xSSE4.2 -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-32/lib  
-ljemalloc
```

```
531.deepsjeng_r: Same as 520.omnetpp_r
```

```
541.leela_r: Same as 520.omnetpp_r
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```




SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1320 M4, Intel Celeron G4900,
3.10GHz

SPECrate2017_int_base = 8.73

SPECrate2017_int_peak = 9.37

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Nov-2018

Hardware Availability: Nov-2018

Software Availability: Sep-2018

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0.2-CFL-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0.2-CFL-RevA.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-11-09 00:30:47-0500.

Report generated on 2018-11-27 13:39:27 by CPU2017 PDF formatter v6067.

Originally published on 2018-11-27.