



# SPEC® CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY TX1330 M4, Intel Core i3-8100, 3.60GHz

SPECspeed2017\_fp\_base = 23.2

SPECspeed2017\_fp\_peak = Not Run

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Nov-2018

Hardware Availability: Nov-2018

Software Availability: Sep-2018

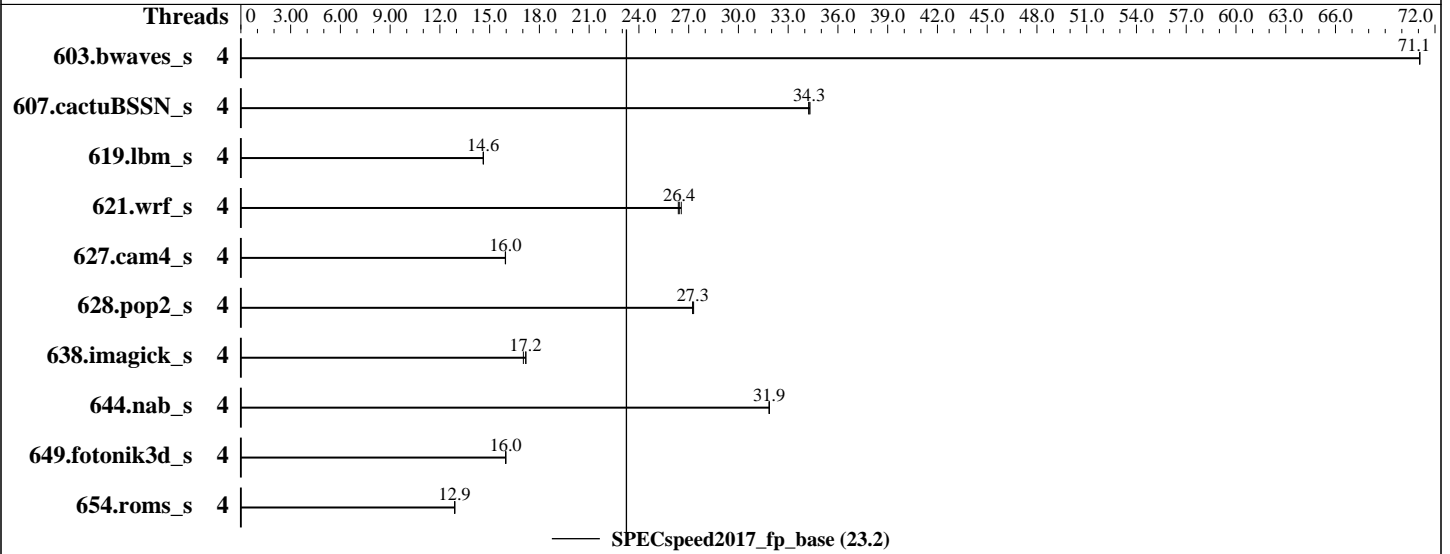

### Hardware

CPU Name: Intel Core i3-8100  
 Max MHz.: 3600  
 Nominal: 3600  
 Enabled: 4 cores, 1 chip  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 256 KB I+D on chip per core  
 L3: 6 MB I+D on chip per chip  
 Other: None  
 Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2666V-E, running at 2400)  
 Storage: 1 x SATA M.2 SSD, 240 GB  
 Other: None

### Software

OS: Red Hat Enterprise Linux Server release 7.5 (Maipo)  
 3.10.0-862.el7.x86\_64  
 Compiler: C/C++: Version 19.0.0.117 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 19.0.0.117 of Intel Fortran Compiler for Linux  
 Parallel: Yes  
 Firmware: Fujitsu BIOS Version V5.0.0.13 R1.4.0 for D3673-A1x. Released Nov-2018 tested as V5.0.0.13 R1.0.0 for D3673-A1x Sep-2018  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY TX1330 M4, Intel Core i3-8100, 3.60GHz

SPECspeed2017\_fp\_base = 23.2

SPECspeed2017\_fp\_peak = Not Run

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Nov-2018  
Hardware Availability: Nov-2018  
Software Availability: Sep-2018

## Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	4	830	71.1	<b>830</b>	<b>71.1</b>	830	71.1							
607.cactuBSSN_s	4	487	34.2	<b>487</b>	<b>34.3</b>	486	34.3							
619.lbm_s	4	358	14.6	358	14.6	<b>358</b>	<b>14.6</b>							
621.wrf_s	4	501	26.4	498	26.6	<b>500</b>	<b>26.4</b>							
627.cam4_s	4	<b>556</b>	<b>16.0</b>	555	16.0	556	15.9							
628.pop2_s	4	435	27.3	436	27.2	<b>436</b>	<b>27.3</b>							
638.imagick_s	4	847	17.0	<b>840</b>	<b>17.2</b>	839	17.2							
644.nab_s	4	548	31.9	548	31.9	<b>548</b>	<b>31.9</b>							
649.fotonik3d_s	4	571	16.0	571	16.0	<b>571</b>	<b>16.0</b>							
654.roms_s	4	<b>1221</b>	<b>12.9</b>	1221	12.9	1222	12.9							

SPECspeed2017\_fp\_base = 23.2

SPECspeed2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,compact"  
OMP\_STACKSIZE = "192M"  
LD\_LIBRARY\_PATH = "/home/Benchmark/speccpu2017-ic19/ic19.0-lib/intel64"

Binaries compiled on a system with 1x Intel Xeon E-2186G CPU + 64GB RAM memory using Red Hat Enterprise Linux Server release 7.5  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3 > /proc/sys/vm/drop\_caches

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY TX1330 M4, Intel Core i3-8100, 3.60GHz

SPECspeed2017\_fp\_base = 23.2

SPECspeed2017\_fp\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Nov-2018  
**Hardware Availability:** Nov-2018  
**Software Availability:** Sep-2018

### General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

### Platform Notes

Sysinfo program /home/Benchmark/speccpu2017-ic19/bin/sysinfo  
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on localhost.localdomain Wed Nov 7 16:51:27 2018

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Core(TM) i3-8100 CPU @ 3.60GHz  
1 "physical id"s (chips)  
4 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 4  
siblings : 4  
physical 0: cores 0 1 2 3

From lscpu:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 4  
On-line CPU(s) list: 0-3  
Thread(s) per core: 1  
Core(s) per socket: 4  
Socket(s): 1  
NUMA node(s): 1  
Vendor ID: GenuineIntel  
CPU family: 6  
Model: 158  
Model name: Intel(R) Core(TM) i3-8100 CPU @ 3.60GHz  
Stepping: 11  
CPU MHz: 3600.000  
CPU max MHz: 3600.0000  
CPU min MHz: 800.0000  
BogoMIPS: 7200.00  
Virtualization: VT-x  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 256K

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY TX1330 M4, Intel Core i3-8100,  
3.60GHz

SPECspeed2017\_fp\_base = 23.2

SPECspeed2017\_fp\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Nov-2018  
**Hardware Availability:** Nov-2018  
**Software Availability:** Sep-2018

### Platform Notes (Continued)

```
L3 cache:                6144K
NUMA node0 CPU(s):      0-3
Flags:                   fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx est tm2 ssse3 sdbg fma
cx16 xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch epb intel_pt tpr_shadow vnmi flexpriority
ept vpid fsgsbase tsc_adjust bmil avx2 smep bmi2 erms invpcid mpx rdseed adx smap
clflushopt xsaveopt xsavec xgetbv1 ibpb ibrs stibp dtherm arat pln pts hwp
hwp_notify hwp_act_window hwp_epp spec_ctrl intel_stibp
```

```
/proc/cpuinfo cache data
cache size : 6144 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 1 nodes (0)
node 0 cpus: 0 1 2 3
node 0 size: 65277 MB
node 0 free: 63212 MB
node distances:
node    0
  0:    10
```

From /proc/meminfo

```
MemTotal:        65545088 kB
HugePages_Total: 0
Hugepagesize:    2048 kB
```

From /etc/\*release\* /etc/\*version\*

```
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.5 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VARIANT="Server"
VARIANT_ID="server"
VERSION_ID="7.5"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.5 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.5 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.5 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.5:ga:server
```

uname -a:

```
Linux localhost.localdomain 3.10.0-862.el7.x86_64 #1 SMP Wed Mar 21 18:14:51 EDT 2018
x86_64 x86_64 x86_64 GNU/Linux
```

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY TX1330 M4, Intel Core i3-8100, 3.60GHz

SPECspeed2017\_fp\_base = 23.2

SPECspeed2017\_fp\_peak = Not Run

CPU2017 License: 19  
Test Sponsor: Fujitsu  
Tested by: Fujitsu

Test Date: Nov-2018  
Hardware Availability: Nov-2018  
Software Availability: Sep-2018

### Platform Notes (Continued)

run-level 3 Nov 7 16:49

SPEC is set to: /home/Benchmark/speccpu2017-ic19

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	150G	59G	92G	40%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS FUJITSU // American Megatrends Inc. V5.0.0.13 R1.0.0 for D3673-A1x  
09/14/2018

Memory:

4x SK Hynix HMA82GU7CJR8N-VK 16 GB 2 rank 2667, configured at 2400

(End of data from sysinfo program)

### Compiler Version Notes

=====  
CC 619.lbm\_s(base) 638.imagick\_s(base) 644.nab\_s(base)  
-----

icc (ICC) 19.0.0.117 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
FC 607.cactuBSSN\_s(base)  
-----

icpc (ICC) 19.0.0.117 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
icc (ICC) 19.0.0.117 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
ifort (IFORT) 19.0.0.117 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
FC 603.bwaves\_s(base) 649.fotonik3d\_s(base) 654.roms\_s(base)  
-----

ifort (IFORT) 19.0.0.117 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----  
=====

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY TX1330 M4, Intel Core i3-8100,  
3.60GHz

SPECspeed2017\_fp\_base = 23.2

SPECspeed2017\_fp\_peak = Not Run

**CPU2017 License:** 19  
**Test Sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test Date:** Nov-2018  
**Hardware Availability:** Nov-2018  
**Software Availability:** Sep-2018

## Compiler Version Notes (Continued)

CC 621.wrf\_s(base) 627.cam4\_s(base) 628.pop2\_s(base)

-----  
ifort (IFORT) 19.0.0.117 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
icc (ICC) 19.0.0.117 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactuBSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
627.cam4\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
628.pop2\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
-assume byterecl  
638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64  
649.fotonik3d\_s: -DSPEC\_LP64  
654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -qopenmp -DSPEC\_OPENMP

(Continued on next page)



# SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY TX1330 M4, Intel Core i3-8100,  
3.60GHz

SPECspeed2017\_fp\_base = 23.2

SPECspeed2017\_fp\_peak = Not Run

**CPU2017 License:** 19

**Test Sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test Date:** Nov-2018

**Hardware Availability:** Nov-2018

**Software Availability:** Sep-2018

## Base Optimization Flags (Continued)

Fortran benchmarks:

```
-DSPEC_OPENMP -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp  
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP  
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP  
-nostandard-realloc-lhs -align array32byte
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0.2-CFL-RevB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0.2-CFL-RevB.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-11-07 02:51:26-0500.

Report generated on 2018-11-27 13:40:32 by CPU2017 PDF formatter v6067.

Originally published on 2018-11-27.