



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650  
(2.50 GHz, Intel Xeon Platinum 8180)

SPECrate2017\_fp\_base = 263

SPECrate2017\_fp\_peak = 267

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2018

Hardware Availability: Aug-2017

Software Availability: May-2018

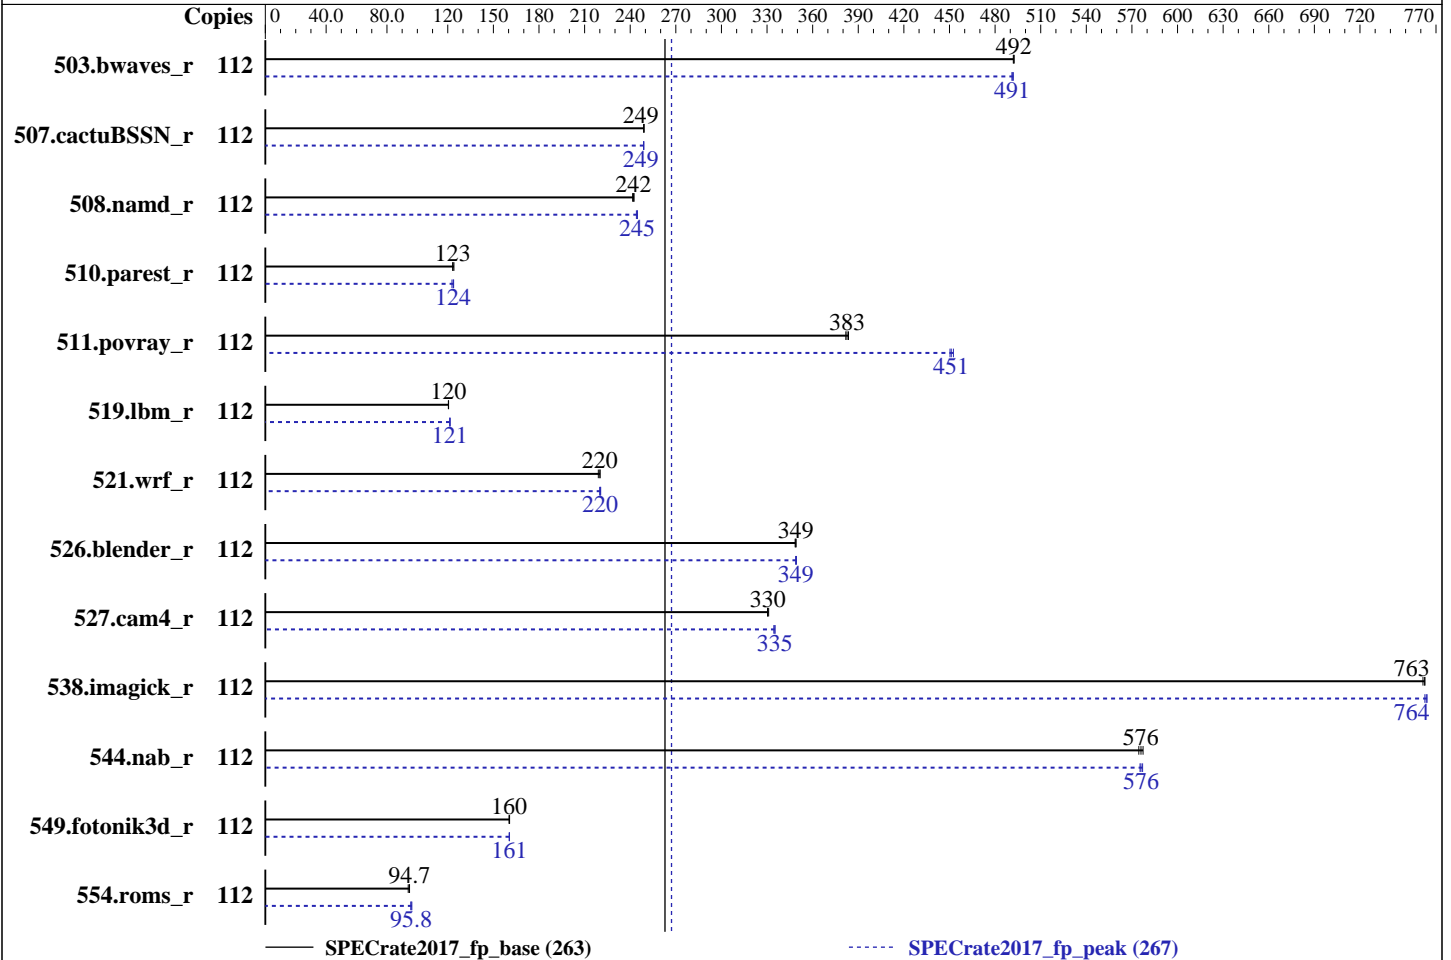

### Hardware

CPU Name: Intel Xeon Platinum 8180  
 Max MHz.: 3800  
 Nominal: 2500  
 Enabled: 56 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 38.5 MB I+D on chip per chip  
 Other: None  
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2666V-R)  
 Storage: 1 x 800 GB SAS SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP3 (x86\_64)  
 Kernel 4.4.131-94.29-default  
 Compiler: C/C++: Version 18.0.2.199 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 18.0.2.199 of Intel Fortran Compiler for Linux  
 Parallel: No  
 Firmware: Lenovo BIOS Version IVE121D 1.30 released Jun-2018  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650  
(2.50 GHz, Intel Xeon Platinum 8180)

SPECrate2017\_fp\_base = 263

SPECrate2017\_fp\_peak = 267

CPU2017 License: 9017  
Test Sponsor: Lenovo Global Technology  
Tested by: Lenovo Global Technology

Test Date: Nov-2018  
Hardware Availability: Aug-2017  
Software Availability: May-2018

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	112	2281	492	<b><u>2281</u></b>	<b><u>492</u></b>	2283	492	112	<b><u>2286</u></b>	<b><u>491</u></b>	2283	492	2287	491
507.cactuBSSN_r	112	569	249	<b><u>569</u></b>	<b><u>249</u></b>	570	249	112	<b><u>570</u></b>	<b><u>249</u></b>	570	249	570	249
508.namd_r	112	<b><u>439</u></b>	<b><u>242</u></b>	440	242	439	243	112	<b><u>435</u></b>	<b><u>245</u></b>	435	245	436	244
510.parest_r	112	2362	124	<b><u>2374</u></b>	<b><u>123</u></b>	2377	123	112	2366	124	<b><u>2371</u></b>	<b><u>124</u></b>	2387	123
511.povray_r	112	<b><u>683</u></b>	<b><u>383</u></b>	685	382	682	384	112	581	450	<b><u>580</u></b>	<b><u>451</u></b>	578	453
519.lbm_r	112	<b><u>980</u></b>	<b><u>120</u></b>	979	121	980	120	112	972	121	973	121	<b><u>972</u></b>	<b><u>121</u></b>
521.wrf_r	112	1140	220	<b><u>1140</u></b>	<b><u>220</u></b>	1145	219	112	1141	220	1137	221	<b><u>1139</u></b>	<b><u>220</u></b>
526.blender_r	112	489	349	<b><u>489</u></b>	<b><u>349</u></b>	489	348	112	488	349	<b><u>489</u></b>	<b><u>349</u></b>	489	349
527.cam4_r	112	592	331	593	330	<b><u>593</u></b>	<b><u>330</u></b>	112	584	335	586	334	<b><u>584</u></b>	<b><u>335</u></b>
538.imagick_r	112	<b><u>365</u></b>	<b><u>763</u></b>	366	761	365	763	112	365	763	365	764	<b><u>365</u></b>	<b><u>764</u></b>
544.nab_r	112	327	577	<b><u>327</u></b>	<b><u>576</u></b>	328	575	112	328	575	<b><u>327</u></b>	<b><u>576</u></b>	327	577
549.fotonik3d_r	112	2717	161	<b><u>2720</u></b>	<b><u>160</u></b>	2722	160	112	<b><u>2718</u></b>	<b><u>161</u></b>	2721	160	2718	161
554.roms_r	112	<b><u>1879</u></b>	<b><u>94.7</u></b>	1894	94.0	1876	94.9	112	1847	96.4	<b><u>1857</u></b>	<b><u>95.8</u></b>	1859	95.7

SPECrate2017\_fp\_base = 263

SPECrate2017\_fp\_peak = 267

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017-1.0.5-ic18.0u2/lib/ia32:/home/cpu2017-1.0.5-ic18.0u2/lib/intel64"  
LD\_LIBRARY\_PATH = "\$LD\_LIBRARY\_PATH:/home/cpu2017-1.0.5-ic18.0u2/je5.0.1-32:/home/cpu2017-1.0.5-ic18.0u2/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-6700K CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.5  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation

Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECrate2017\_fp\_base = 263

ThinkSystem SR650  
(2.50 GHz, Intel Xeon Platinum 8180)

SPECrate2017\_fp\_peak = 267

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Nov-2018  
**Hardware Availability:** Aug-2017  
**Software Availability:** May-2018

## General Notes (Continued)

is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:  
Choose Operating Mode set to Maximum Performance  
Choose Operating Mode set to Custom Mode  
C-states set to Legacy  
SNC set to Enable  
DCU Streamer Prefetcher set to Disable  
Execute Disable Bit set to Disable  
Trusted Execution Technology set to Enable  
Stale AtoS set to Enable  
LLC dead line alloc set to Disable  
Patrol Scrub set to Disable  
Sysinfo program /home/cpu2017-1.0.5-ic18.0u2/bin/sysinfo  
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9  
running on linux-tr9i Sun Nov 25 20:20:57 2018

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8180 CPU @ 2.50GHz
 2 "physical id"s (chips)
112 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 28
siblings : 56
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
```

```
From lscpu:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 112
On-line CPU(s) list:   0-111
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate2017\_fp\_base = 263

ThinkSystem SR650  
(2.50 GHz, Intel Xeon Platinum 8180)

SPECrate2017\_fp\_peak = 267

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Nov-2018  
**Hardware Availability:** Aug-2017  
**Software Availability:** May-2018

### Platform Notes (Continued)

```

Thread(s) per core:      2
Core(s) per socket:     28
Socket(s):               2
NUMA node(s):           4
Vendor ID:               GenuineIntel
CPU family:              6
Model:                   85
Model name:              Intel(R) Xeon(R) Platinum 8180 CPU @ 2.50GHz
Stepping:                4
CPU MHz:                 2494.142
BogoMIPS:                4988.28
Virtualization:         VT-x
L1d cache:               32K
L1i cache:               32K
L2 cache:                1024K
L3 cache:                39424K
NUMA node0 CPU(s):      0-3,7-9,14-17,21-23,56-59,63-65,70-73,77-79
NUMA node1 CPU(s):      4-6,10-13,18-20,24-27,60-62,66-69,74-76,80-83
NUMA node2 CPU(s):      28-31,35-37,42-45,49-51,84-87,91-93,98-101,105-107
NUMA node3 CPU(s):      32-34,38-41,46-48,52-55,88-90,94-97,102-104,108-111
Flags:                   fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
dtherm intel_pt rsb_ctxsw spec_ctrl stibp ssbd retpoline kaiser tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc pku ospke

```

```

/proc/cpuinfo cache data
cache size : 39424 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 7 8 9 14 15 16 17 21 22 23 56 57 58 59 63 64 65 70 71 72 73 77 78
79
node 0 size: 193126 MB
node 0 free: 192524 MB
node 1 cpus: 4 5 6 10 11 12 13 18 19 20 24 25 26 27 60 61 62 66 67 68 69 74 75 76 80 81
82 83
node 1 size: 193523 MB
node 1 free: 193176 MB
node 2 cpus: 28 29 30 31 35 36 37 42 43 44 45 49 50 51 84 85 86 87 91 92 93 98 99 100
101 105 106 107

```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650  
(2.50 GHz, Intel Xeon Platinum 8180)

SPECrate2017\_fp\_base = 263

SPECrate2017\_fp\_peak = 267

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Nov-2018  
**Hardware Availability:** Aug-2017  
**Software Availability:** May-2018

### Platform Notes (Continued)

```

node 2 size: 193523 MB
node 2 free: 193217 MB
node 3 cpus: 32 33 34 38 39 40 41 46 47 48 52 53 54 55 88 89 90 94 95 96 97 102 103 104
108 109 110 111
node 3 size: 193521 MB
node 3 free: 193218 MB
node distances:
node 0 1 2 3
  0: 10 11 21 21
  1: 11 10 21 21
  2: 21 21 10 11
  3: 21 21 11 10

From /proc/meminfo
MemTotal:          792263252 kB
HugePages_Total:    0
Hugepagesize:      2048 kB

From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 3
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP3"
VERSION_ID="12.3"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp3"

uname -a:
Linux linux-tr9i 4.4.131-94.29-default #1 SMP Mon May 21 14:41:34 UTC 2018 (f49bc78)
x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown):          Mitigation: PTI
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS+IBPB

run-level 3 Nov 25 20:18

SPEC is set to: /home/cpu2017-1.0.5-ic18.0u2

```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SR650  
(2.50 GHz, Intel Xeon Platinum 8180)

SPECrate2017\_fp\_base = 263

SPECrate2017\_fp\_peak = 267

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Nov-2018  
**Hardware Availability:** Aug-2017  
**Software Availability:** May-2018

### Platform Notes (Continued)

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	405G	4.0G	401G	1%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Lenovo -[IVE121D-1.30]- 06/15/2018  
Memory:  
24x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666

(End of data from sysinfo program)

### Compiler Version Notes

```

=====
CC 519.lbm_r(base) 538.imagick_r(base, peak) 544.nab_r(base, peak)
-----

icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----

=====
CC 519.lbm_r(peak)
-----

icc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----

=====
CXXC 508.namd_r(base) 510.parest_r(base, peak)
-----

icpc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----

=====
CXXC 508.namd_r(peak)
-----

icpc (ICC) 18.0.2 20180210
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----

=====
CC 511.povray_r(base) 526.blender_r(base, peak)
-----

```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate2017\_fp\_base = 263

ThinkSystem SR650  
(2.50 GHz, Intel Xeon Platinum 8180)

SPECrate2017\_fp\_peak = 267

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Nov-2018  
**Hardware Availability:** Aug-2017  
**Software Availability:** May-2018

### Compiler Version Notes (Continued)

icpc (ICC) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====  
CC 511.povray\_r(peak)  
-----

icpc (ICC) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====  
FC 507.cactuBSSN\_r(base, peak)  
-----

icpc (ICC) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
ifort (IFORT) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====  
FC 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base)  
-----

ifort (IFORT) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====  
FC 554.roms\_r(peak)  
-----

ifort (IFORT) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====  
CC 521.wrf\_r(base) 527.cam4\_r(base)  
-----

ifort (IFORT) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.2 20180210  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR650  
(2.50 GHz, Intel Xeon Platinum 8180)

SPECrate2017\_fp\_base = 263

SPECrate2017\_fp\_peak = 267

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2018

Hardware Availability: Aug-2017

Software Availability: May-2018

## Compiler Version Notes (Continued)

-----  
=====  
CC 521.wrf\_r(peak) 527.cam4\_r(peak)  
-----

ifort (IFORT) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

icc (ICC) 18.0.2 20180210

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using both C and C++:

icpc -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64

507.cactuBSSN\_r: -DSPEC\_LP64

508.namd\_r: -DSPEC\_LP64

510.parest\_r: -DSPEC\_LP64

511.povray\_r: -DSPEC\_LP64

519.lbm\_r: -DSPEC\_LP64

521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian

526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char

527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG

538.imagick\_r: -DSPEC\_LP64

(Continued on next page)





# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

ThinkSystem SR650  
(2.50 GHz, Intel Xeon Platinum 8180)

SPECrate2017\_fp\_base = 263

SPECrate2017\_fp\_peak = 267

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2018

Hardware Availability: Aug-2017

Software Availability: May-2018

## Base Portability Flags (Continued)

544.nab\_r: -DSPEC\_LP64

549.fotonik3d\_r: -DSPEC\_LP64

554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs

Benchmarks using both C and C++:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs

## Peak Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017\_fp\_base = 263

ThinkSystem SR650  
(2.50 GHz, Intel Xeon Platinum 8180)

SPECrate2017\_fp\_peak = 267

CPU2017 License: 9017

Test Date: Nov-2018

Test Sponsor: Lenovo Global Technology

Hardware Availability: Aug-2017

Tested by: Lenovo Global Technology

Software Availability: May-2018

## Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

```
538.imagick_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3
```

```
544.nab_r: Same as 538.imagick_r
```

C++ benchmarks:

```
508.namd_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

```
510.parest_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
503.bwaves_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3 -auto  
-nostandard-realloc-lhs
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650  
(2.50 GHz, Intel Xeon Platinum 8180)

SPECrate2017\_fp\_base = 263

SPECrate2017\_fp\_peak = 267

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2018

Hardware Availability: Aug-2017

Software Availability: May-2018

## Peak Optimization Flags (Continued)

549.fotonik3d\_r: Same as 503.bwaves\_r

```
554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs
```

Benchmarks using both Fortran and C:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs
```

Benchmarks using both C and C++:

```
511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

```
526.blender_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -auto -nostandard-realloc-lhs
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-H.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-H.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2018-11-25 07:20:57-0500.

Report generated on 2018-12-11 14:57:21 by CPU2017 PDF formatter v6067.

Originally published on 2018-12-11.