



SPEC® CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Platinum 8170, 2.10 GHz)

SPECspeed2017_int_base = 9.23

SPECspeed2017_int_peak = 9.52

CPU2017 License: 9019


Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2019

Hardware Availability: Aug-2017

Software Availability: Nov-2018

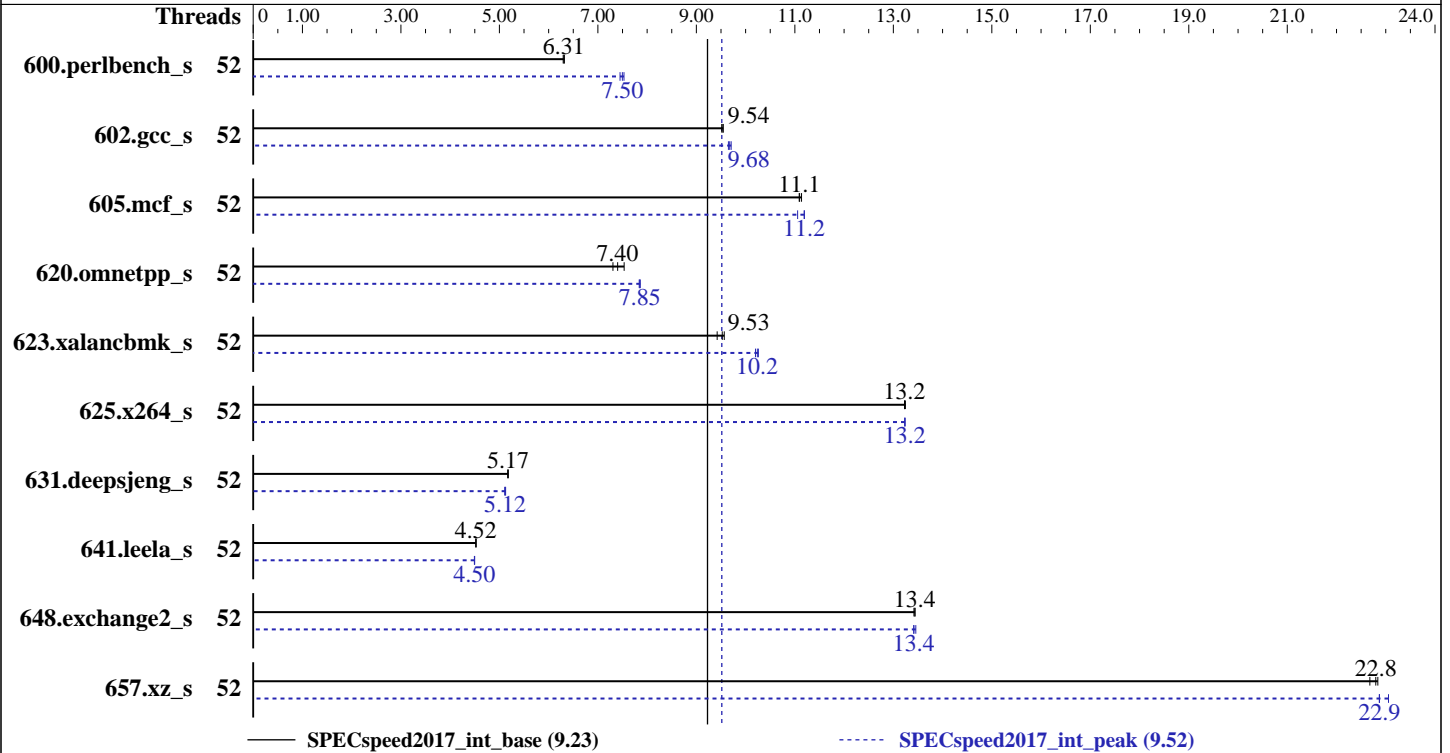

Hardware

CPU Name: Intel Xeon Platinum 8170
 Max MHz.: 3700
 Nominal: 2100
 Enabled: 52 cores, 2 chips
 Orderable: 1,2 Chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 35.75 MB I+D on chip per chip
 Other: None
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2666V-R)
 Storage: 1 x 400 GB SAS SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP2 (x86_64) 4.4.120-92.70-default
 Compiler: C/C++: Version 19.0.1.144 of Intel C/C++ Compiler for Linux;
 Fortran: Version 19.0.1.144 of Intel Fortran Compiler for Linux
 Parallel: Yes
 Firmware: Version 4.0.1 released Oct-2018
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator V5.0.1



SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Platinum 8170, 2.10 GHz)

SPECspeed2017_int_base = 9.23

SPECspeed2017_int_peak = 9.52

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Jan-2019
Hardware Availability: Aug-2017
Software Availability: Nov-2018

Results Table

Benchmark	Base						Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	52	282	6.30	<u>281</u>	<u>6.31</u>	281	6.32	52	238	7.45	236	7.53	<u>237</u>	<u>7.50</u>
602.gcc_s	52	419	9.51	417	9.54	<u>417</u>	<u>9.54</u>	52	410	9.71	<u>412</u>	<u>9.68</u>	413	9.65
605.mcf_s	52	426	11.1	<u>425</u>	<u>11.1</u>	424	11.1	52	422	11.2	427	11.1	<u>422</u>	<u>11.2</u>
620.omnetpp_s	52	223	7.31	217	7.53	<u>220</u>	<u>7.40</u>	52	208	7.84	207	7.86	<u>208</u>	<u>7.85</u>
623.xalancbmk_s	52	<u>149</u>	<u>9.53</u>	148	9.57	150	9.42	52	138	10.3	139	10.2	<u>138</u>	<u>10.2</u>
625.x264_s	52	133	13.2	133	13.2	<u>133</u>	<u>13.2</u>	52	<u>133</u>	<u>13.2</u>	133	13.2	133	13.2
631.deepsjeng_s	52	277	5.18	<u>277</u>	<u>5.17</u>	277	5.17	52	<u>280</u>	<u>5.12</u>	280	5.13	281	5.11
641.leela_s	52	377	4.52	<u>377</u>	<u>4.52</u>	377	4.53	52	380	4.49	<u>380</u>	<u>4.50</u>	379	4.50
648.exchange2_s	52	<u>219</u>	<u>13.4</u>	219	13.4	219	13.4	52	219	13.4	<u>219</u>	<u>13.4</u>	218	13.5
657.xz_s	52	<u>271</u>	<u>22.8</u>	271	22.8	273	22.7	52	<u>270</u>	<u>22.9</u>	268	23.1	270	22.9

SPECspeed2017_int_base = 9.23

SPECspeed2017_int_peak = 9.52

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64"

OMP_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>



SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Platinum 8170, 2.10 GHz)

SPECspeed2017_int_base = 9.23

SPECspeed2017_int_peak = 9.52

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Jan-2019
Hardware Availability: Aug-2017
Software Availability: Nov-2018

Platform Notes

BIOS Settings:

Intel HyperThreading Technology set to Disabled
CPU performance set to Enterprise
Power Performance Tuning set to OS Controls
SNC set to Disabled
Patrol Scrub set to Disabled
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on linux-klde Sat Jan 26 16:31:29 2019

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8170 CPU @ 2.10GHz
2 "physical id"s (chips)
52 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 26
siblings : 26
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28 29
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28 29

From lscpu:
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 52
On-line CPU(s) list: 0-51
Thread(s) per core: 1
Core(s) per socket: 26
Socket(s): 2
NUMA node(s): 2
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Platinum 8170 CPU @ 2.10GHz
Stepping: 4
CPU MHz: 1000.064
CPU max MHz: 3700.0000
CPU min MHz: 1000.0000
BogoMIPS: 4190.17
Virtualization: VT-x

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Platinum 8170, 2.10 GHz)

SPECspeed2017_int_base = 9.23

SPECspeed2017_int_peak = 9.52

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Jan-2019
Hardware Availability: Aug-2017
Software Availability: Nov-2018

Platform Notes (Continued)

L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 36608K
NUMA node0 CPU(s): 0-25
NUMA node1 CPU(s): 26-51

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts dtherm hwp hwp_act_window hwp_epp hwp_pkg_req intel_pt rsb_ctxsw spec_ctrl stibp retpoline kaiser tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc

```
/proc/cpuinfo cache data
cache size : 36608 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25
node 0 size: 385627 MB
node 0 free: 385080 MB
node 1 cpus: 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50
51
node 1 size: 387054 MB
node 1 free: 386604 MB
node distances:
node 0 1
0: 10 21
1: 21 10
```

```
From /proc/meminfo
MemTotal: 791226412 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

From /etc/*release* /etc/*version*

```
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
```

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Platinum 8170, 2.10 GHz)

SPECspeed2017_int_base = 9.23

SPECspeed2017_int_peak = 9.52

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Jan-2019
Hardware Availability: Aug-2017
Software Availability: Nov-2018

Platform Notes (Continued)

```
os-release:
  NAME="SLES"
  VERSION="12-SP2"
  VERSION_ID="12.2"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

```
uname -a:
Linux linux-klde 4.4.120-92.70-default #1 SMP Wed Mar 14 15:59:43 UTC 2018 (52a83de)
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jan 26 16:26
```

```
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3       xfs   212G  114G   98G  54% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Cisco Systems, Inc. C240M5.4.0.1.139.1003182220 10/03/2018

Memory:
24x 0xCE00 M393A4K40BB2-CTD 32 GB 2 rank 2666

(End of data from sysinfo program)

Compiler Version Notes

```
=====  
CC 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base) 625.x264_s(base,  
   peak) 657.xz_s(base)  
=====
```

```
icc (ICC) 19.0.1.144 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
=====
```

```
=====  
CC 600.perlbench_s(peak) 602.gcc_s(peak) 605.mcf_s(peak) 657.xz_s(peak)  
=====
```

```
icc (ICC) 19.0.1.144 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
=====
```

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Platinum 8170, 2.10 GHz)

SPECspeed2017_int_base = 9.23

SPECspeed2017_int_peak = 9.52

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2019

Hardware Availability: Aug-2017

Software Availability: Nov-2018

Compiler Version Notes (Continued)

```
=====
CXXC 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base)
      641.leela_s(base)
-----
```

```
icpc (ICC) 19.0.1.144 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
```

```
=====
CXXC 620.omnetpp_s(peak) 623.xalancbmk_s(peak) 631.deepsjeng_s(peak)
      641.leela_s(peak)
-----
```

```
icpc (ICC) 19.0.1.144 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
```

```
=====
FC 648.exchange2_s(base, peak)
-----
```

```
ifort (IFORT) 19.0.1.144 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
```

Base Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Base Portability Flags

```
600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
```

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Platinum 8170, 2.10 GHz)

SPECspeed2017_int_base = 9.23

SPECspeed2017_int_peak = 9.52

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Jan-2019
Hardware Availability: Aug-2017
Software Availability: Nov-2018

Base Portability Flags (Continued)

641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-L/home/cpu2017/je5.0.1-64/ -ljemalloc

C++ benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/home/cpu2017/je5.0.1-64/ -ljemalloc

Fortran benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/home/cpu2017/je5.0.1-64/ -ljemalloc

Peak Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks (except as noted below):

icpc -m64

623.xalancbmk_s: icpc -m32 -L/opt/intel/lib/ia32

Fortran benchmarks:

ifort -m64

Peak Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Platinum 8170, 2.10 GHz)

SPECspeed2017_int_base = 9.23

SPECspeed2017_int_peak = 9.52

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2019

Hardware Availability: Aug-2017

Software Availability: Nov-2018

Peak Portability Flags (Continued)

```
623.xalancbmk_s: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xCORE-AVX512 -qopt-mem-layout-trans=3 -ipo -O3
-no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -fno-strict-overflow
-L/home/cpu2017/je5.0.1-64/ -ljemalloc
```

```
602.gcc_s: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xCORE-AVX512 -qopt-mem-layout-trans=3 -ipo -O3
-no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -L/home/cpu2017/je5.0.1-64/ -ljemalloc
```

```
605.mcf_s: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-L/home/cpu2017/je5.0.1-64/ -ljemalloc
```

```
625.x264_s: -w1,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-L/home/cpu2017/je5.0.1-64/ -ljemalloc
```

657.xz_s: Same as 602.gcc_s

C++ benchmarks:

```
620.omnetpp_s: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-L/home/cpu2017/je5.0.1-64/ -ljemalloc
```

```
623.xalancbmk_s: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=3
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-L/home/cpu2017/je5.0.1-32/ -ljemalloc
```

(Continued on next page)



SPEC CPU2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C240 M5 (Intel Xeon Platinum 8170, 2.10 GHz)

SPECspeed2017_int_base = 9.23

SPECspeed2017_int_peak = 9.52

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jan-2019

Hardware Availability: Aug-2017

Software Availability: Nov-2018

Peak Optimization Flags (Continued)

631.deepsjeng_s: Same as 620.omnetpp_s

641.leela_s: Same as 620.omnetpp_s

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/home/cpu2017/je5.0.1-64/ -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.2-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.2-revH.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2019-01-26 06:01:28-0500.

Report generated on 2019-02-19 13:59:26 by CPU2017 PDF formatter v6067.

Originally published on 2019-02-19.