



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate2017\_fp\_base = 533

ThinkSystem SR850  
(2.70 GHz, Intel Xeon Platinum 8270)

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 9017


Test Date: Apr-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Dec-2018

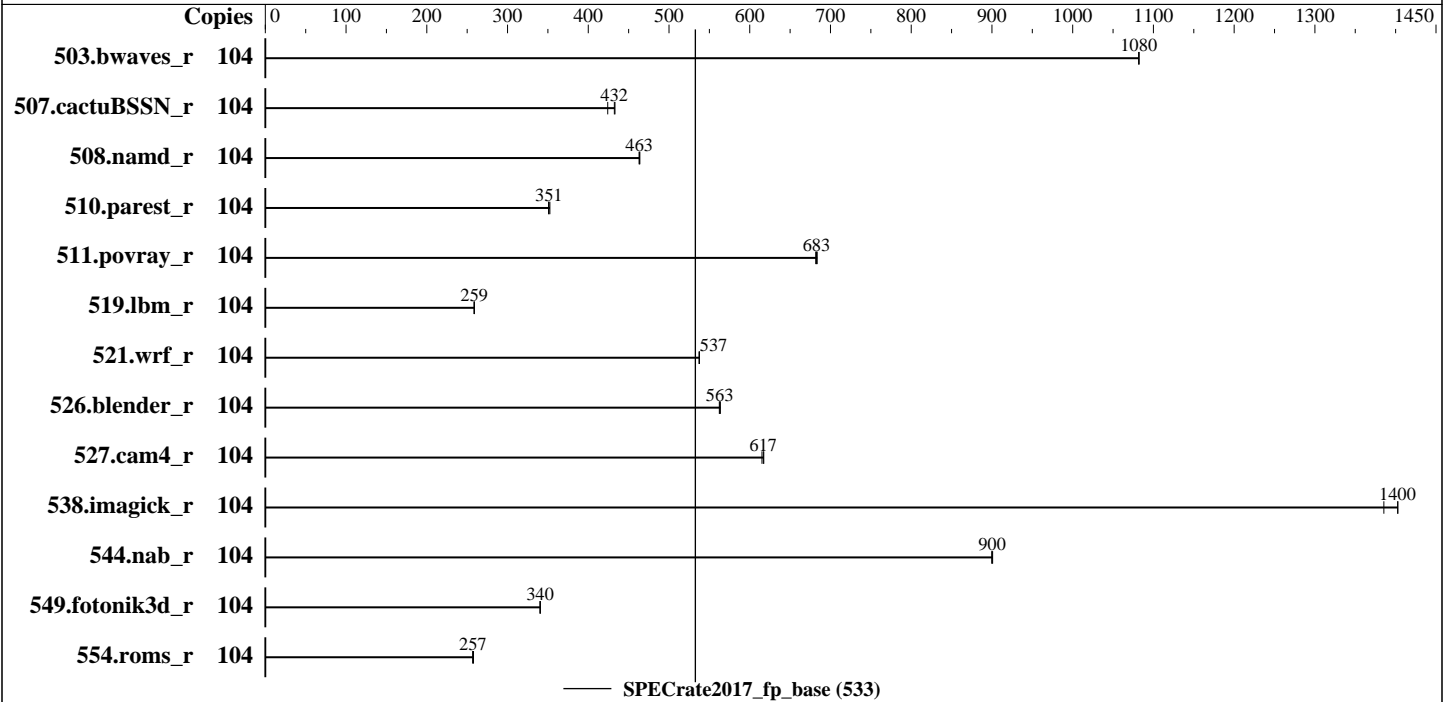

### Hardware

CPU Name: Intel Xeon Platinum 8270  
 Max MHz.: 4000  
 Nominal: 2700  
 Enabled: 104 cores, 4 chips  
 Orderable: 2,4 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 35.75 MB I+D on chip per chip  
 Other: None  
 Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2933Y-R)  
 Storage: 800 GB tmpfs  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP4 (x86\_64)  
 Kernel 4.12.14-94.41-default  
 Compiler: C/C++: Version 19.0.1.144 of Intel C/C++  
 Compiler Build 20181018 for Linux;  
 Fortran: Version 19.0.1.144 of Intel Fortran  
 Compiler Build 20181018 for Linux  
 Parallel: No  
 Firmware: Lenovo BIOS Version TEE135T 2.10 released Mar-2019  
 File System: tmpfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate2017\_fp\_base = 533

ThinkSystem SR850  
(2.70 GHz, Intel Xeon Platinum 8270)

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 9017  
Test Sponsor: Lenovo Global Technology  
Tested by: Lenovo Global Technology

Test Date: Apr-2019  
Hardware Availability: Apr-2019  
Software Availability: Dec-2018

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	104	964	1080	964	1080	<b>964</b>	<b>1080</b>							
507.cactuBSSN_r	104	<b>305</b>	<b>432</b>	310	424	304	433							
508.namd_r	104	213	463	<b>213</b>	<b>463</b>	213	464							
510.parest_r	104	772	352	<b>774</b>	<b>351</b>	776	351							
511.povray_r	104	<b>356</b>	<b>683</b>	356	682	355	684							
519.lbm_r	104	424	259	<b>424</b>	<b>259</b>	423	259							
521.wrf_r	104	433	538	<b>433</b>	<b>537</b>	434	537							
526.blender_r	104	282	562	281	564	<b>281</b>	<b>563</b>							
527.cam4_r	104	296	615	295	617	<b>295</b>	<b>617</b>							
538.imagick_r	104	184	1400	187	1390	<b>184</b>	<b>1400</b>							
544.nab_r	104	194	901	<b>194</b>	<b>900</b>	195	900							
549.fotonik3d_r	104	<b>1191</b>	<b>340</b>	1191	340	1190	341							
554.roms_r	104	<b>642</b>	<b>257</b>	644	257	641	258							

SPECrate2017\_fp\_base = 533

SPECrate2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Tmpfs filesystem can be set with:  
mount -t tmpfs -o size=800g tmpfs /home  
Process tuning setting:  
echo 50000 > /proc/sys/kernel/sched\_cfs\_bandwidth\_slice\_us  
echo 240000000 > /proc/sys/kernel/sched\_latency\_ns  
echo 5000000 > /proc/sys/kernel/sched\_migration\_cost\_ns  
echo 100000000 > /proc/sys/kernel/sched\_min\_granularity\_ns  
echo 150000000 > /proc/sys/kernel/sched\_wakeup\_granularity\_ns

## General Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017-1.0.5-ic19.0u1/lib/intel64"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.5

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECrate2017\_fp\_base = 533

ThinkSystem SR850  
(2.70 GHz, Intel Xeon Platinum 8270)

SPECrate2017\_fp\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Apr-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Dec-2018

## General Notes (Continued)

Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

- Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
- Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
- Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.
- Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a) is mitigated in the system as tested and documented.
- Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:  
Choose Operating Mode set to Maximum Performance  
Choose Operating Mode set to Custom Mode  
C-states set to Legacy  
Hyper-Threading set to Disable  
Sysinfo program /home/cpu2017-1.0.5-ic19.0ul/bin/sysinfo  
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9  
running on linux-9o83 Tue Apr 16 07:30:55 2019

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Platinum 8270 CPU @ 2.70GHz  
4 "physical id"s (chips)  
104 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 26  
siblings : 26  
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28 29  
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28 29  
physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28 29

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate2017\_fp\_base = 533

ThinkSystem SR850  
(2.70 GHz, Intel Xeon Platinum 8270)

SPECrate2017\_fp\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Apr-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Dec-2018

### Platform Notes (Continued)

physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 22 24 25 26 27 28 29

From lscpu:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                104
On-line CPU(s) list:   0-103
Thread(s) per core:    1
Core(s) per socket:    26
Socket(s):             4
NUMA node(s):         4
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Platinum 8270 CPU @ 2.70GHz
Stepping:              6
CPU MHz:               2700.000
CPU max MHz:           4000.0000
CPU min MHz:           1000.0000
BogoMIPS:              5400.00
Virtualization:        VT-x
L1d cache:             32K
L1i cache:             32K
L2 cache:              1024K
L3 cache:              36608K
NUMA node0 CPU(s):    0-25
NUMA node1 CPU(s):    26-51
NUMA node2 CPU(s):    52-77
NUMA node3 CPU(s):    78-103

```

```

Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx fl6c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single ssbd mba ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid
fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f
avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
dtherm ida arat pln pts pku ospke avx512_vnni flush_lld arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 36608 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

SPECrate2017\_fp\_base = 533

ThinkSystem SR850  
(2.70 GHz, Intel Xeon Platinum 8270)

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Apr-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Dec-2018

### Platform Notes (Continued)

```

physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25
node 0 size: 386634 MB
node 0 free: 386174 MB
node 1 cpus: 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50
51
node 1 size: 387056 MB
node 1 free: 374452 MB
node 2 cpus: 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76
77
node 2 size: 387056 MB
node 2 free: 386771 MB
node 3 cpus: 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101
102 103
node 3 size: 387054 MB
node 3 free: 386286 MB
node distances:
node 0 1 2 3
0: 10 21 21 31
1: 21 10 31 21
2: 21 31 10 21
3: 31 21 21 10

```

```

From /proc/meminfo
MemTotal: 1584949172 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

```

```

From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 4
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP4"
VERSION_ID="12.4"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp4"

```

```

uname -a:
Linux linux-9o83 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901)

```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECrate2017\_fp\_base = 533

ThinkSystem SR850  
(2.70 GHz, Intel Xeon Platinum 8270)

SPECrate2017\_fp\_peak = Not Run

**CPU2017 License:** 9017  
**Test Sponsor:** Lenovo Global Technology  
**Tested by:** Lenovo Global Technology

**Test Date:** Apr-2019  
**Hardware Availability:** Apr-2019  
**Software Availability:** Dec-2018

## Platform Notes (Continued)

x86\_64 x86\_64 x86\_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown): Not affected  
CVE-2017-5753 (Spectre variant 1): Mitigation: \_\_user pointer sanitization  
CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation, IBPB, IBRS\_FW

run-level 3 Apr 16 07:25

SPEC is set to: /home/cpu2017-1.0.5-ic19.0u1  
Filesystem Type Size Used Avail Use% Mounted on  
tmpfs tmpfs 800G 8.3G 792G 2% /home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Lenovo -[TEE135T-2.10]- 03/21/2019  
Memory:  
48x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933

(End of data from sysinfo program)

## Compiler Version Notes

=====  
CC 519.lbm\_r(base) 538.imagick\_r(base) 544.nab\_r(base)  
-----

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
CXXC 508.namd\_r(base) 510.parest\_r(base)  
-----

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----

=====  
CC 511.povray\_r(base) 526.blender\_r(base)  
-----

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECrate2017\_fp\_base = 533

ThinkSystem SR850  
(2.70 GHz, Intel Xeon Platinum 8270)

SPECrate2017\_fp\_peak = Not Run

**CPU2017 License:** 9017

**Test Date:** Apr-2019

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Apr-2019

**Tested by:** Lenovo Global Technology

**Software Availability:** Dec-2018

## Compiler Version Notes (Continued)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====  
FC 507.cactuBSSN\_r(base)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====  
FC 503.bwaves\_r(base) 549.fotonik3d\_r(base) 554.roms\_r(base)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====  
CC 521.wrf\_r(base) 527.cam4\_r(base)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017\_fp\_base = 533

ThinkSystem SR850  
(2.70 GHz, Intel Xeon Platinum 8270)

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Apr-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: Dec-2018

## Base Compiler Invocation (Continued)

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using both C and C++:

icpc -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64

507.cactuBSSN\_r: -DSPEC\_LP64

508.namd\_r: -DSPEC\_LP64

510.parest\_r: -DSPEC\_LP64

511.povray\_r: -DSPEC\_LP64

519.lbm\_r: -DSPEC\_LP64

521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian

526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char

527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG

538.imagick\_r: -DSPEC\_LP64

544.nab\_r: -DSPEC\_LP64

549.fotonik3d\_r: -DSPEC\_LP64

554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch

-ffinite-math-only -qopt-mem-layout-trans=4

C++ benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch

-ffinite-math-only -qopt-mem-layout-trans=4

(Continued on next page)





# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

**Lenovo Global Technology**

SPECrate2017\_fp\_base = 533

ThinkSystem SR850  
(2.70 GHz, Intel Xeon Platinum 8270)

SPECrate2017\_fp\_peak = Not Run

**CPU2017 License:** 9017

**Test Date:** Apr-2019

**Test Sponsor:** Lenovo Global Technology

**Hardware Availability:** Apr-2019

**Tested by:** Lenovo Global Technology

**Software Availability:** Dec-2018

## Base Optimization Flags (Continued)

Fortran benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -auto  
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -auto  
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -auto  
-nostandard-realloc-lhs -align array32byte
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-A.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2019-04-15 19:30:55-0400.

Report generated on 2019-04-30 17:45:21 by CPU2017 PDF formatter v6067.

Originally published on 2019-04-30.