



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 205

PowerEdge R6515 (AMD EPYC 7502P, 2.50 GHz)

SPECrate®2017_int_peak = 222

CPU2017 License: 55


Test Date: Aug-2019

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2019

Tested by: Dell Inc.

Software Availability: Aug-2019

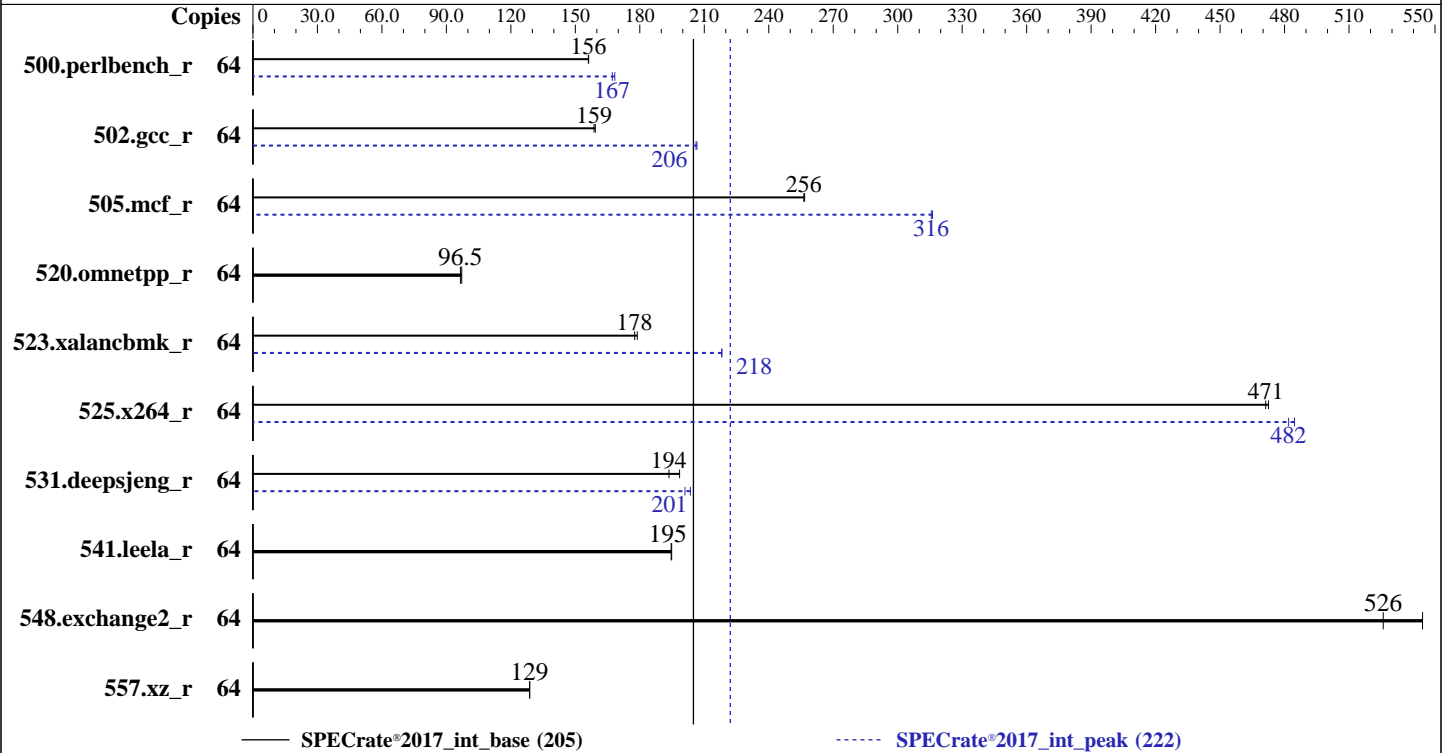

Hardware

CPU Name: AMD EPYC 7502P
 Max MHz: 3350
 Nominal: 2500
 Enabled: 32 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 128 MB I+D on chip per chip, 16 MB shared / 4 cores
 Other: None
 Memory: 256 GB (8 x 32 GB 2Rx4 PC4-3200AA-R, running at 3200)
 Storage: 1 x 960 GB SATA SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP1
 kernel 4.12.14-195-default
 4.12.14-195-default
 Compiler: C/C++/Fortran: Version 2.0.0 of AOCC
 Parallel: No
 Firmware: Version 1.0.3 released Aug-2019
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc: jemalloc memory allocator library v5.2.0
 Power Management: --



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 205

PowerEdge R6515 (AMD EPYC 7502P, 2.50 GHz)

SPECrate®2017_int_peak = 222

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Aug-2019
Hardware Availability: Sep-2019
Software Availability: Aug-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	64	652	156	653	156			64	609	167	605	168		
502.gcc_r	64	569	159	571	159			64	439	207	440	206		
505.mcf_r	64	403	256	403	257			64	328	316	327	316		
520.omnetpp_r	64	870	96.5	864	97.1			64	870	96.5	864	97.1		
523.xalancbmk_r	64	378	179	381	178			64	310	218	310	218		
525.x264_r	64	237	473	238	471			64	233	482	231	485		
531.deepsjeng_r	64	379	194	369	199			64	360	204	365	201		
541.leela_r	64	544	195	545	195			64	544	195	545	195		
548.exchange2_r	64	319	526	308	544			64	319	526	308	544		
557.xz_r	64	537	129	537	129			64	537	129	537	129		

SPECrate®2017_int_base = 205

SPECrate®2017_int_peak = 222

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
sync then drop_caches=3 to reset caches before invoking runcpu

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 205

PowerEdge R6515 (AMD EPYC 7502P, 2.50 GHz)

SPECrate®2017_int_peak = 222

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Aug-2019

Hardware Availability: Sep-2019

Software Availability: Aug-2019

Operating System Notes (Continued)

Transparent huge pages set to 'always' for this run (OS default)

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/root/cpu2017-1.0.5/amd_rate_aocc200_rome_B_lib/64;
/root/cpu2017-1.0.5/amd_rate_aocc200_rome_B_lib/32"
MALLOCONF = "retain:true"

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using Fedora 26

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v9.1.0 in Ubuntu 19.04 with -O3 -znver2 -flto
jemalloc 5.2.0 is available here:
<https://github.com/jemalloc/jemalloc/releases/download/5.2.0/jemalloc-5.2.0.tar.bz2>

Platform Notes

BIOS settings:
NUMA Nodes Per Socket set to 4
CCX as NUMA Domain set to Enabled
System Profile set to Custom
CPU Power Management set to Maximum Performance
Memory Frequency set to Maximum Performance
Turbo Boost Enabled
C states set to Enabled
Memory Patrol Scrub Disabled
Memory Refresh Rate set to 1x
PCI ASPM L1 Link Power Management Disabled
Determinism Slider set to Power Determinism
Efficiency Optimized Mode Disabled
Sysinfo program /root/cpu2017-1.0.5/bin/sysinfo
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on linux-g30b Mon Aug 26 15:28:03 2019

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 205

PowerEdge R6515 (AMD EPYC 7502P, 2.50 GHz)

SPECrate®2017_int_peak = 222

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Aug-2019

Hardware Availability: Sep-2019

Software Availability: Aug-2019

Platform Notes (Continued)

From /proc/cpuinfo

model name : AMD EPYC 7502P 32-Core Processor

1 "physical id"s (chips)

64 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 32

siblings : 64

physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

Address sizes: 43 bits physical, 48 bits virtual

CPU(s): 64

On-line CPU(s) list: 0-63

Thread(s) per core: 2

Core(s) per socket: 32

Socket(s): 1

NUMA node(s): 8

Vendor ID: AuthenticAMD

CPU family: 23

Model: 49

Model name: AMD EPYC 7502P 32-Core Processor

Stepping: 0

CPU MHz: 2495.461

BogoMIPS: 4990.92

Virtualization: AMD-V

L1d cache: 32K

L1i cache: 32K

L2 cache: 512K

L3 cache: 16384K

NUMA node0 CPU(s): 0-3,32-35

NUMA node1 CPU(s): 4-7,36-39

NUMA node2 CPU(s): 8-11,40-43

NUMA node3 CPU(s): 12-15,44-47

NUMA node4 CPU(s): 16-19,48-51

NUMA node5 CPU(s): 20-23,52-55

NUMA node6 CPU(s): 24-27,56-59

NUMA node7 CPU(s): 28-31,60-63

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl xtopology nonstop_tsc cpuid extd_apicid aperfmperf pni
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 205

PowerEdge R6515 (AMD EPYC 7502P, 2.50 GHz)

SPECrate®2017_int_peak = 222

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Aug-2019

Hardware Availability: Sep-2019

Software Availability: Aug-2019

Platform Notes (Continued)

osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx cpb cat_l3 cdp_l3 hw_pstate sme ssbd sev ibrs ibpb stibp vmmcall fsgsbase bml avx2 smep bmi2 cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif umip rdpid overflow_recov succor smca

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 3 32 33 34 35
node 0 size: 31691 MB
node 0 free: 31488 MB
node 1 cpus: 4 5 6 7 36 37 38 39
node 1 size: 32253 MB
node 1 free: 32105 MB
node 2 cpus: 8 9 10 11 40 41 42 43
node 2 size: 32254 MB
node 2 free: 32160 MB
node 3 cpus: 12 13 14 15 44 45 46 47
node 3 size: 32253 MB
node 3 free: 32161 MB
node 4 cpus: 16 17 18 19 48 49 50 51
node 4 size: 32224 MB
node 4 free: 32132 MB
node 5 cpus: 20 21 22 23 52 53 54 55
node 5 size: 32253 MB
node 5 free: 32144 MB
node 6 cpus: 24 25 26 27 56 57 58 59
node 6 size: 32254 MB
node 6 free: 32149 MB
node 7 cpus: 28 29 30 31 60 61 62 63
node 7 size: 32240 MB
node 7 free: 32138 MB
```

```
node distances:
node  0  1  2  3  4  5  6  7
 0:  10 11 12 12 12 12 12 12
 1:  11 10 12 12 12 12 12 12
 2:  12 12 10 11 12 12 12 12
 3:  12 12 11 10 12 12 12 12
 4:  12 12 12 12 10 11 12 12
 5:  12 12 12 12 11 10 12 12
 6:  12 12 12 12 12 12 10 11
 7:  12 12 12 12 12 12 11 10
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 205

PowerEdge R6515 (AMD EPYC 7502P, 2.50 GHz)

SPECrate®2017_int_peak = 222

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Aug-2019

Hardware Availability: Sep-2019

Software Availability: Aug-2019

Platform Notes (Continued)

From /proc/meminfo

```
MemTotal:      263606296 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

From /etc/*release* /etc/*version*

```
os-release:
NAME="SLES"
VERSION="15-SP1"
VERSION_ID="15.1"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp1"
```

uname -a:

```
Linux linux-g3ob 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown):          Not affected
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline, IBPB: conditional,
IBRS_FW, STIBP: conditional, RSB filling
```

run-level 3 Aug 26 15:27 last=5

SPEC is set to: /root/cpu2017-1.0.5

```
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda2        xfs       440G   39G  402G   9% /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS Dell Inc. 1.0.3 08/23/2019
Memory:
8x 802C8632802C 36ASF4G72PZ-3G2E2 32 GB 2 rank 3200
8x Not Specified Not Specified
```

(End of data from sysinfo program)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 205

PowerEdge R6515 (AMD EPYC 7502P, 2.50 GHz)

SPECrate®2017_int_peak = 222

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Aug-2019

Hardware Availability: Sep-2019

Software Availability: Aug-2019

Compiler Version Notes

=====
C | 502.gcc_r(peak)

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
525.x264_r(base, peak) 557.xz_r(base, peak)

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====
C | 502.gcc_r(peak)

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====
C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
525.x264_r(base, peak) 557.xz_r(base, peak)

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin

=====
C++ | 523.xalancbmk_r(peak)

AOCC.LLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
AOCC_2_0_0-Build#191) (based on LLVM AOCC.LLVM.2.0.0.B191.2019_07_19)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 205

PowerEdge R6515 (AMD EPYC 7502P, 2.50 GHz)

SPECrate®2017_int_peak = 222

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Aug-2019

Hardware Availability: Sep-2019

Software Availability: Aug-2019

Compiler Version Notes (Continued)

```

Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
-----

```

```

=====
C++      | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
          | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
-----

```

```

AOCCLLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCCLLVM.2.0.0.B191.2019_07_19) (based on LLVM AOCCLLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
-----

```

```

=====
C++      | 523.xalancbmk_r(peak)
-----

```

```

AOCCLLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCCLLVM.2.0.0.B191.2019_07_19) (based on LLVM AOCCLLVM.2.0.0.B191.2019_07_19)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
-----

```

```

=====
C++      | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
          | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)
-----

```

```

AOCCLLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCCLLVM.2.0.0.B191.2019_07_19) (based on LLVM AOCCLLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
-----

```

```

=====
Fortran  | 548.exchange2_r(base, peak)
-----

```

```

AOCCLLVM.2.0.0.B191.2019_07_19 clang version 8.0.0 (CLANG: Jenkins
  AOCCLLVM.2.0.0.B191.2019_07_19) (based on LLVM AOCCLLVM.2.0.0.B191.2019_07_19)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /sppo/dev/compilers/aocc-compiler-2.0.0/bin
-----

```




SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 205

PowerEdge R6515 (AMD EPYC 7502P, 2.50 GHz)

SPECrate®2017_int_peak = 222

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Aug-2019

Hardware Availability: Sep-2019

Software Availability: Aug-2019

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -reduce-array-computations=3 -mllvm -global-vectorize-slp
-mllvm -vector-library=LIBMVEC -mllvm -inline-threshold=1000
-flv-function-specialization -z muldefs -lmvec -lamdlibm -ljemalloc
-lflang
```

C++ benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-suppress-fmas -O3 -ffast-math -march=znver2
-mllvm -loop-unswitch-threshold=200000 -mllvm -vector-library=LIBMVEC
-mllvm -unroll-threshold=100 -flv-function-specialization
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 205

PowerEdge R6515 (AMD EPYC 7502P, 2.50 GHz)

SPECrate®2017_int_peak = 222

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Aug-2019

Hardware Availability: Sep-2019

Software Availability: Aug-2019

Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-mllvm -enable-partial-unswitch -z muldefs -lmvec -lamdlibm  
-ljemalloc -lflang
```

Fortran benchmarks:

```
-flto -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-vector-library=LIBMVEC  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -ffast-math  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver2 -funroll-loops  
-Mrecursive -mllvm -vector-library=LIBMVEC -z muldefs  
-mllvm -disable-indvar-simplify -mllvm -unroll-aggressive  
-mllvm -unroll-threshold=150 -lmvec -lamdlibm -ljemalloc -lflang
```

Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64  
502.gc_r: -D_FILE_OFFSET_BITS=64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -DSPEC_LINUX -D_FILE_OFFSET_BITS=64  
525.x264_r: -DSPEC_LP64  
531.deepsjeng_r: -DSPEC_LP64  
541.leela_r: -DSPEC_LP64  
548.exchange2_r: -DSPEC_LP64  
557.xz_r: -DSPEC_LP64
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 205

PowerEdge R6515 (AMD EPYC 7502P, 2.50 GHz)

SPECrate®2017_int_peak = 222

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Aug-2019

Hardware Availability: Sep-2019

Software Availability: Aug-2019

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver2
-mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -lmvec -lamdlibm -ljemalloc
-lflang
```

```
502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -fgnu89-inline -ljemalloc
```

```
505.mcf_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -mno-sse4a -fstruct-layout=5
-mllvm -vectorize-memory-aggressively
-mllvm -function-specialize -mllvm -enable-gvn-hoist
-mllvm -unroll-threshold=50 -fremap-arrays
-mllvm -vector-library=LIBMVEC
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp -mllvm -inline-threshold=1000
-flv-function-specialization -lmvec -lamdlibm -ljemalloc
-lflang
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 205

PowerEdge R6515 (AMD EPYC 7502P, 2.50 GHz)

SPECrate®2017_int_peak = 222

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Aug-2019

Hardware Availability: Sep-2019

Software Availability: Aug-2019

Peak Optimization Flags (Continued)

525.x264_r: Same as 500.perlbench_r

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: -m32 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -flv-function-specialization
-mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -ljemalloc

531.deepsjeng_r: -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-vector-library=LIBMVEC
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver2 -flv-function-specialization
-mllvm -unroll-threshold=100
-mllvm -enable-partial-unswitch
-mllvm -loop-unswitch-threshold=200000
-mllvm -vector-library=LIBMVEC
-mllvm -inline-threshold=1000 -lmvec -lamdlibm -ljemalloc
-lflang

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

Peak Other Flags

C benchmarks:

502.gcc_r: -L/sppo/dev/cpu2017/amd_rate_aocc200_rome/amd_rate_aocc200_rome_B_lib/32

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 205

PowerEdge R6515 (AMD EPYC 7502P, 2.50 GHz)

SPECrate®2017_int_peak = 222

CPU2017 License: 55

Test Date: Aug-2019

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2019

Tested by: Dell Inc.

Software Availability: Aug-2019

Peak Other Flags (Continued)

C++ benchmarks:

523.xalancbmk_r: -L/spo/dev/cpu2017/amd_rate_aocc200_rome/amd_rate_aocc200_rome_B_lib/32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc200-flags-B1.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE4.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc200-flags-B1.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE4.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.0.5 on 2019-08-26 16:28:03-0400.

Report generated on 2019-09-17 16:07:09 by CPU2017 PDF formatter v6255.

Originally published on 2019-09-17.